

570 CA1 SG

5" x 7" Access 1 coaxial

- Adjustable aluminum inverted dome tweeter
- All weather woven glass fiber cone
- 85mm (3-1/3") magnet




Specifications

Nominal power	60W
Maximum power	120W
Sensitivity	91dB
Cone	Braided glass fiber®
Surround	Butyl
Nom. impedance	4 Ohms
DC resistance	2.93 Ohms
VC diameter	25mm
VC height	11 mm 07/16"
Former	Kapton®
Layers	2
Wire	Copper
Inductance	-
Xmax	2.5mm 01/8"
Magnet d x h	85 x 15mm 3 3/8" x 0 9/16"
Magnet weight	0.3kg 0.66lb
Flux density	1.1T
Gap height	5mm 03/16"
Net weight	0.95kg 2.09lb

Parameters

Fs	773Hz
Vas	9.99l
Qts	0.84
Qes	0.95
Qms	7.63
Re	2.93 Ohms
Sd	153.94cm ²
Cas	7.01E - 08m ⁵ /N
Mas	60.47kg/m ⁴
Ras	3849.37 Ohms.ac
Cms	2.96E - 04m/N
Mms	14.33g
Rms	0.912kg/s
Ces	667.57mF
Les	6.35mH
Res	24.54 Ohms
Bl	4.63 N/A
SPL	88.7dB/W/m

Frequency Response / Impedance

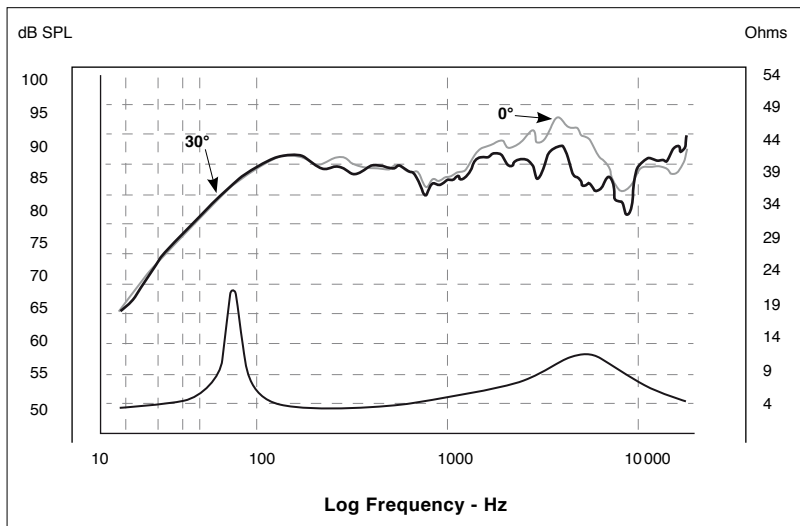

Suggested application

Load	V (l)	Fb (Hz)	F-3 (Hz)	Ql
Sealed	30	-	71	0.97

Mechanical Drawing

