

690 CA1 SG

6" x 9" Access 1 coaxial (Aftersales Dpt ref: 6" x 9" CA1)

- Adjustable aluminum inverted dome tweeter
- All weather woven glass fiber cone
- Voice coil cooling system




Specifications

Nominal power	75W
Maximum power	150W
Sensitivity	91dB
Cone	Braided glass fiber®
Surround	Butyl
Nom. impedance	4 Ohms
DC resistance	4 Ohms
VC diameter	32mm 1"
VC height	11 mm 07/16"
Former	Kapton®
Layers	2
Wire	Copper
Inductance	-
Xmax	2.5mm 01/8"
Magnet d x h	90 x 15mm 39/16" x 09/16"
Magnet weight	0.4kg 0.88lb
Flux density	0.95T
Gap height	6mm 01/4"
Net weight	1.1kg 1.87lb

Parameters

Fs	66.83Hz
Vas	17.48l
Qts	0.881
Qes	1.05
Qms	5.47
Re	3.93 Ohms
Sd	221 cm ²
Cas	1.24 E - 07m ² /N
Mas	45.57kg/m ⁴
Ras	3497.85 Ohms.ac
Cms	2.53E - 04m/N
Mms	22.39g
Rms	1.719kg/s
Ces	636.28mF
Les	8.91mH
Res	20.47 Ohms
Bl	5.93 N/A
SPL	88.8dB/W/m

Frequency Response / Impedance

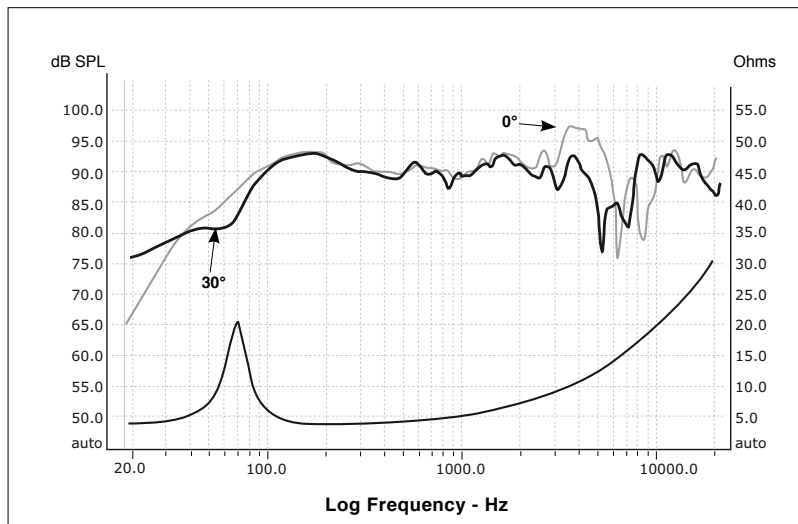

Suggested application

Load	V (l)	Fb (Hz)	F-3 (Hz)	Ql
Sealed	150	-	47	0,93

Mechanical Drawing

