


SOLID 4

Quality 4 channel amplifier

- Small size
Easy integration in a vehicle

- Aluminum chassis
High thermal dissipation

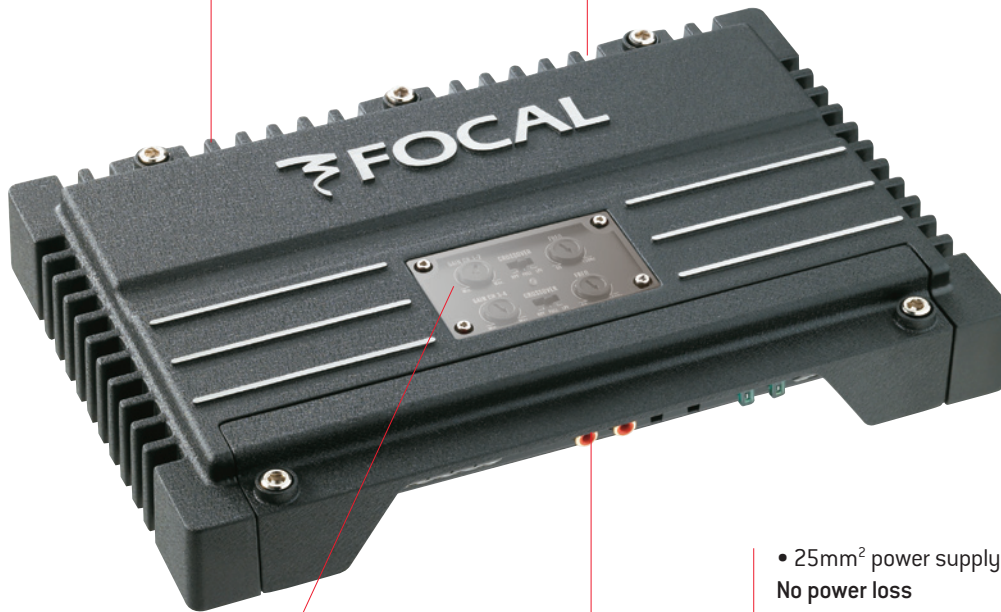

- Remote control
Keep the control



- High-pass and low-pass crossover
Numerous settings available

- 25mm² power supply terminal
No power loss
- High and low-level inputs
Suits any installation
- "Auto Power On" on the high-level input
Easy wiring
- Fader
Benefit from the 4 channels while using only 2 RCA
- Pseudo-balanced inputs
Floating ground, no parasite

Technical characteristics:

Power under 4 Ohms: 4x75W
Power under 2 Ohms: 4x100W
Bridged mode under 4 Ohms: 2x200W
Frequency response: 10 Hz–60kHz
Signal/noise ratio: >80dB (A)
Adjustable gain
Dimensions (HxLxD): 45x300x200mm (1^{3/4}x11^{13/16}x7^{7/8}")
Protections: Short-circuit, continuous current, thermal overload



It makes the difference:

- 3 channel use with bass adjustment
- High-level input, fits the original system
- Secure and easily accessible settings
- Aluminum chassis
- Remote control

