


PROFILE IC 908

Product specification sheet

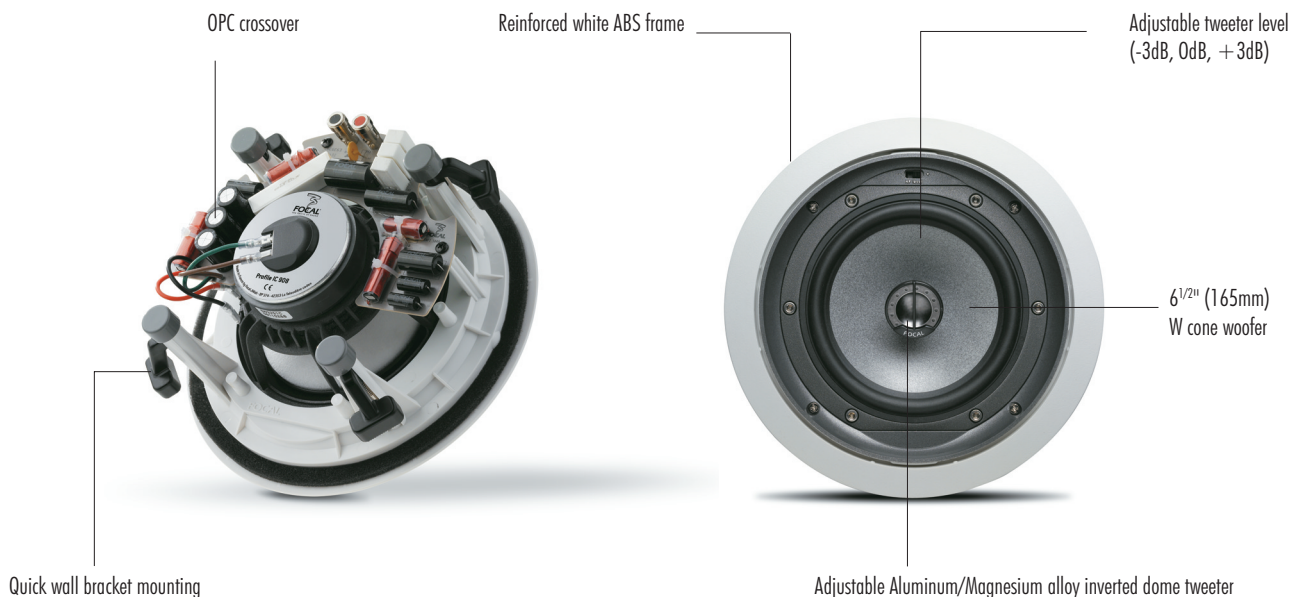

- ◆ Exclusives Focal technologies : W sandwich composite cone, Al/Mg inverted dome tweeter, OPC crossover...
- ◆ Very high power handling.
- ◆ Wall Boost Control to reduce the "wall effect".
- ◆ Optional MDF/steel back box BB6.
- ◆ Optional mounting kit.

Type	2-way In-Ceiling speaker
Drivers	6 1/2" (16.5cm) "W" midbass. 1" (25mm) Al/Mg inverted dome tweeter
Frequency response [+/-3dB]	60Hz - 30.5kHz
Sensitivity [2,83V/1m]	88dB
Nom. impedance	8Ω
Protection	Autoreset Polyswitch fuse
Recommended amplifier power	25 - 150W
Adjustment	Tweeter: - 3dB / 0dB / +3dB
Crossover frequency	2 600Hz
Frame size (HxWxD)	ø 10x3 3/4" (ø 253x96mm)
Cut-out dimensions (HxW)	ø 8 1/16" (221mm)
Depth from wall	3 5/8" (92mm)
Net weight	4.6 lbs (2,1kg)

*The IC 908 demands the status of **alternative solution**, as **ultra-easy to integrate** as the traditional bookshelf loudspeaker. Its inverted dome tweeter in **Aluminum/Magnesium alloy**, 6 1/2" (16.5cm) woofer in **W sandwich composite**, and **OPC (Optimum Phase Crossover)** are just a few of the most advanced technological solutions to come out of Focal's R&D laboratories.*



FOCAL
the Spirit of Sound