


PROFILE IW 908

Product specification sheet

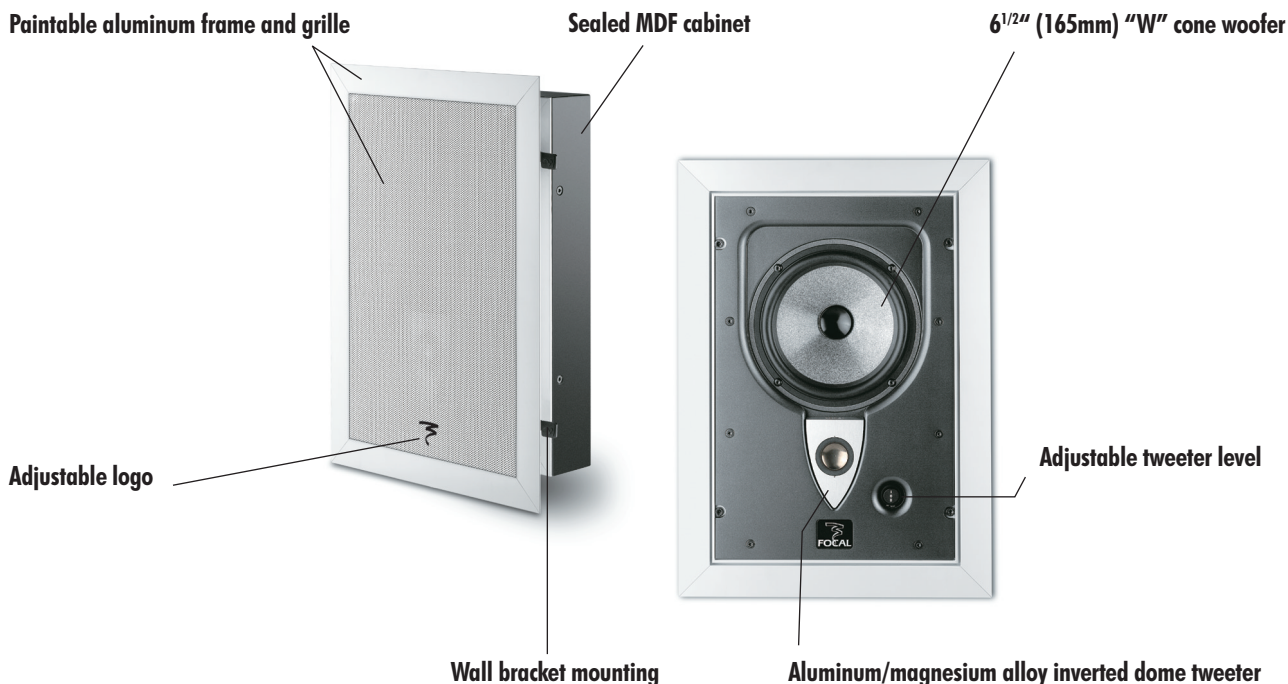

Features

- True high-end **sealed cabinet design** for optimal bass response
- **Easy mounting** aluminum die-cast system
- **Aluminum/magnesium alloy inverted dome tweeter**, Poron surround, frequency response up to 30kHz, SACD and DVD-Audio compatibility
- **Latest generation composite "W"** sandwich cones
- **OPC** filtering for optimal control of phase
- Very **high power** handling
- **Wall Boost Control** to reduce the "wall effect"
- Optional mounting kit (only for new construction)

Technical specifications

Type	Sealed enclosure in-wall speaker
Drivers	6.5" (165mm) "W" cone midbass, 1 1/4" (25mm) voice-coil 1" (25mm) Al/Mg inverted dome tweeter
Frequency response (+/-3dB)	60Hz - 30.5kHz
Sensitivity (2,83V/1m)	88dB
Nom. impedance	8Ω
Crossover frequency	2600Hz
Protection	Autoreset Polyswitch fuse
Max. power	80Watts
Tweeter ajustement	3 positions
Dimensions (HxWxD)	16 3/8 x 11 3/4 x 4" (415x298x102mm)
Cut-out dimensions (HxW)	14 7/8 x 10 3/8" (379x262mm)
Depth from wall	3 7/8" (99mm)
Net weight	13.6lbs (6.2kg)

