


PROFILE SR 908

Product specification sheet

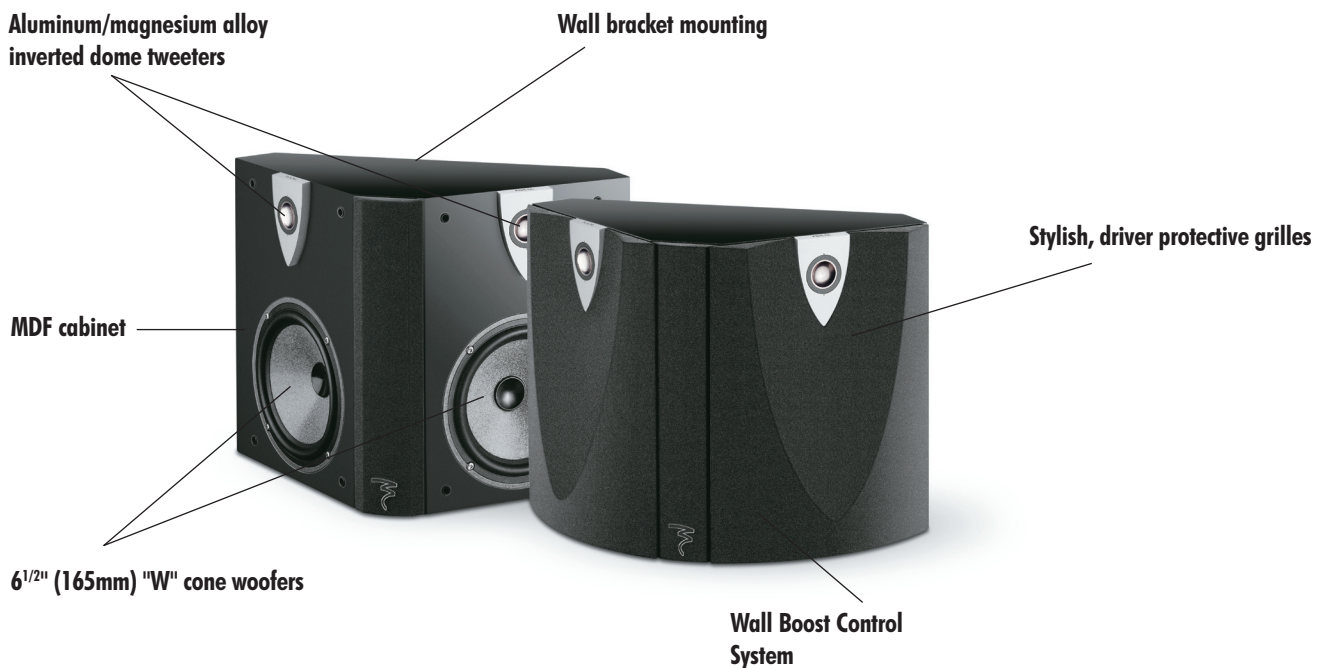

Features

- 2-way **bipolar effects** loudspeaker, 4 speakers
- High **performance, compact** size
- **Wide dispersion design**
- **Aluminum/magnesium alloy inverted dome tweeter**, Poron® surround, frequency response up to 30kHz
- **"W" composite sandwich** cones
- **OPC crossover** for perfect phase alignment
- Easy to install **wall bracket system**
- **Wall Boost Control** : to reduce the " wall effect "
- **Black Satin finish.**

Technical specifications

Type	2-way, sealed, bipolar effects loudspeaker
Drivers	Two 1" (2.5cm) Al/Mg inverted dome tweeters Two 6 1/2" (16.5cm) W cone woofers
Frequency response (+/- 3dB)	75Hz to 30.5kHz
Sensitivity (2.83V/1m)	91dB
Nominal impedance	8Ω
Minimum impedance	5.2Ω at 350Hz
Max Power handling	175W
Crossover frequency	2600Hz
Dimensions (HxWxD)	11 5/8" x 15 7/8" x 7 5/8" (295x403x194mm)
Weight	19.4lbs (8.8kg)

