

RIP LINE

570 C (180 Watts)

SPECIFICATIONS

Nominal power	50W
Maximum power	180W
Sensitivity	91.6dB
Cone	Polypropylene
Surround	Rubber
Nom. impedance	4 Ohms
DC resistance	2.8 Ohms
VC diameter	25.5mm
Former	Kapton®
Layers	2
Wire	Copper
Inductance	-
Xmax	3mm
Magnet	Ceramic
Magnet weight	750g
Magnet	85x32x15mm (3 ^{1/3} x1 ^{1/4} x0 ^{9/16} "
T Yoke	5x80x24.95x20x10H
Washer	5x80x27.5mm (0 ^{3/16} x3 ^{1/8} x1 ^{1/16} "
Flux density	
Gap height	5mm (0 ^{3/16} "
Net weight	950g

PARAMETERS


Fs	89.76Hz
Vas	5.81 litres
Qts	1.03
Qes	1.25
Qms	5.96
Re	2.8 Ohms
Sd	154cm ²
Cas	4.14E-08m ⁵ /N
Mas	75.96kg/m ⁴
Ras	7187.82 Ohms.oc
Cms	1.75E-04m/N
Mms	18g
Rms	1.703kg/s
Ces	791.57mF
Les	3.97mH
Res	13.35 Ohms
Bl	4.77 N/A
SPL	87.11dB



KEY POINTS

- 1" (25.5mm) voice coil on Kapton® former
- Dual layer voice coil
- Polypropylene cone
- High rigidity metal basket
- Rain cover integrated in basket

FREQUENCY RESPONSE

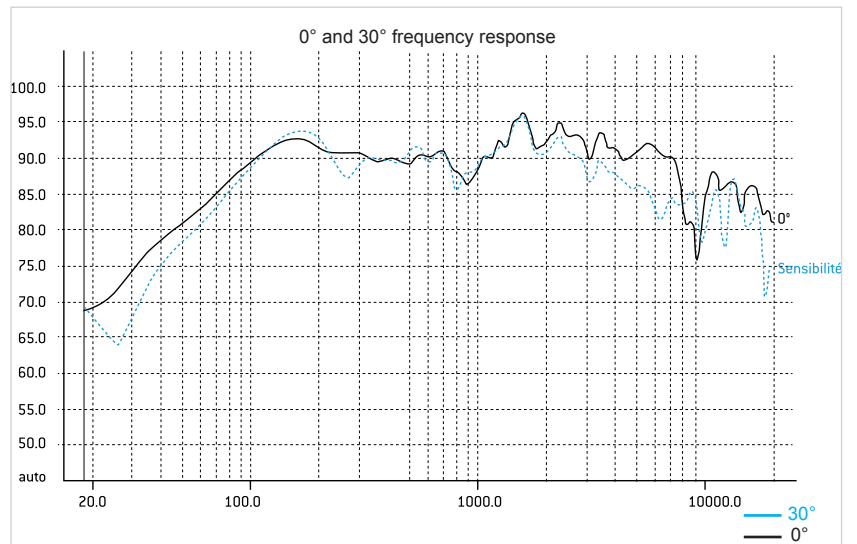

MECHANICAL DRAWING

