

HOME COLLECTION

2024



INTEGRATED BESPOKE SOLUTIONS
FOR INDOORS & OUTDOORS

For more than four decades, Focal has created speaker drivers and high-end loudspeakers that deliver a unique sound. Our brand values are innovation and performance; excellence and pleasure. We are globally renowned for our exclusive technologies. The result of this technological heritage is class-leading products offering a natural, authentic performance, imbued with clarity and power.

With our collection of custom integrated loudspeakers, we offer an outstanding listening quality with our varied, complementary and discreet solutions.



HOME CINEMA

KITCHEN




BATHROOM

OUTDOORS



LIVING ROOM

BEDROOM

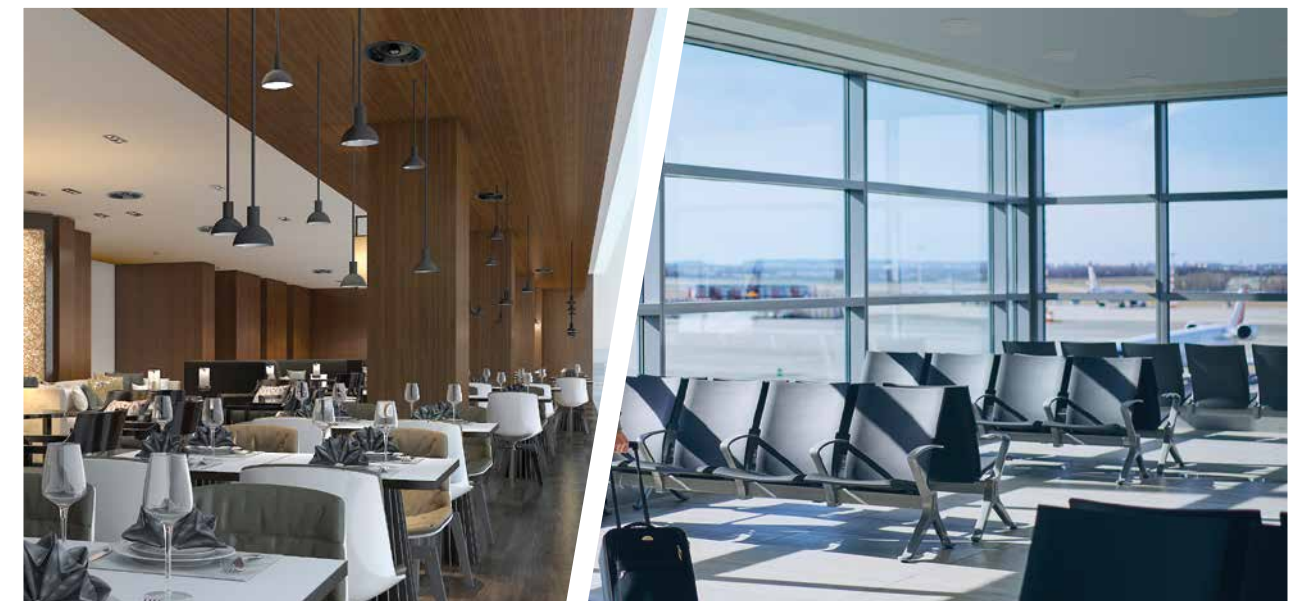

RESTAURANT

PUBLIC PLACES

GLOSSARY

RANGES

1000 SERIES

Exclusive 'W' technology and pure Beryllium tweeter

300 SERIES

Exclusive Flax technology and Aluminium/Magnesium tweeter

100 SERIES

Polyglass technology and Aluminium tweeter

LITTORA 1000

IP Fiber technology and Beryllium tweeter

LITTORA 200

IP Iris technology and Aluminium 'M' tweeter



APPLICATIONS

IC In-Ceiling
In-ceiling loudspeaker

IW In-Wall
In-wall loudspeaker

ICW In-Wall / In-Ceiling
In-wall and in-ceiling loudspeaker

IWLCR In-Wall Left Center Right
In-wall loudspeaker for left, right, center and surround channels

ICLCR In-Ceiling Left Center Right
In-ceiling loudspeaker for left, right, center and surround channels

ICA In-Ceiling Angled
In-ceiling angled loudspeaker for Dolby Atmos® effects

ST Stereo
In-wall and in-ceiling loudspeaker producing a stereo effect

OD Outdoor
IP-certified* outdoor loudspeaker

SAT Satellite
Discreet loudspeaker with multi-purpose fastenings

STONE Stone
Stone-effect outdoor loudspeaker

SUB Subwoofer
Integrated subwoofer

T 70 - 100 V transformer
To cover a very large listening area

SPEAKER DRIVER DIAMETER

- 4 4" or 10cm
- 5 5" or 13cm
- 6 6½" or 16.5cm
- 8 8" or 20cm
- 10 10" or 25cm
- 12 12" or 30cm



*IP codes are international standards used to identify the degrees of protection of products against the ingress of solid or liquid foreign objects. The first digit of the IP code represents the level of protection against the ingress of dust (0 to 6), the second represents the level of protection against water (0 to 8).



1000 SERIES






300 SERIES

100 SERIES

100-T SERIES

INDOOR				
 IN-CEILING	1000 ICLCR5 1000 ICA6 1000 ICW6	300 ICLCR5 300 ICW8 300 ICA6 300 ICW6 300 ICW4	100 ICLCR5 100 IC6ST 100 ICW8 100 ICW6 100 ICW5	100 ICW8-T 100 ICW6-T 100 ICW5-T
 ON-CEILING				
 IN-WALL		300 ICW8 300 ICW6 300 ICW4 300 IWLCR6 300 IW6	100 ICW8 100 ICW6 100 ICW5 100 IWLCR5 100 IW6 100 IWSUB8	100 ICW8-T 100 ICW6-T 100 ICW5-T
 ON-WALL	1000 IWLCR UTOPIA* 1000 IWSUB UTOPIA* 1000 IWLCR6* 1000 IW6*			

 ON FURNITURE				
-----------------------------------------------------------------------------------------------------	--	--	--	--

OUTDOOR				
 IN-CEILING				
 ON-CEILING		100 OD8 100 OD6	100 OD8-T 100 OD6-T	
 IN-WALL				
 ON-WALL		100 OD8 100 OD6	100 OD8-T 100 OD6-T	
 FLOOR				



LITTORA


ON WALL 300


DÔME FLAX

SIB EVO

MU-SO

1000 ICW8 1000 ICW10 1000 ICW SUB10 200 ICW6 200 ICW8				
		DÔME FLAX	SIB EVO	
1000 ICW8 1000 ICW10 1000 ICW SUB10 200 ICW6 200 ICW8				
	ON WALL 301 ON WALL 302	DÔME FLAX	SIB EVO SIB EVO DOLBY ATMOS®	
		DÔME FLAX	SIB EVO SIB EVO DOLBY ATMOS®	MU-SO MU-SO QB
1000 ICW8 1000 ICW10 1000 ICW SUB10 200 ICW6 200 ICW8				
OD SAT 5				
1000 ICW8 1000 ICW10 1000 ICW SUB10 200 ICW6 200 ICW8				
OD SAT 5				
OD SAT 5 OD STONE 8 OD SUB 12				

 Suitable for commercial use 70 - 100V

 Suitable for humid environments

* On-wall frames as optional extra



INDOOR SOLUTIONS

13



OUTDOOR SOLUTIONS

69



ELECTRONICS

89



COMMERCIAL SOLUTIONS

117

INDOOR SOLUTIONS

- 01. 1000 SERIES 15
- 02. 300 SERIES 23
- 03. 100 SERIES 29
- 04. ON WALL 300 37
- 05. DÔME FLAX 43
- 06. SIB EVO 49
- 07. SUBWOOFERS 57




01.

1000 SERIES

Unrivalled listening experiences

With seven exceptional products, the 1000 Series line promises unrivalled stereo and Home Cinema sound reproduction. These in-wall and in-ceiling loudspeakers are discreet, complementary, and can be adjusted and positioned for flawless sound spatialisation without compromise in your listening area. Both Utopia products enhance the line with their power and their design, specifically thought out to be assembled together.






'W'
sandwich cone



Pure Beryllium
tweeter



Ready-to-paint
grille



Positionable
speaker drivers



Bespoke
solution



Easy Quick
Install®





UTOPIA

The icon far ahead of the rest

The collection's iconic flagship product, the 1000 Series Utopia loudspeaker does a sensational job at picking up the smallest sound details in films. Thanks to its mid-high range plate in the d'Appolito configuration, and with different speaker driver settings, the installation can be fully customised. For the ultimate system, the 1000 Series Utopia subwoofer has been designed to combine perfectly with the loudspeaker and to offer exceptional bass.

HANDCRAFTED

 IN FRANCE



1000 IWLCR UTOPIA



1000 IWSUB UTOPIA

Type	3-way closed-back in-wall	Closed-back in-wall subwoofer	
Speaker drivers	<ul style="list-style-type: none"> • 4 x 6¹/₂" (16.5cm) 'W' Bass • 2 x 3¹/₈" (8cm) 'W' cone • 'M'-shaped Midranges • 1" (27mm) pure Beryllium inverted dome tweeter 	3 x 6 ¹ / ₂ " (16.5cm) Bass with 'W' cone	
Frequency response	45Hz - 40kHz	40Hz - 2.5kHz	
Sensitivity (2.83V/1m)	92dB	83dB	74dB
Nominal impedance	8Ω	8Ω	72Ω
Recommended amp power	100 - 750W (8Ω) 200 - 1,500W (4Ω)	100 - 750W (8Ω) 200 - 1,500W (4Ω)	300 - 4,000W (8Ω) 300 - 4,000W (4Ω)
Settings	Tweeter (-3dB, 0dB, +3dB) Midrange (-2dB, 0dB, +2dB) Bass (-2dB, 0dB, +2dB)	Impedance selector 8Ω - 72Ω	
Dimensions (HxWxD)	45 ³ / ₄ x 12 x 4" (116.2 x 30.5 x 10.1cm)	23 ³ / ₈ x 12 x 4" (59.3 x 30.5 x 10.1cm)	
Mounting dimensions (HxW)	44 ⁵ / ₈ x 10 ⁷ / ₈ " (113.4 x 27.6cm)	22 ¹ / ₄ x 10 ⁷ / ₈ " (56.4 x 27.6cm)	
Mounting depth	3 ⁷ / ₈ " (9.9cm)	3 ⁷ / ₈ " (9.9cm)	
Weight (with grille)	42.77lbs (19.4kg)	21.16lbs (9.6kg)	
Accessory (optional)	On-Wall frame	On-Wall frame	



1000 IWLCR6



1000 IW6

Type	3-way closed-back in-wall	2-way closed-back in-wall
Speaker drivers	<ul style="list-style-type: none"> • 7" (18cm) 'W' Passive radiator • 6 1/2" (16.5cm) 'W' Bass • 3" (8cm) 'W' Midrange • 1" (27mm) Pure Beryllium inverted dome tweeter 	<ul style="list-style-type: none"> • 6 1/2" (16.5cm) 'W' Mid-Bass • 1" (27mm) Pure Beryllium inverted dome tweeter
Frequency response	48Hz - 40kHz	55Hz - 40kHz
Sensitivity (2.83V/1m)	91dB	89dB
Nominal impedance	8Ω	8Ω
Recommended amp power	50 - 180W	25 - 150W
Settings	Tweeter (-3dB, 0dB, +3dB) Midrange (-3dB, 0dB, +3dB)	Tweeter (-3dB, 0dB, +3dB)
Dimensions (HxWxD ou ØxD)	29 3/4 x 12 x 4" (75.5 x 30.5 x 10.1cm)	17 1/8 x 12 x 4" (43.5 x 30.5 x 10.1cm)
Mounting dimensions (HxW ou Ø)	28 5/8 x 10 7/8" (72.6 x 27.6cm)	16 x 10 7/8" (40.6 x 27.6cm)
Mounting depth	3 7/8" (9.9cm)	3 7/8" (9.9cm)
Weight (with grille)	24.14lbs (10.95kg)	14.88lbs (6.75kg)
Accessory (optional)	On-wall frame	On-wall frame



1000 ICLCR5



1000 ICA6



1000 ICW6


Type	3-way bass-reflex in-ceiling	2-way coaxial in-ceiling	2-way coaxial in-wall/in-ceiling
Speaker drivers	<ul style="list-style-type: none"> • 2 x 5" (13cm) 'W' Bass • 4" (10cm) 'W' Midrange • 1" (25mm) Beryllium inverted dome tweeter 	<ul style="list-style-type: none"> • 6 1/2" (16.5cm) 'W' Mid-Bass • 1" (25mm) Pure Beryllium inverted dome tweeter 	<ul style="list-style-type: none"> • 6 1/2" (16.5cm) 'W' Mid-Bass • 1" (25mm) Pure Beryllium inverted dome tweeter
Frequency response	53Hz - 40kHz	55Hz - 40kHz	55Hz - 40kHz
Sensitivity	91dB	90.5dB	89dB
Nominal impedance	8Ω	8Ω	8Ω
Recommended amp power	25 - 240W	25 - 150W	25 - 150W
Settings	Tweeter (-3dB, 0dB, +3dB) Midrange (-3dB, 0dB, +3dB)	Tweeter (-3dB, 0dB, +3dB)	Tweeter (-3dB, 0dB, +3dB)
Dimensions (HxWxD ou ØxD)	14 5/8 x 14 5/8 x 7 5/8" (37 x 37 x 19.5mm)	11 3/4 x 5" (29.9 x 12.7cm)	9 5/8 x 4 1/8" (24.4 x 10.5cm)
Mounting dimensions (HxW ou Ø)	13 3/8 x 13 3/8" (34 x 34cm)	10 3/8" (26.4cm)	8 1/2" (21.6cm)
Mounting depth	7 1/2" (19cm)	5 3/4" (14.6cm)	4" (10cm)
Weight (with grille)	18.30lbs (8.3kg)	6.61lbs (3kg)	5.29lbs (2.4kg)
Accessory (optional)	-	-	-

02.

300 SERIES

A source of inspiration...

Bring a whole new vibe to your spaces with the 300 Series and its natural flax cone speaker drivers. In addition to the acoustic qualities and sound clarity they offer, the products are innovatively designed and quick to fit, thanks to the Easy Quick Install® (EQI) system. Whether for stereo or Home Cinema use, or as a complement to a traditional hi-fi system, all you have to do is make your choice and enjoy.

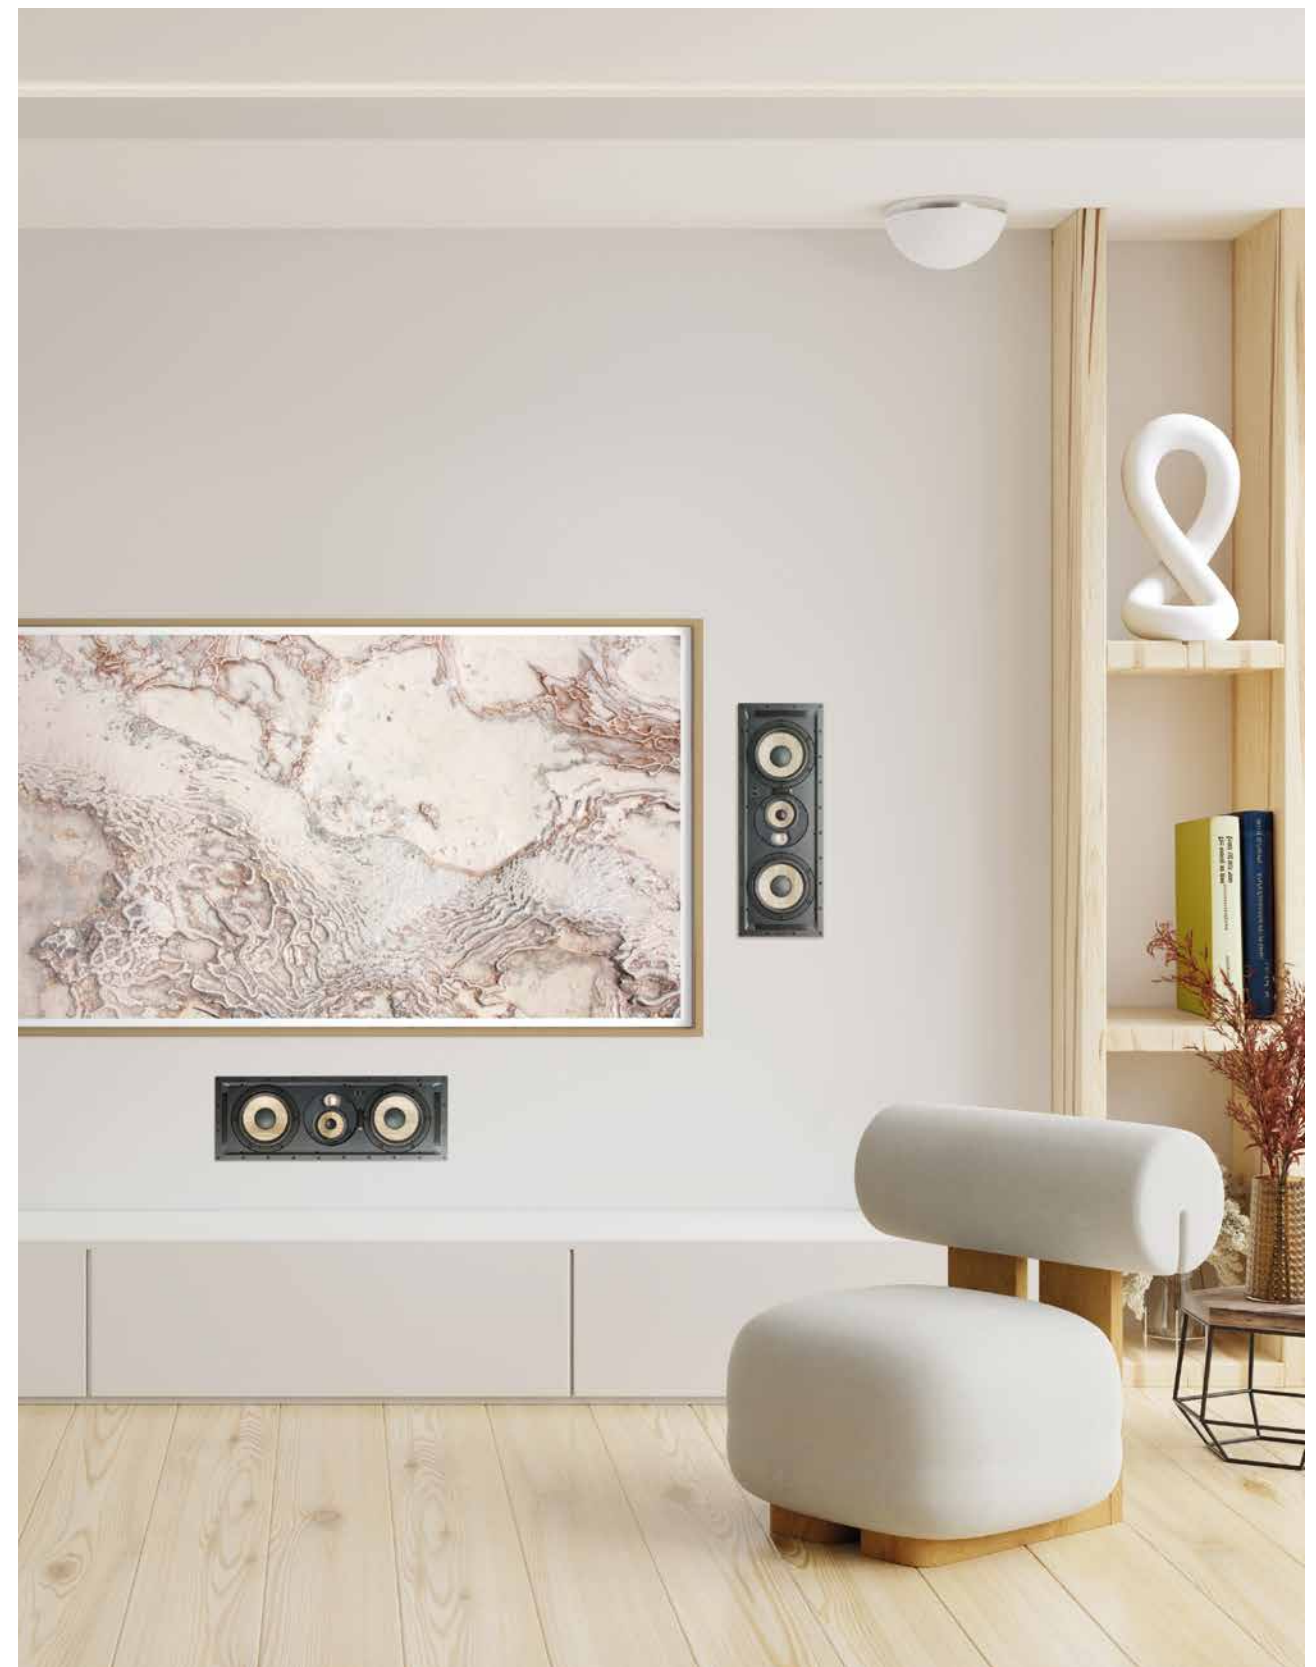




Flax cone



Al/Mg tweeter



Ready-to-paint grille




Positionable plate



Tweeter and midrange settings



Easy Quick Install®

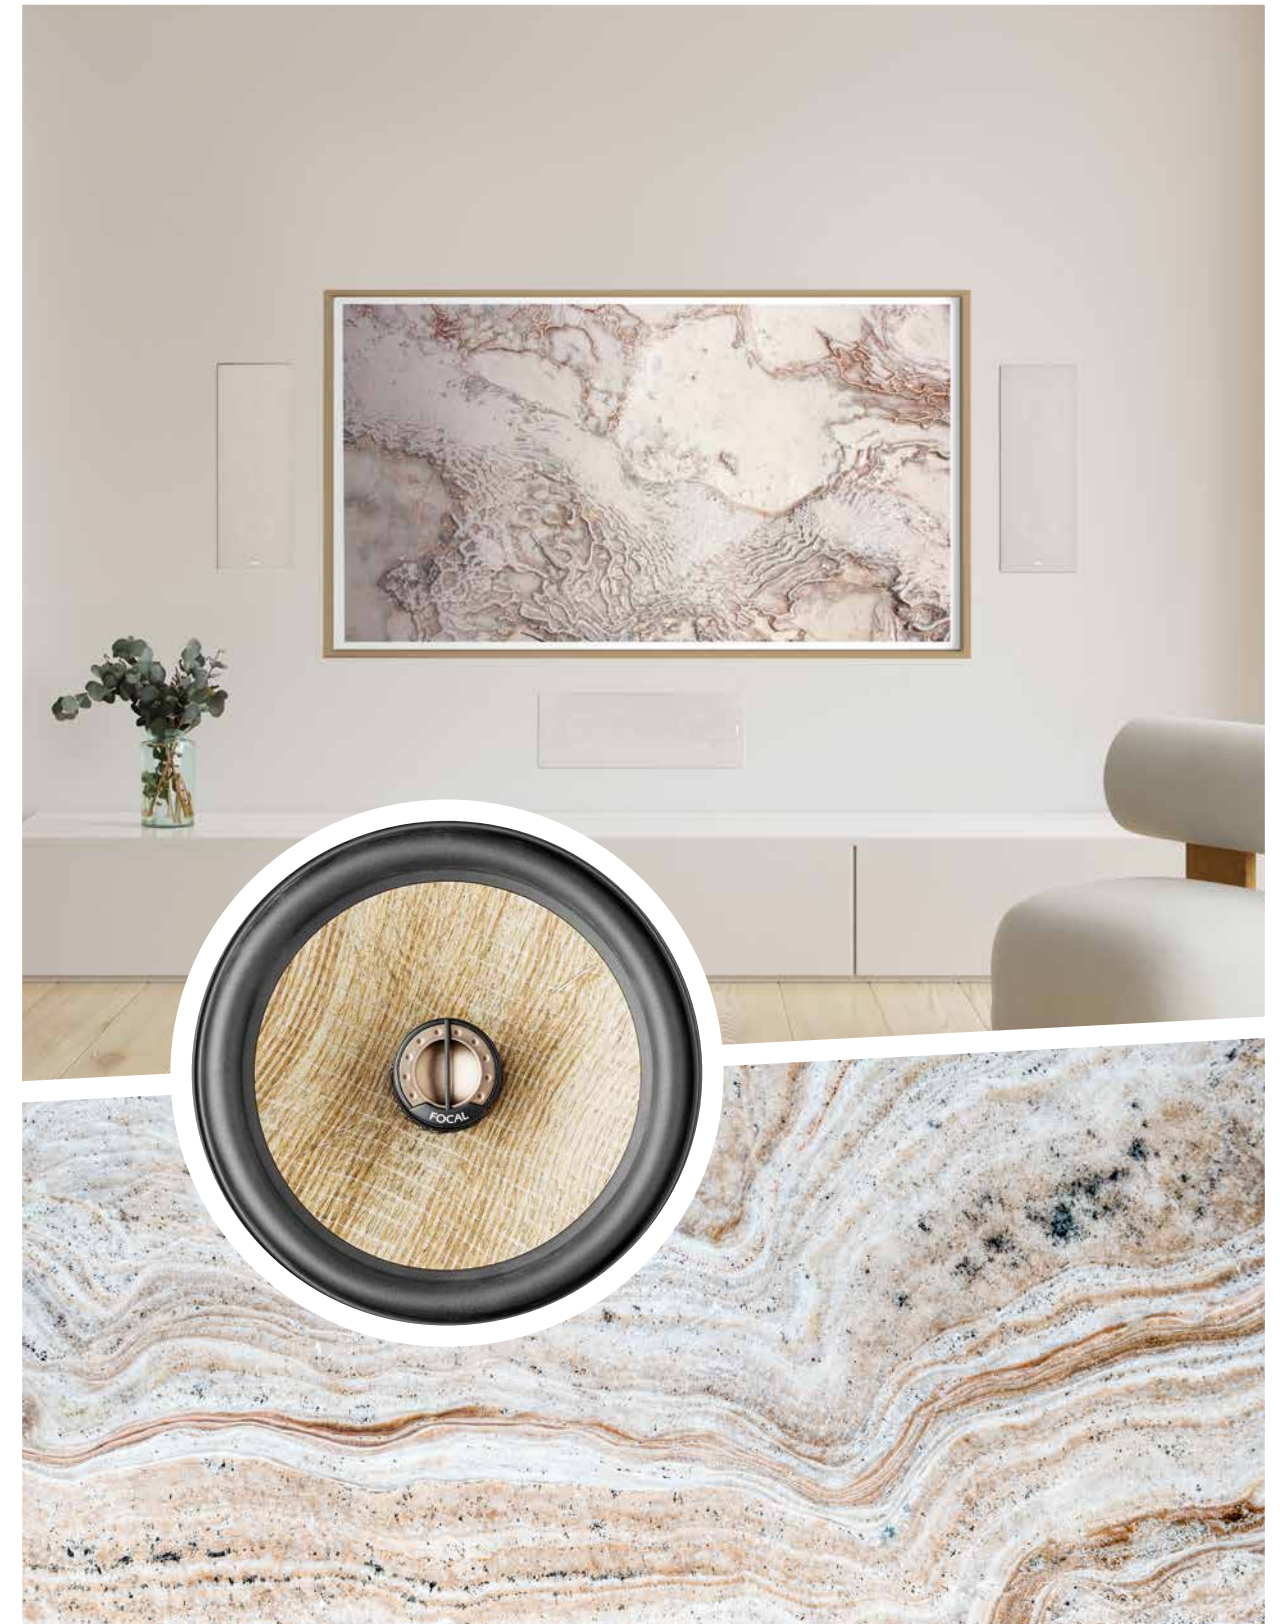



300 IWLCR6



300 IW6



300 ICLCR5

Type	3-way in-wall	2-way in-wall	3-way bass-reflex in-ceiling
Speaker drivers	<ul style="list-style-type: none"> • 2 x 6¹/₂" (16.5cm) Woofers • 4" (10cm) Flax Midrange • 1" (25mm) Al/Mg inverted dome tweeter 	<ul style="list-style-type: none"> • 6¹/₂" (16.5cm) Flax cone Mid-Bass • 1" (25mm) Al/Mg inverted dome tweeter 	<ul style="list-style-type: none"> • 2 x 5" (13cm) Flax woofers • 4" (10cm) Flax Midrange • 1" (25mm) Al/Mg inverted dome tweeter
Frequency response	40Hz - 28kHz	55Hz - 28kHz	55Hz - 28kHz
Sensitivity (2.83V/1m)	92dB	90dB	91dB
Nominal impedance	8Ω	8Ω	8Ω
Recommended amp power	50 - 150W	25 - 130W	50 - 150W
Settings	Tweeter (-3dB, 0dB, +3dB) Midrange (-3dB, 0dB, +3dB)	Tweeter (-3dB, 0dB, +3dB) Midrange (-3dB, 0dB, +3dB)	Tweeter (-3dB, 0dB, +3dB) Midrange (-3dB, 0dB, +3dB)
Dimensions (HxWxD or ØxD)	23 ⁵ / ₈ x 8 ¹ / ₁₆ x 3 ⁷ / ₈ " (60 x 22 x 9.8cm)	12 ³ / ₄ x 8 ¹ / ₁₆ x 3 ⁷ / ₈ " (32.3 x 22 x 9.8cm)	14 ⁹ / ₁₆ x 14 ⁹ / ₁₆ x 7 ¹ / ₁₆ " (37 x 37 x 19.5cm)
Mounting dimensions (HxW ou Ø)	22 ³ / ₈ x 7 ¹ / ₂ " (56.8 x 19.1cm)	11 ¹ / ₂ x 7 ¹ / ₂ " (29.2 x 19.1cm)	13 ³ / ₈ " x 13 ³ / ₈ " (34 x 34cm)
Mounting depth	3 ⁵ / ₈ " (9.3cm)	3 ⁵ / ₈ " (9.3cm)	7 ¹ / ₂ " (19cm)
Weight	12.4lbs (5.65kg)	4.9lbs (2.25kg)	16.3lbs (7.4kg)



300 ICA6



300 ICW8



300 ICW6



300 ICW4

Type	2-way coaxial in-ceiling	2-way coaxial in-wall/in-ceiling	2-way coaxial in-wall/in-ceiling	2-way in-wall/in-ceiling
Speaker drivers	<ul style="list-style-type: none"> • 6¹/₂" (16.5cm) Flax Mid-Bass • 1" (25mm) Al/Mg inverted dome tweeter 	<ul style="list-style-type: none"> • 8" (21cm) Flax Mid-Bass • 1" (25mm) Al/Mg inverted dome tweeter 	<ul style="list-style-type: none"> • 6¹/₂" (16.5cm) Flax Mid-Bass • 1" (25mm) Al/Mg inverted dome tweeter 	<ul style="list-style-type: none"> • 4" (10cm) Flax Mid-Bass • 1" (25mm) Al/Mg inverted dome tweeter
Frequency response	65Hz - 28kHz	48Hz - 28kHz	65Hz - 28kHz	80Hz - 28kHz
Sensitivity	89.5 dB	90dB	89dB	88dB
Nominal impedance	8Ω	8Ω	8Ω	8Ω
Recommended amp power	25 - 130W	25 - 150W	25 - 130W	25 - 100W
Settings	Tweeter (-3dB, 0dB, +3dB)	Tweeter (-3dB, 0dB, +3dB)	Tweeter (-3dB, 0dB, +3dB)	Tweeter (-3dB, 0dB, +3dB)
Dimensions (HxWxD or ØxD)	11 ³ / ₄ x 5" (29.9 x 12.7cm)	11 ³ / ₄ x 5" (29.9 x 12.7cm)	9 ⁵ / ₈ x 4 ¹ / ₈ " (24.4 x 10.5cm)	7 ⁹ / ₁₆ x 3 ⁷ / ₈ " (19.2 x 9.8cm)
Mounting dimensions	10 ³ / ₈ " (26.4cm)	10 ³ / ₈ " (26.4cm)	8 ¹ / ₂ " (21.6cm)	6 ³ / ₈ " (16.3cm)
Mounting depth	5 ³ / ₄ " (14.6cm)	4 ³ / ₄ " (12.2cm)	4 (10cm)	3 ⁵ / ₈ " (9.3cm)
Weight	6.6lbs (3kg)	7.05lbs (3.2kg)	5.29lbs (2.4kg)	2.6lbs (1.3kg)

03.

100 SERIES


Discreet musicality

A comprehensive solution for your home audio needs, indoors and outdoors, the 100 Series offers outstanding performance from a compact design. The range is ideal for small-to-medium-sized rooms, for seamless sound throughout the house, stereo listening or Home Cinema installations. The tropicalised Polyglass cone is even suited for bathroom use, too.






Polyglass
cone



Aluminium
tweeter



Ready-to-paint
grille



Positionable
tweeter



Tropicalised
cone



Compact design
unibody chassis





	100 IWLCR5	100 IW6	100 ICLCR5
Type	2-way in-wall D'Appolito	2-way in-wall	2-way in-ceiling
Speaker drivers	<ul style="list-style-type: none"> • 2 x 5" (13cm) Polyglass Mid-Bass • 1" (25mm) Aluminium inverted dome tweeter 	<ul style="list-style-type: none"> • 6¹/₂" (16,5cm) Polyglass Mid-Bass • 1" (25mm) Aluminium inverted dome tweeter 	<ul style="list-style-type: none"> • 2 x 5" (13cm) Polyglass Mid-Bass • 1" (25mm) Aluminium inverted dome tweeter • 8" (21cm) Polyglass Passive radiator
Frequency response	55Hz - 23kHz	60Hz - 23kHz	65Hz - 23kHz
Sensitivity (2.83V/1m)	90.5dB	89dB	92dB
Nominal impedance	8Ω	8Ω	8 Ω
Recommended amp power	25 - 120W	25 - 120W	25 - 120W
Settings	Tweeter (-3dB, 0dB, +3dB) Midrange (-3dB, 0dB, +3dB)	Tweeter (-3dB, 0dB, +3dB) Midrange (-3dB, 0dB, +3dB)	Tweeter (-3dB, 0dB, +3dB)
Dimensions (HxWxD ou ØxD)	17 ³ / ₈ x 6 ³ / ₄ x 3 ³ / ₈ " (44 x 17.3 x 8.6cm)	11 ³ / ₄ x 7 ⁵ / ₈ x 3 ⁵ / ₈ " (29.8 x 19.5 x 9.2cm)	14 x 14 x 5 ⁵ / ₁₆ " (35.4 x 35.4 x 15cm)
Mounting dimensions (HxW ou Ø)	16 ³ / ₈ " x 5 ³ / ₄ " (41.5 x 14.7cm)	10 ³ / ₄ x 6 ³ / ₄ " (27.3 x 17cm)	12 ⁷ / ₈ x 12 ⁷ / ₈ " (32.8 x 32.8cm)
Mounting depth	3 ¹ / ₄ " (8.3cm)	3 ¹ / ₂ " (8.8cm)	6" (15.2cm)
Weight	3.89lbs (2.9kg)	4.1lbs (1.85kg)	11.6lbs (5.3kg)



	100 IC6ST	100 ICW8	100 ICW6	100 ICW5
Type	2-way stereo coaxial in-ceiling	2-way coaxial in-wall/in-ceiling	2-way coaxial in-wall/in-ceiling	2-way coaxial in-wall/in-ceiling
Speaker drivers	<ul style="list-style-type: none"> • 6¹/₂" (16,5cm) Dual voice coil Polyglass Mid-Bass • 2 x 1" (25mm) Aluminium inverted dome tweeter 	<ul style="list-style-type: none"> • 8" (21cm) Polyglass Mid-Bass • 1" (25mm) Aluminium inverted dome tweeter 	<ul style="list-style-type: none"> • 6¹/₂" (16.5cm) Polyglass Mid-Bass • 1" (25mm) Aluminium inverted dome tweeter 	<ul style="list-style-type: none"> • 5" (13cm) Polyglass Mid-Bass • 1" (25mm) Aluminium inverted dome tweeter
Frequency response	60Hz - 23kHz	53Hz - 23kHz	62Hz - 23kHz	65Hz - 23kHz
Sensitivity	89dB	90dB	89dB	88dB
Nominal impedance	8Ω	8Ω	8Ω	8Ω
Recommended amp power	25 - 100W	25 - 150W	25 - 100W	15 - 100W
Settings	Tweeter (-3dB, 0dB, +3dB)	Tweeter (-3dB, 0dB, +3dB)	Tweeter (-3dB, 0dB, +3dB)	Tweeter (-3dB, 0dB, +3dB)
Dimensions (HxWxD ou ØxD)	8 ³ / ₁₆ x 3 ³ / ₄ " (20.8 x 9.5cm)	9 ³ / ₄ x 4 ³ / ₈ " (24.8 x 11.1cm)	8 ³ / ₁₆ x 3 ³ / ₄ " (20.8 x 9.5cm)	7 ¹ / ₄ x 3 ⁷ / ₁₆ " (18.4 x 8.7cm)
Mounting dimensions (HxW ou Ø)	7 ¹ / ₄ " (18.4cm)	8 ¹ / ₁₆ " (22.4cm)	7 ¹ / ₄ " (18.4cm)	6 ⁵ / ₁₆ " (16cm)
Mounting depth	3 ⁵ / ₈ " (9.1cm)	4 ¹ / ₄ " (10.7mm)	3 ³ / ₄ " (9.1cm)	3 ¹ / ₄ " (8.2cm)
Weight	3.86lbs (1.75kg)	3.86lbs (1.75kg)	3.3lbs (1.5kg)	3.19lbs (1.45kg)




100 IWSUB8

Type	Passive subwoofer
Speaker drivers	8" (21cm) Polyglass Woofer
Frequency response	34 - 140Hz
Sensitivity (2.83V/1m)	89dB
Nominal impedance	8Ω
Recommended amp power	Max 200W / 4Ω
Dimensions (WxDxH)	13 ⁷ / ₈ x 3 ⁷ / ₈ x 5 ¹³ / ₁₆ " (130 x 9.8 x 35.2cm)
Mounting dimensions (WxH)	13 ⁷ / ₈ x 5 ¹³ / ₁₆ " (130 x 35.2cm)
Mounting depth	3 ³ / ₈ " (8.6cm)
Weight	32.3lbs (14.6kg)



100 IWSUB8 AMPLIFIER

Type	Subwoofer amplifier
Power (continuous)	Max 200W, 150W continuous 4Ω
Minimum load	4Ω
Voltage range	100 - 120V / 60Hz 220 - 230V / 50Hz
Power consumption	150W
Stand-by power consumption	0.5W
Frequency response	20 - 250Hz
Subsonic filter	18dB / oct.
Inputs	LFE, Line in L/R
Outputs	Line out L/R and subwoofer out binding post
Cord	Detachable IEC power cord
Protection	Dynamic power control, thermal protection, short circuit, fuse and over-current protection
Dimensions (HxWxD)	1.8" (2" with feet) x 16.9" (19" with rack brackets) x 10.1"
Weight	6.8lbs (3.1kg)

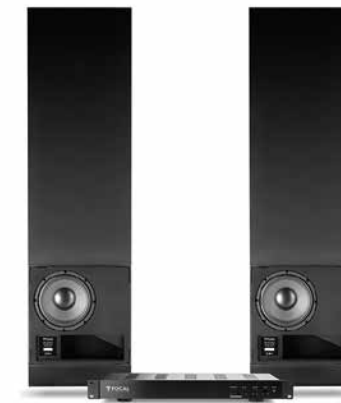

PACK 2 x 100 IWSUB8 & 100 IWSUB8 AMPLIFIER




PACK 100 IWSUB8 & 100 IWSUB8 AMPLIFIER


04.

ON WALL 300

Creating emotion

Designed for stereo and Home Cinema use, the allure of the On Wall 300 loudspeakers lies in their sleek design, 'angled' silhouette and incredible sound. Their speaker drivers boast a natural Flax cone to bring realism, vocal clarity and sonic detail into your home. Available in a White High Gloss or Black Satin finish, On Wall 300 blends seamlessly into interiors, around a television.

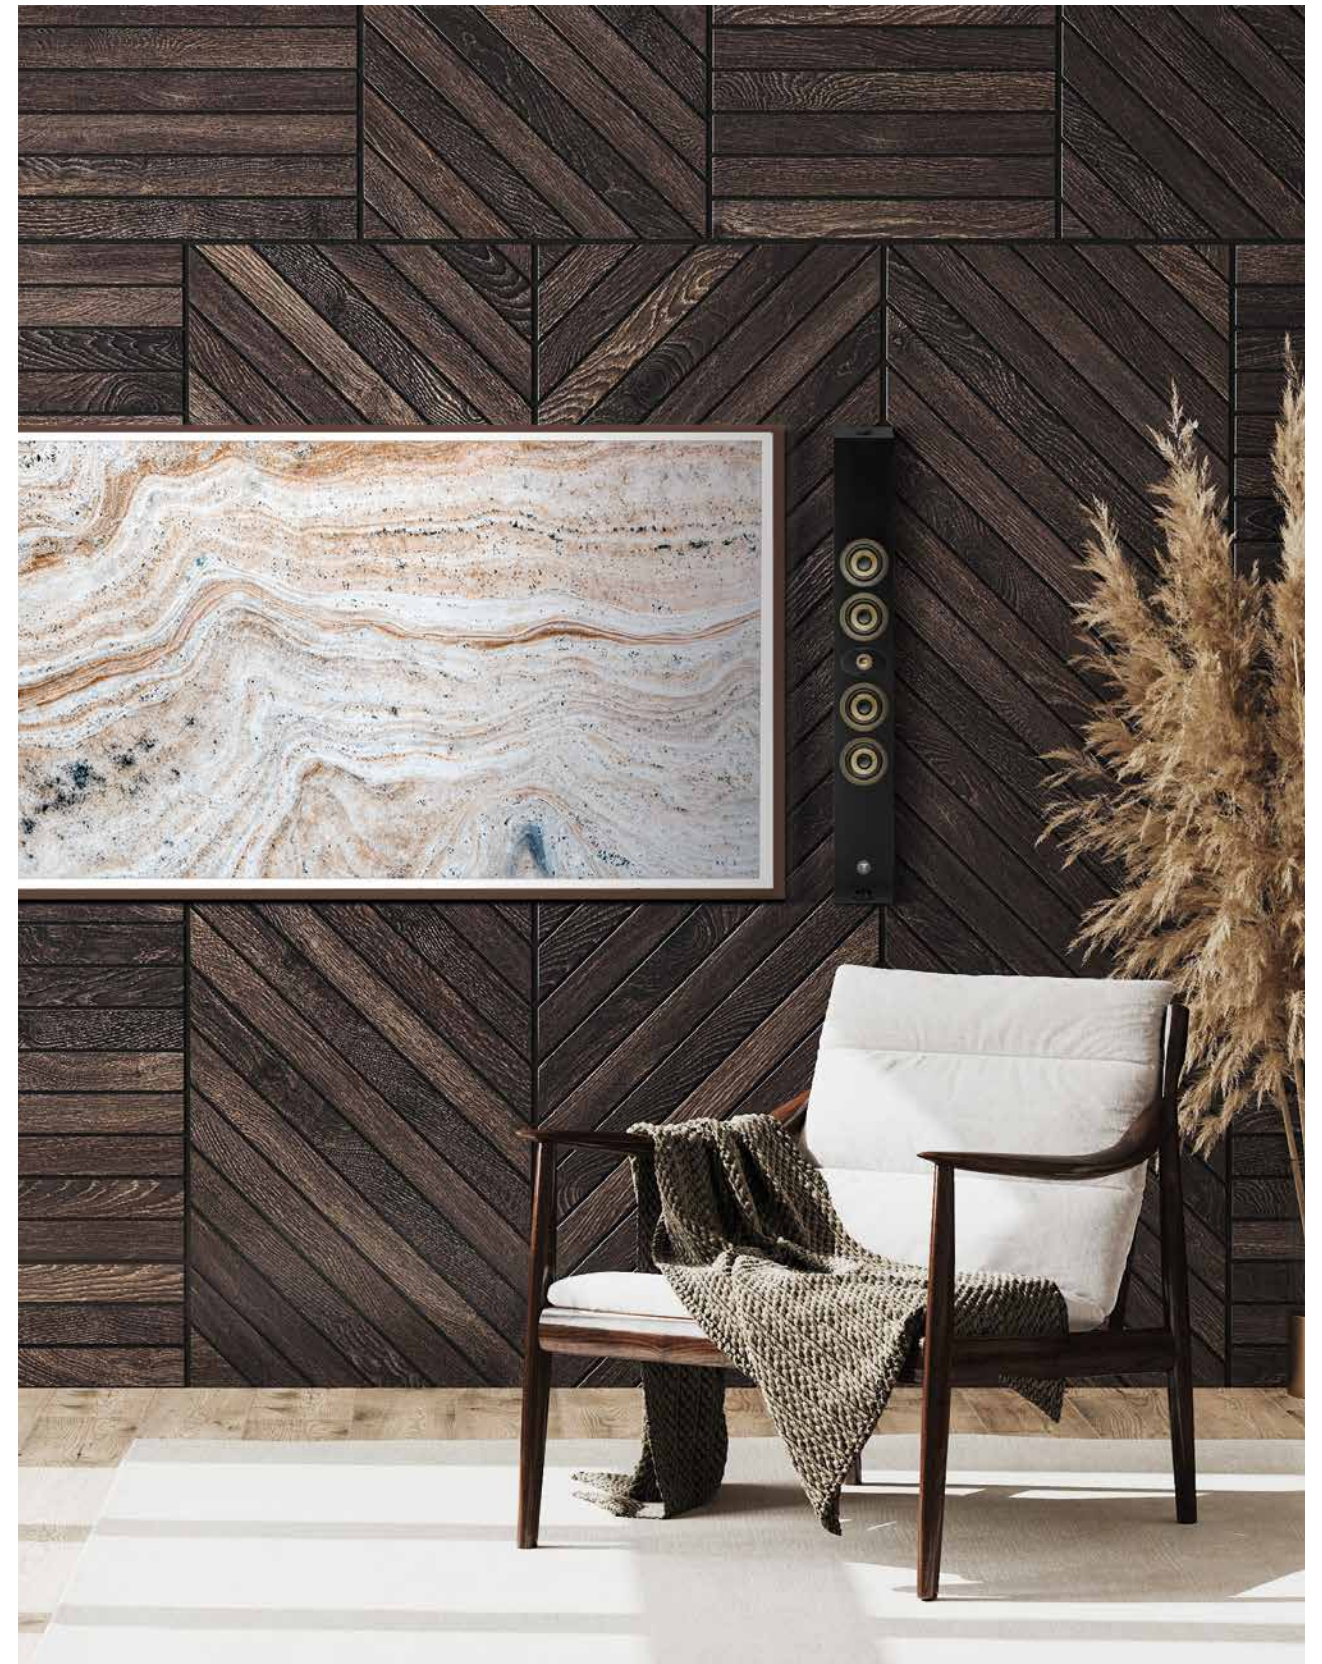



Flax cone




Al/Mg tweeter



Magnetic grille




Side ports



Black Satin finish



White High Gloss finish

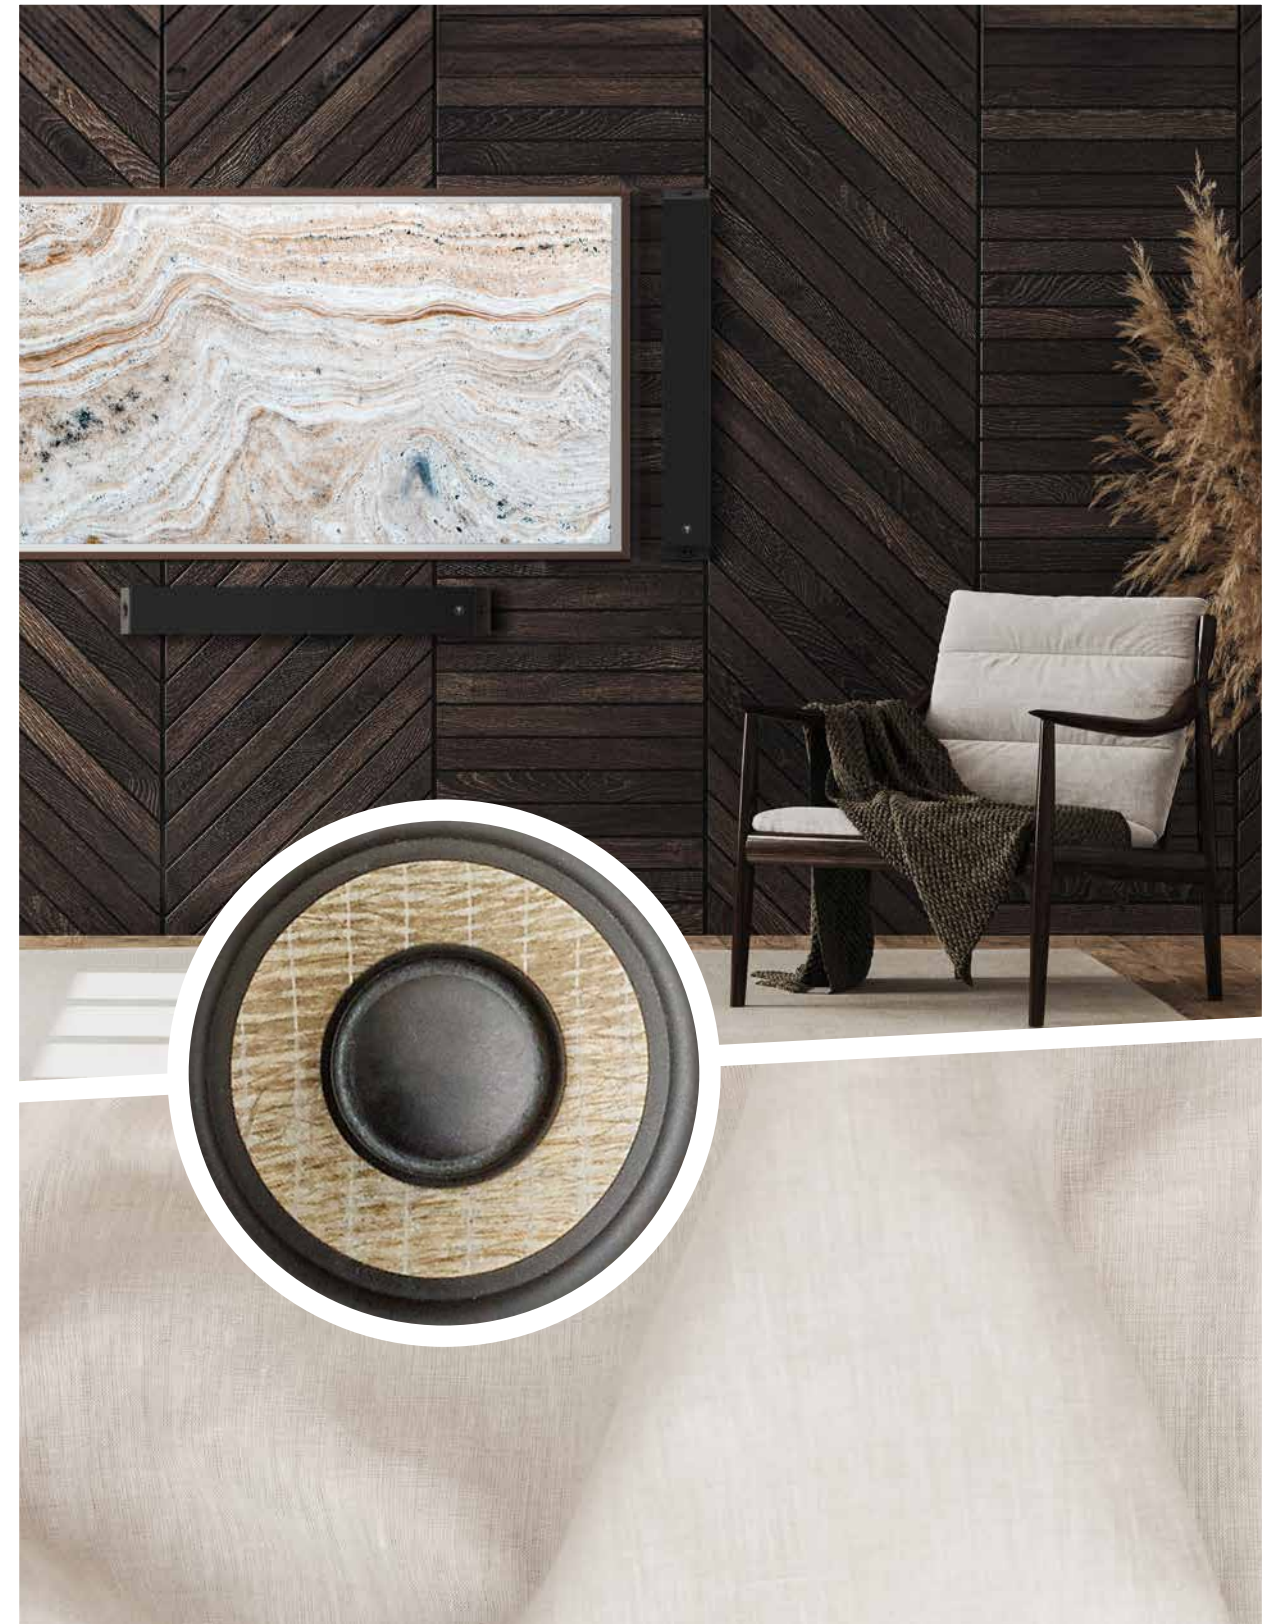



ON WALL 301

Type	2-way bass-reflex loudspeaker	Type	2.5-way bass-reflex loudspeaker
Speaker drivers	<ul style="list-style-type: none"> • 2 x 4" (10cm) Flax Mid-Bass • 1 x 1" (25mm) Tweeter TNF 	Speaker drivers	<ul style="list-style-type: none"> • 4 x 4" (10cm) Flax Mid-Bass • 1 x 1" (25mm) Tweeter TNF
Frequency response	53Hz - 28kHz	Frequency response	50Hz - 28kHz
Crossover frequency	2,500Hz	Crossover frequency	1,100Hz - 2,500Hz
Sensitivity (2.83V/1m)	87dB	Sensitivity (2.83V/1m)	91dB
Nominal impedance	8Ω	Nominal impedance	8Ω
Recommended amp power	25 - 130W	Recommended amp power	40 - 180W
Dimensions (HxWxD)	31 ¹ / ₂ x 6 ¹ / ₈ x 3 ⁹ / ₁₆ " (80 x 15.5 x 9cm)	Dimensions (HxWxD)	49 ³ / ₁₆ x 6 ¹ / ₈ x 3 ⁹ / ₁₆ " (125 x 15.5 x 9cm)
Finishes	 	Finishes	 
Weight	13lbs (5.9kg)	Weight	20.72lbs (9.4kg)



ON WALL 302



Stands sold separately by pair.


ON WALL 300 STAND


05.

DÔME FLAX

The sound spotlight

Made in France, Dôme is a line of miniature loudspeakers boasting a Flax sandwich cone, exclusive to Focal. This technology provides genuine benefits in terms of sound definition and precision. In terms of appearance, the Dôme design blends fine materials and elegant finishes. The loudspeakers are positionable and easily integrated into the wall, ceiling or on a stand, as you prefer.

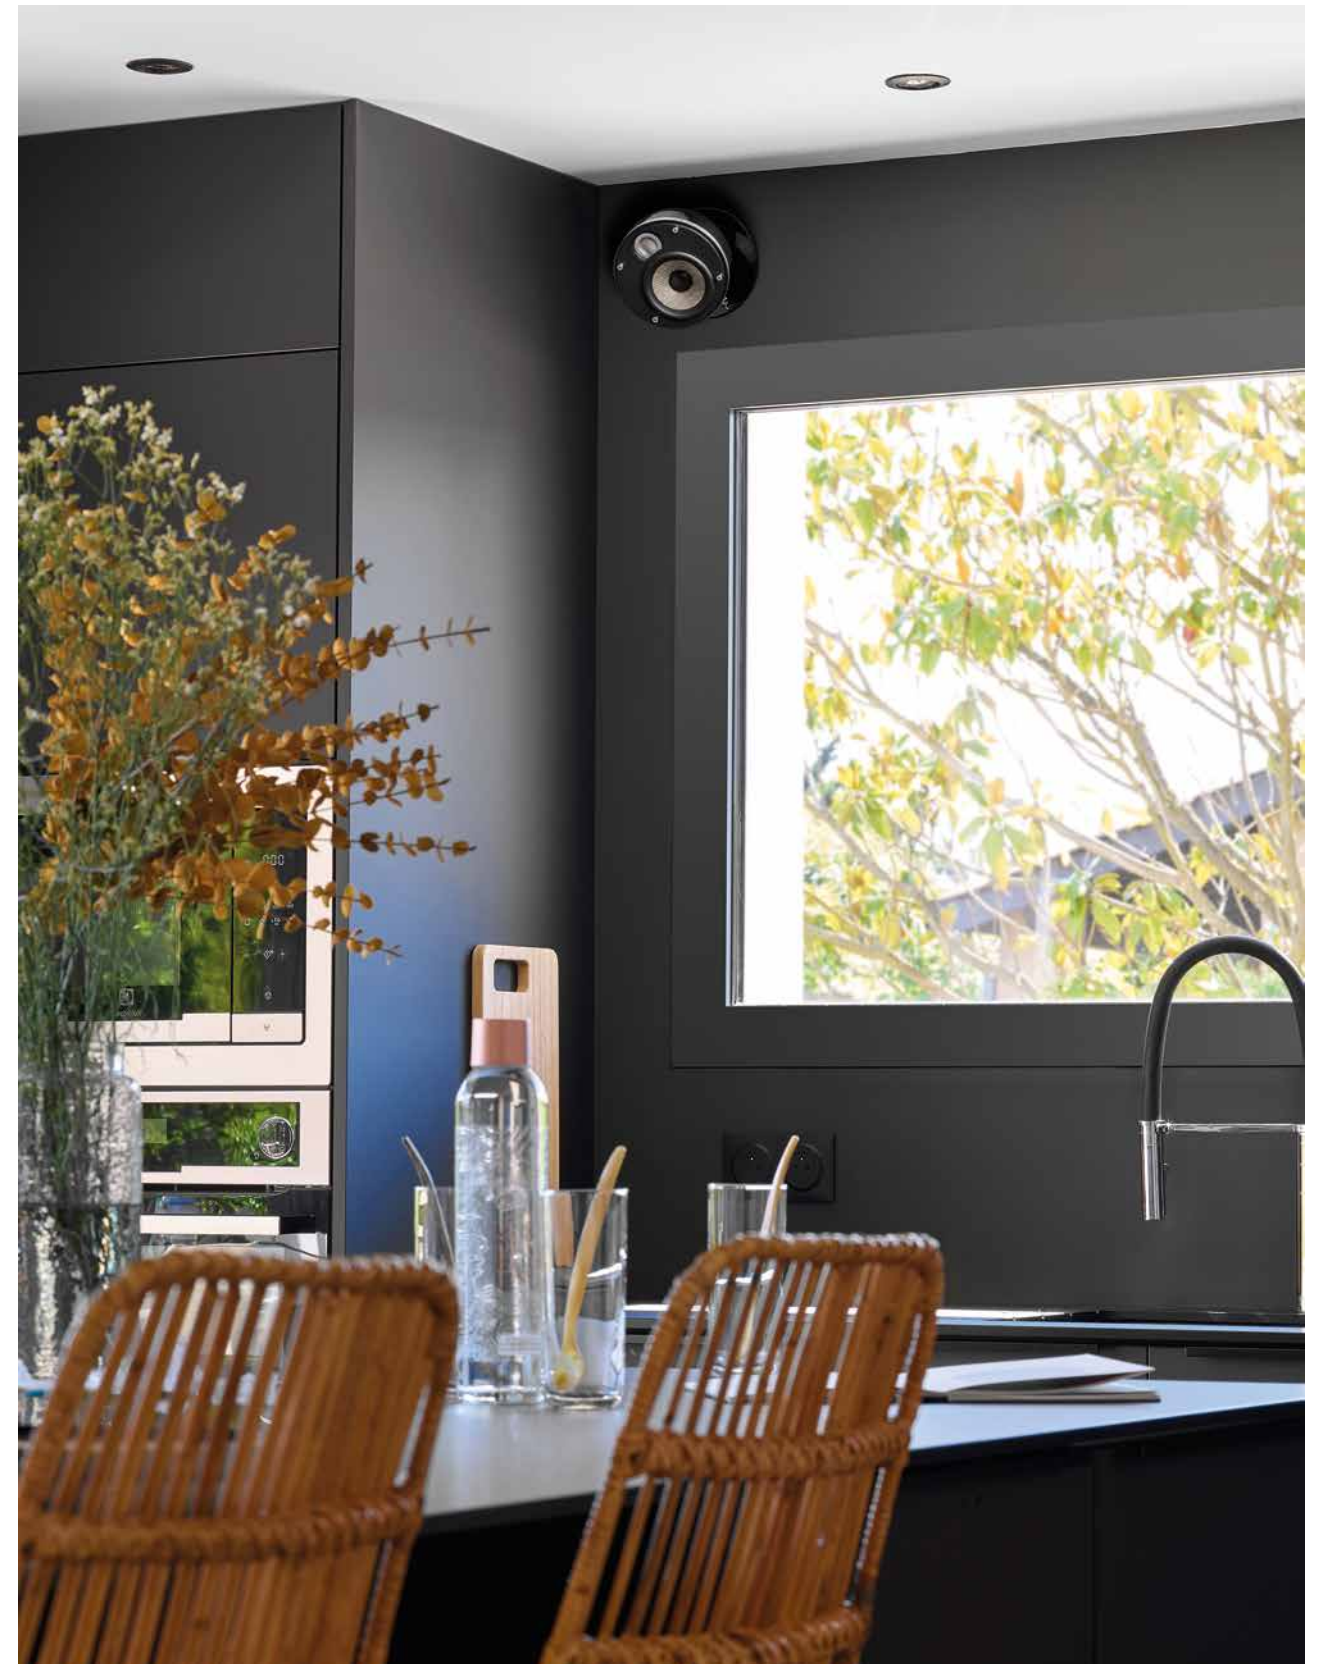



Flax cone




Al/Mg tweeter




Optional stand




On-wall or on-ceiling mounting



White High Gloss finish



Black High Gloss finish

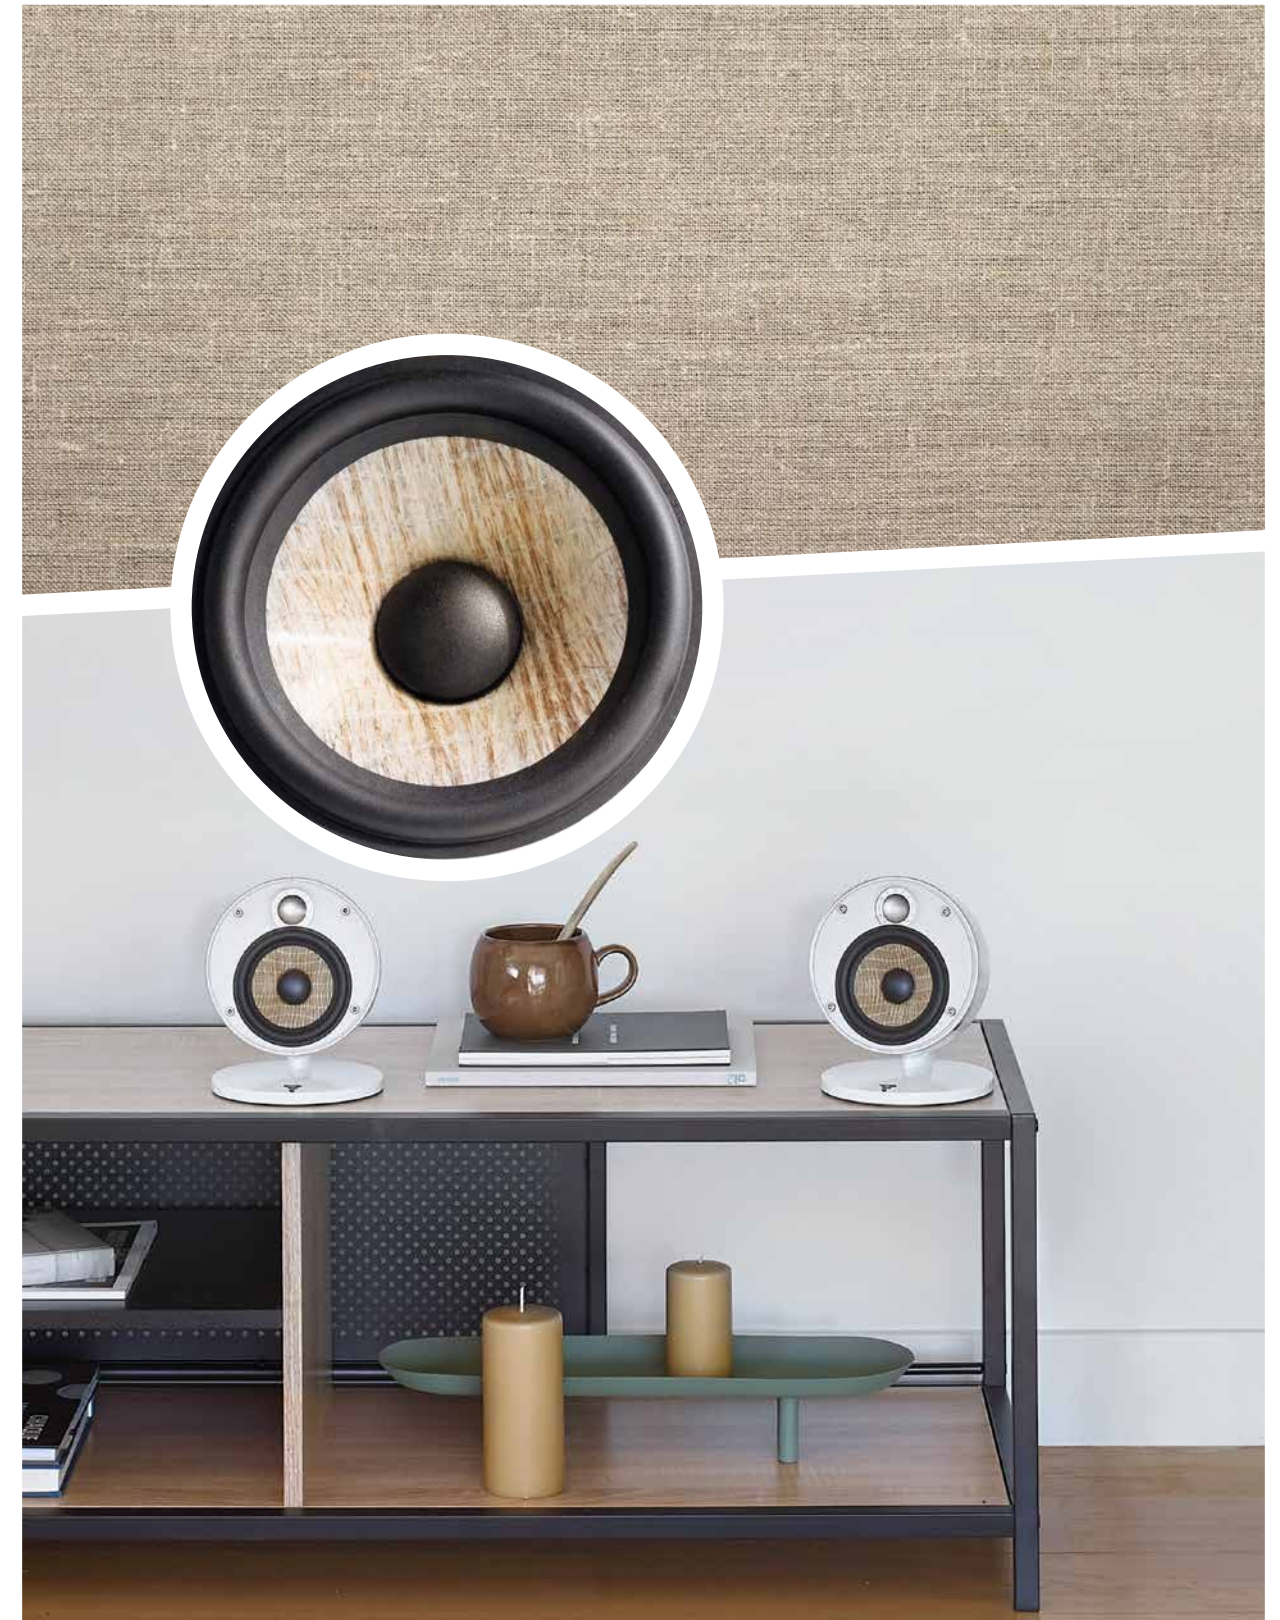



DÔME FLAX

Type	2-way compact sealed speaker
Speaker drivers	<ul style="list-style-type: none"> • 4" (10cm) Flax Mid-Bass • 1" (25mm) Al/Mg inverted dome tweeter
Frequency response	80Hz - 28kHz
Sensitivity (2.83V/1m)	88dB
Nominal impedance	8Ω
Recommended amp power	25 - 100W
Dimensions (HxWxD)	6 ³ / ₄ x 5 ¹¹ / ₁₆ x 5 ⁵ / ₈ " (17.2 x 14.4 x 14.3cm)
Finishes	● ○
Weight	4.19lbs (1.9kg)



PACK DÔME FLAX 5.1

5 x Dôme Flax
1 x Sub Air



Stands sold separately by pair.

DÔME STAND




06.

SIB EVO

At the heart of the action

The line comprises one traditional loudspeaker, the Sib Evo, a second Sib Evo Dolby Atmos® model equipped with a specific speaker driver on top, and an active subwoofer, the Cub Evo. These satellite loudspeakers combine front and vertical diffusion thanks to the Dolby Atmos® effects created. The sound waves are projected onto the ceiling and are then reflected back to the listener for an immersive experience.

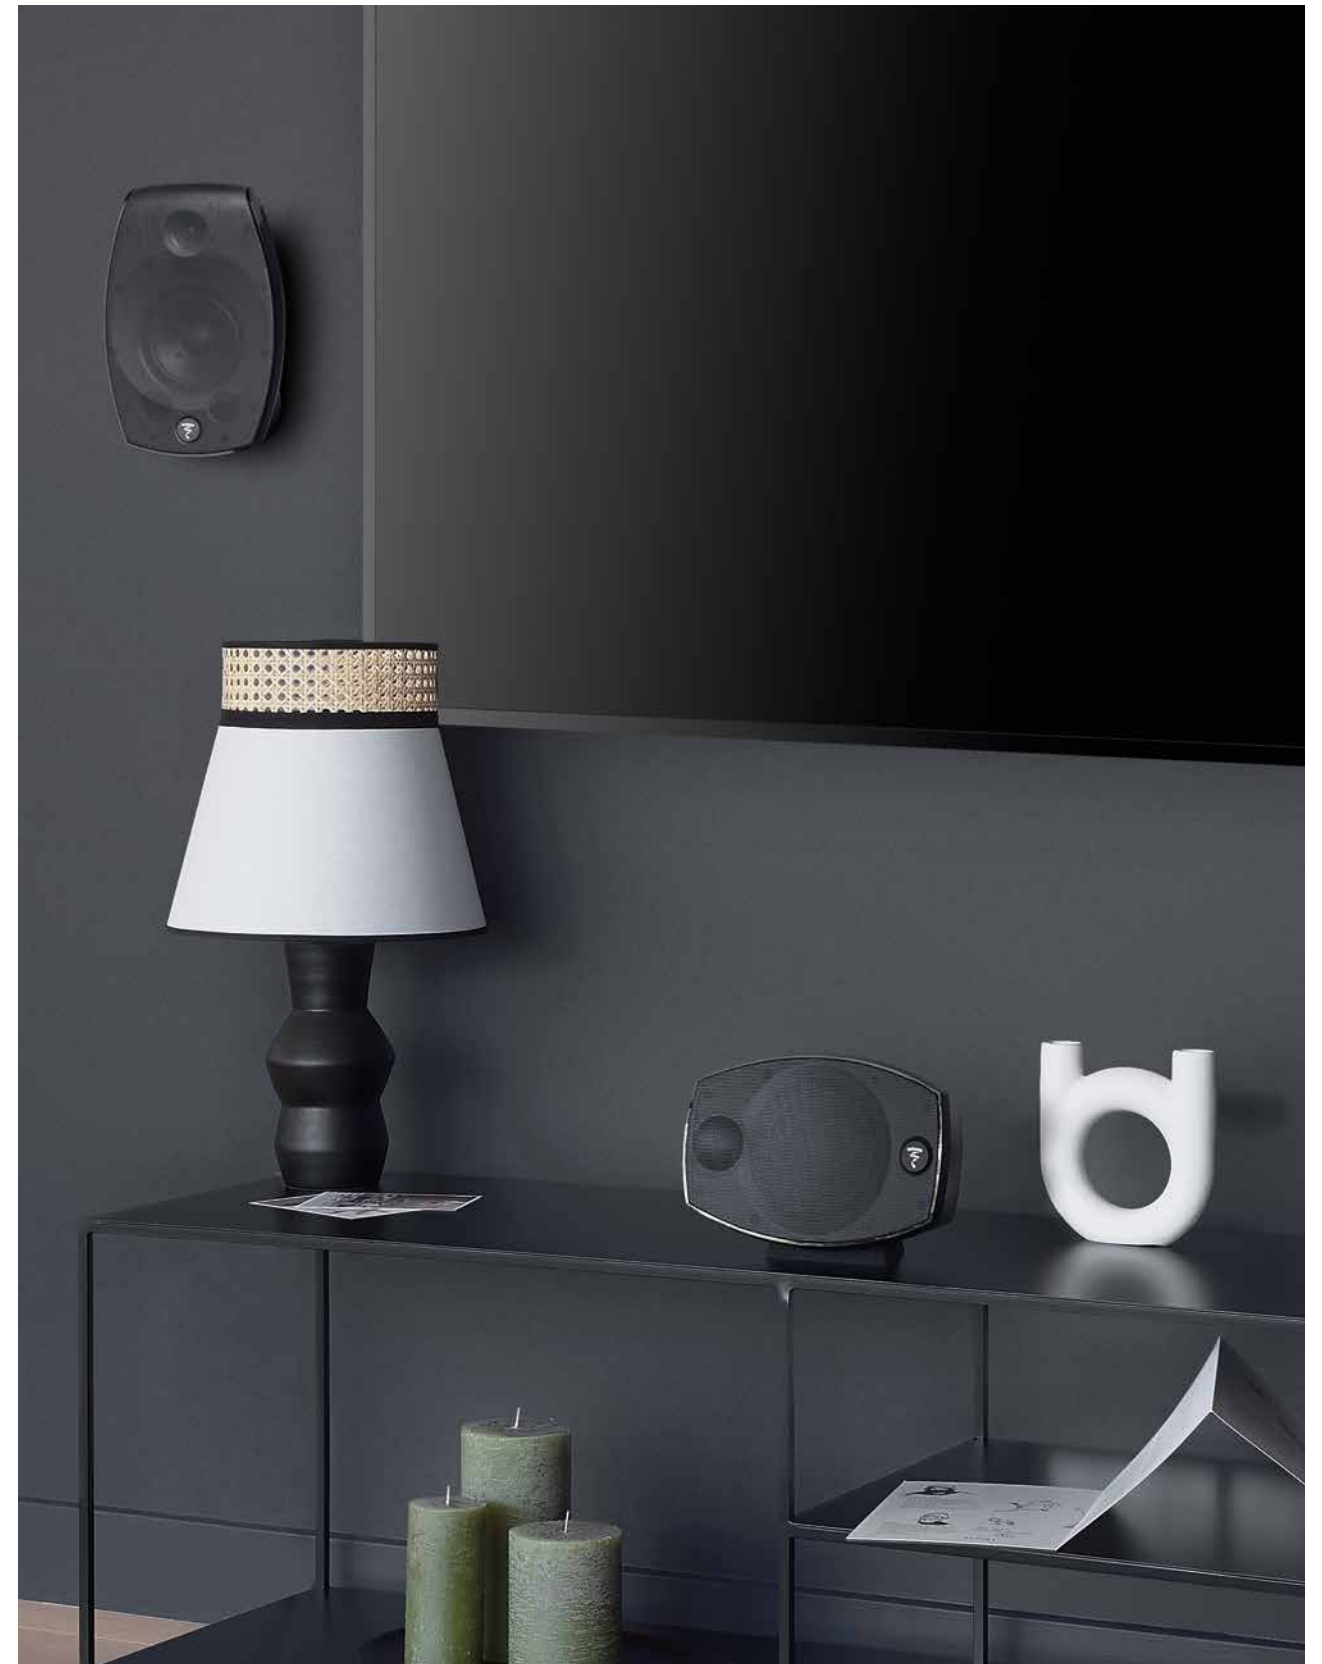



Polyflex
speaker driver



Dolby Atmos®
effects




Optional
stands



Compact
loudspeaker




Optional wall
attachment




Black
finish



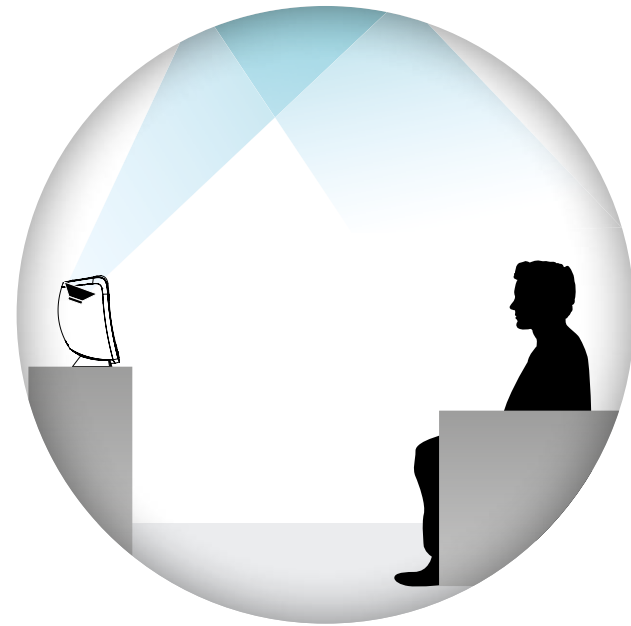

Dolby Atmos

Dolby Atmos® technology offers a cinema experience by creating powerful sound effects. You will find yourself at the heart of the action, music and dialogue of the films you watch, plunged into a 3D space of captivating realism. The Sib Evo loudspeakers equipped with Dolby Atmos® technology are called *enabled speakers*. In addition to the vertical speaker driver, a second is installed on the upper surface of the loudspeaker and directs the sound towards the ceiling at a carefully calculated angle, so that the signal is reflected around the entire room. The sound comes simultaneously from the front, back, sides and above.

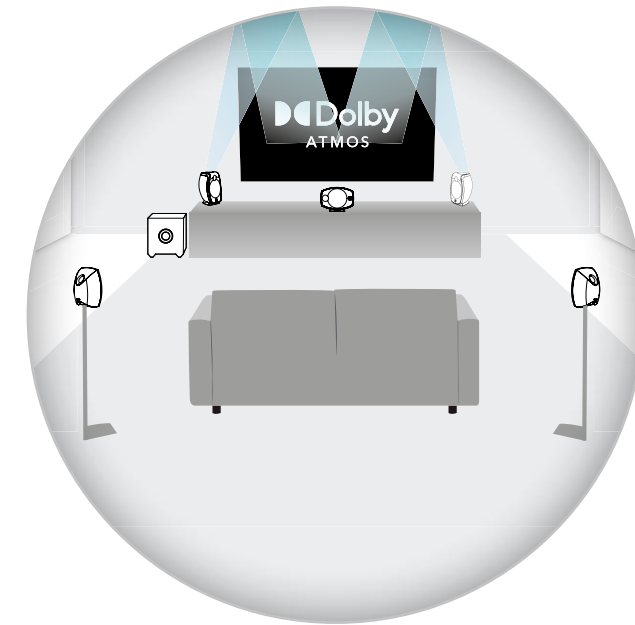

IMMERSIVE AUDIO

Dolby Atmos® technology isolates each sound from the original soundtrack and mix as an independent audio object. Imagine a scene in a house: you are hearing the conversations, the footsteps in the neighbouring room, sounds coming through the open window, all at the same time and spatialised in 3D, as though you were actually there... Dolby Atmos® comes into its own in scenes where the effects are vertical: a plane or helicopter passing overhead, a thunderstorm, pounding rain, etc. The Sib Evo 5.1.2 pack offers exceptional sound effects and adds a new dimension to films.



SIB EVO DOLBY ATMOS®

Type	<ul style="list-style-type: none"> • Front channel: 2-way bass-reflex loudspeaker • Atmos® channel: Full-range sealed loudspeaker 	SIB EVO	2-way compact bass-reflex loudspeaker
Speaker drivers	<ul style="list-style-type: none"> • Front channel: 5" (13cm) Polyflex Woofer • ¾" (19mm) soft dome tweeter • Atmos® Channel: 4" (10cm) full-range speaker 		<ul style="list-style-type: none"> • 5" (13cm) Polyflex Woofer • ¾" (19mm) soft dome tweeter
Frequency response	<ul style="list-style-type: none"> • Front channel: 65Hz to 25kHz • Atmos® Channel: 90Hz to 20kHz 		70Hz to 25kHz
Sensitivity (2.83V/1m)	90dB		90dB
Nominal impedance	6Ω		6Ω
Recommended amp power	25 - 200W		25 - 200W
Dimensions (HxWxD)	11 ⁵ / ₈ x 7 ¹ / ₁₆ x 7 ¹ / ₂ " (29.5 x 19.5 x 19cm)		9 ⁵ / ₁₆ x 6 ³ / ₈ x 6 ³ / ₈ " (25.2 x 16.2 x 16.2cm)
Weight	7lbs (3.25kg)		4lbs (1.8kg)



PACK SIB EVO DOLBY ATMOS® 5.1.2

- 5 x Sib Evo
- 2 x Sib Evo Dolby Atmos®
- 1 x Cub Evo
- 2 x Wall attachment



PACK SIB EVO 5.1

- 5 x Sib Evo
- 1 x Cub Evo
- 2 x Wall attachment



WALL ATTACHMENT

Wall attachment supplied with 5.1 and 5.1.2 packs.



HIP EVO STANDS

Hip Evo stands sold as optional extra.

07. SUBWOOFERS

Dynamics, impact and depth

The subwoofer is a major component of any audio installation, providing dynamics and intensity. With their sleek design, Focal subwoofers offer a deep, impactful and powerful bass. They effectively complement a wide range of configurations, from the most sophisticated Home Cinema installations to compact systems. All you have to do is choose the subwoofer for you!





**SUB UTOPIA EM
COLOUR EVO**



SW 1000 BE



SUB 1000 F



SUB 600P



SUB AIR



CUB EVO



**1000 IWSUB
UTOPIA**

Type	Stackable passive subwoofer	Active bass-reflex subwoofer	Active sealed subwoofer
Speaker drivers	<ul style="list-style-type: none"> Electro-Magnetic 13" (33cm) 'W' bass driver Stackable (up to 3 subwoofers tall) Almost 130dB SPL at 1m (in a corner) 	13" (33cm) 'W' Woofer	12" (30cm) Flax Woofer
Frequency response	22Hz - 500Hz	20Hz - 150Hz	24Hz - 160Hz
Response at - 6dB	19Hz	18Hz	22Hz
Features	Sensitivity (2.83V/1m)	93dB	<ul style="list-style-type: none"> LFE/Stereo inputs Adjustable subsonic crossover: 40Hz to 160Hz/12dB/Oct Phase inverter: 0 - 180° Autopower
	Nominal impedance	8Ω	
	Minimal impedance	5.5Ω	
	Recommended amp power	500 - 1,000W	
Amplifier power	-	600W BASH® amplifier	1000W BASH® amplifier
Finishes	● ○	-	-
Dimensions (HxWxD)	25 ^{15/16} x 19 x 24 ^{1/2} " (63.4 x 48.3 x 62.2cm)	21 ^{1/16} x 19 ^{1/16} x 17" (53.5 x 50 x 43.2cm)	16 ^{17/32} x 15 ^{3/4} x 16 ^{17/32} " (42 x 40 x 42cm)
Weight	158.5lbs (72kg)	92.4lbs (42kg)	47lbs (21.5kg)

Type	Active closed subwoofer	Flat bass-reflex subwoofer	Active bass-reflex subwoofer	
Speaker drivers	12" (30cm) Polyflex Woofer	8" (21cm) Woofer cellulose pulp cone	8" (21cm) Polyflex Woofer	
Frequency response	28Hz - 270Hz	42Hz - 200Hz	35Hz - 150Hz	
Response at - 6dB	26Hz	35Hz	30Hz	
Features	<ul style="list-style-type: none"> RCA input: Right, left, LFE Variable crossover frequency: 40Hz - 200Hz (LFE) Phase inverter: 0 - 180° AutoStandby enable / disable 	<ul style="list-style-type: none"> Wireless Transmitter (KLEER® technology) LFE and Left/Right Input Variable crossover frequency: 50Hz to 200Hz Autopower 	<ul style="list-style-type: none"> Right, left LFE Variable crossover frequency: 40Hz to 200Hz (LFE) On/Autopower (0.5W) 	
	Amplifier power	600W Dynamic 300W RMS	150W BASH® amplifier	200W Class D amplifier
	Finishes	-	● ○	-
	Dimensions (HxWxD)	15 ^{3/4} x 15 ^{3/4} x 16 ^{3/4} " (40 x 40 x 42.5mm)	16.1 x 14.2 x 6.3" (41 x 36 x 16cm)	12 x 11 ^{1/8} x 11 ^{3/4} " (30.5 x 28.2 x 29.9cm)
Weight	46.3lbs (21kg)	17lbs (7.65kg)	17.5lbs (8kg)	



100 IWSUB8
Built-in subwoofer (see p.33)

CI EXPERT OFFICIAL PARTNER

So you can optimise the full potential of our 1000 Series, our dedicated retailer network is on hand to listen to your requirements. These specialist teams are trained in Focal products and can assist you with any questions you may have. Our installers also have priority access to The Cinema Designer global software to accurately design your installation and offer a bespoke service.



Contact our CI Expert reseller network
to help you create your Home Cinema:

www.focal.com/ci-expert



Your bespoke Home Cinema

The Focal Integration products are available on The Cinema Designer global database. This interactive cloud software pulls together the entire design process of an outstanding Home Cinema system. Based on the size of your room, it specifies the exact placement of the loudspeakers, screen, seats and projector. It details requirements in terms of amplification and much more.



SIGNATURE SOUND

In its constant quest for the purest, most immersive and transparent sound, Focal infuses its energy and imagination into the design of loudspeakers to meet every listening and installation need. Traditional floor-standing models or models integrated into walls and ceilings: all speakers benefit from Focal know-how and the same exclusive technologies. They offer a high-fidelity sound harmonious between the ranges and, more broadly, the unique Focal sound signature that will magnify the singularity of every living space.





OUTDOOR SOLUTIONS

- 01. LITTORA 1000 71
- 02. LITTORA 200 77
- 03. 100 SERIES 83




01.

LITTORA 1000

The sound of French Riviera

Experience sensational music-inspired emotion on dry land and at sea: that's the promise made by the Littora 1000 products. Discreetly fitted in the walls and ceilings of yachts and premises located in coastal environments, and spaces such as spas and steam rooms, these products are inspired by the Utopia line of in-wall / in-ceiling products to offer the best outdoor and indoor sound. Equipped with a brand new Fiber IP cone, they benefit from the international IP65 certification, guaranteeing their perfect waterproofing in marine and other wet environments.






IP Fiber cone



Beryllium tweeter




Certified (IP65) waterproofing



Indoor/Outdoor Mode



Adjustable treble level



Ready-to-paint grille





1000 ICW8



1000 ICW10



1000 ICW SUB10

Type	2-way coaxial in-wall/in-ceiling	2-way coaxial in-wall/in-ceiling	Subwoofer in-wall/in-ceiling
Speaker drivers	<ul style="list-style-type: none"> 8" (20cm) Fiber IP Mid-Bass 1" (25mm) pure Beryllium 'M'-shaped inverted dome tweeter 	<ul style="list-style-type: none"> 10" (25cm) Fiber IP Mid-Bass 1" (25mm) pure Beryllium 'M'-shaped inverted dome tweeter 	10" (25cm) Fiber IP Woofer
Frequency response	45Hz - 40kHz	38Hz - 40kHz	25Hz - 500Hz
Sensitivity (2.83V/1m)	91dB	92dB	90dB
Nominal impedance	8Ω	8Ω	8Ω
Recommended amp power	50 - 180W	50 - 200W	100 - 300W
Settings	Tweeter (-3dB, 0dB, +3dB) Crossover: Indoor/Outdoor switch	Tweeter (-3dB, 0dB, +3dB) Crossover: Indoor/Outdoor switch	-
Operating temperatures	-25°C to 90°C	-25°C to 90°C	-25°C to 90°C
UV resistance	Yes	Yes	Yes
Dimensions (ØxD)	10 7/8" x 4 7/8" (25.6 x 12.3cm)	10 7/8" x 5 1/4" (27.8 x 13.3cm)	11 1/2" x 5 3/8" (29.3 x 13.6cm)
Mounting dimensions (Ø)	9 1/8" (23.1cm)	12" (30.5cm)	12 3/4" (32.2cm)
Mounting depth	4 1/2" (11.3cm)	4 3/4" (12.2cm)	4 7/8" (12.3cm)
Weight	4.1lbs (2.2kg)	5.8lbs (2.5kg)	10.2lbs (4.6kg)
Accessory (optional)	8" tilted stand	10" tilted stand	10" tilted stand




02.

LITTORA 200

The Sound of French Riviera

Whether you're on the deck of a yacht, in a spa, a garden, on a terrace, or by the pool - bring Focal sound quality to your outdoor space with speaker drivers and loudspeakers as high performing as they are discreet, and as hard-wearing as they are elegant. Versatility and ease of integration characterise the Littora 200 products, which can be installed anywhere and for an impressive period of time, thanks to their certified watertight Iris IP cone. While the in-wall and in-ceiling speaker drivers blend in seamlessly, the outdoor loudspeakers present unique design and finishes, like OD Stone 8.

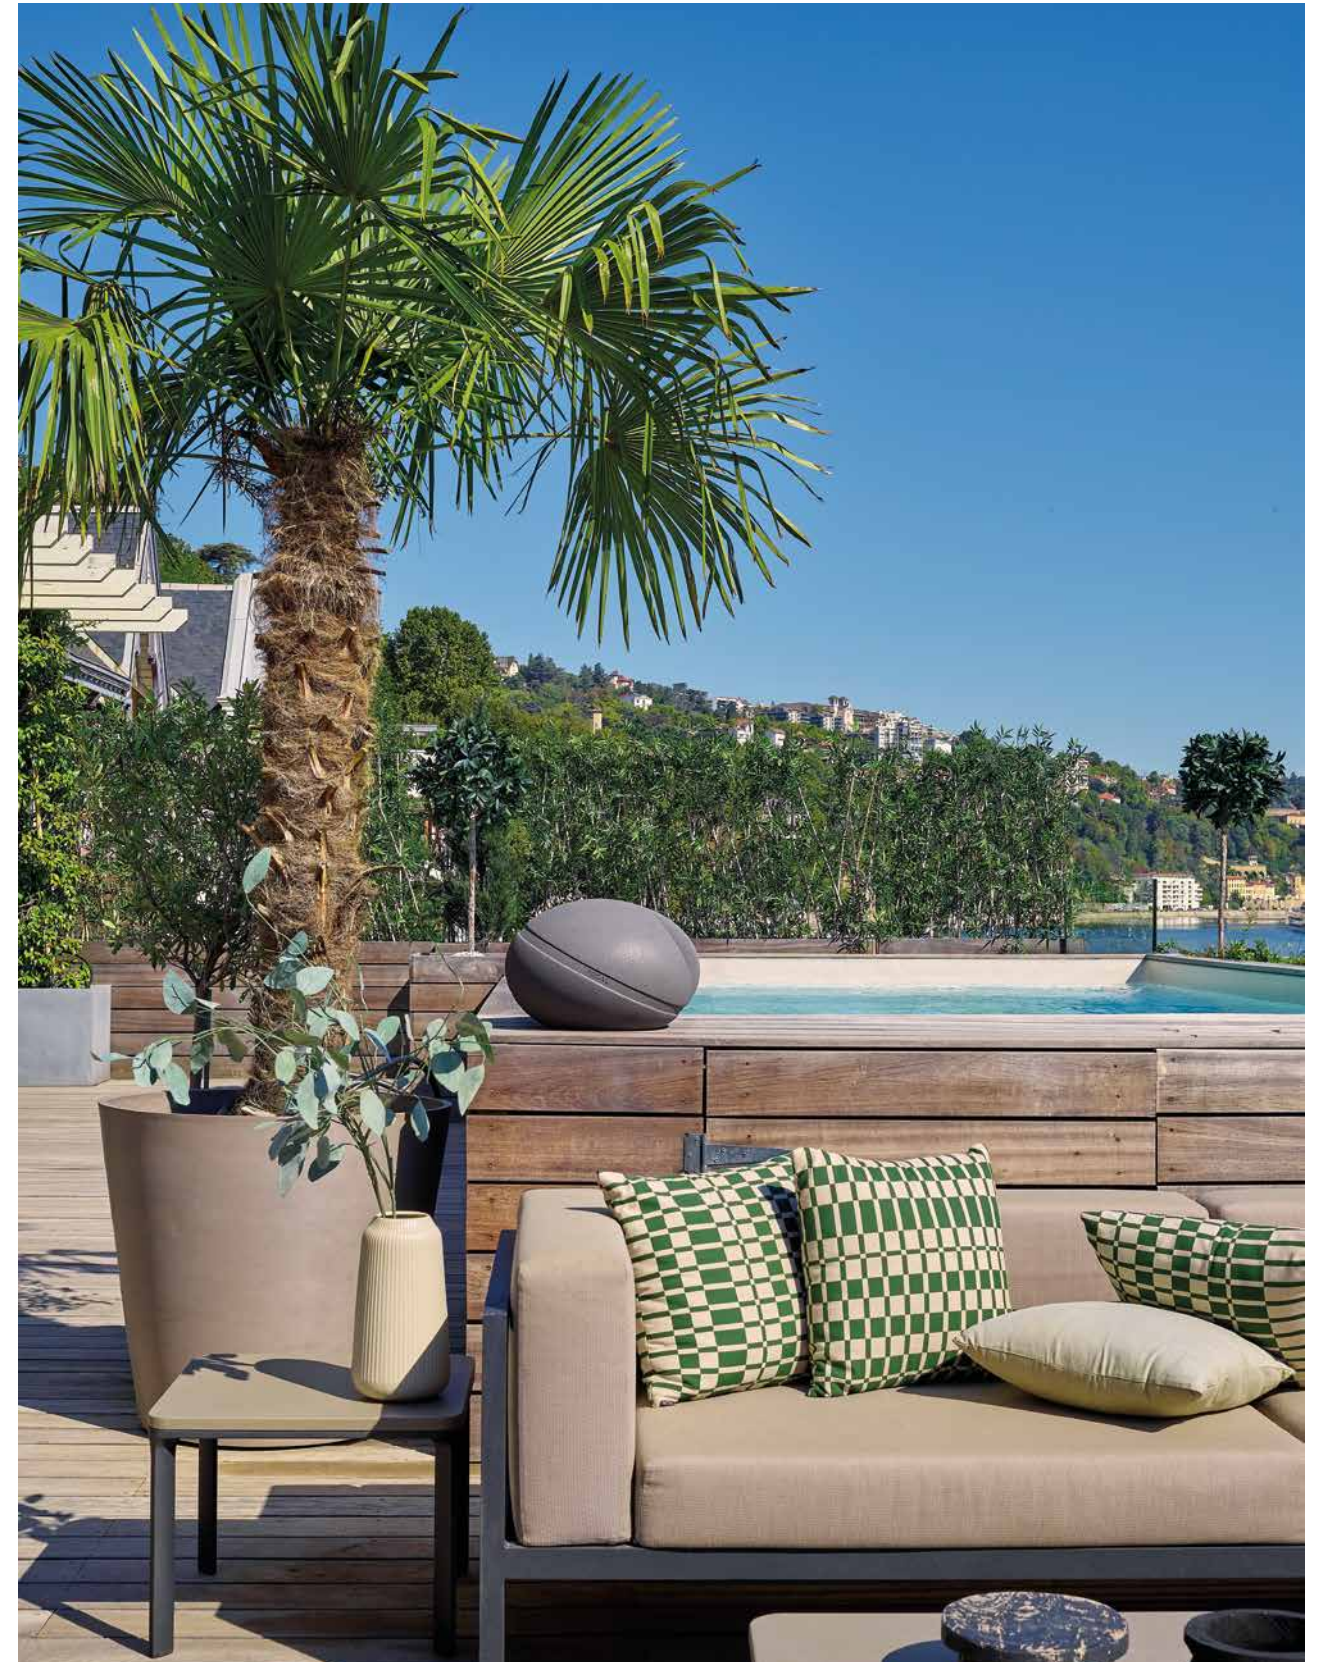



Iris IP cone



Aluminium tweeter



Certified (IP65 / IP55) waterproofing



Sonic coherence, allround system



Modern and sophisticated design



Hard-wearing finishes





OD SAT 5



OD SUB 12



OD STONE 8



200 ICW6



200 ICW8



PACK LITTORA OD 4.1

Type	2-way outdoor speaker	Buried outdoor subwoofer	2-way outdoor speaker
Speaker drivers	<ul style="list-style-type: none"> 5" (13cm) Iris IP Mid-Bass 1" (25mm) Aluminium 'M'-shaped inverted dome tweeter 	12" (30 cm) Iris IP woofer	<ul style="list-style-type: none"> 8" (20cm) Iris IP Mid-Bass 1" (25mm) Aluminium 'M'-shaped inverted dome tweeter
Frequency response	90Hz - 28kHz	40Hz - 120Hz	45Hz - 28kHz
Sensitivity (2.83V/1m)	88dB	90dB	89dB
Nominal impedance	8Ω	6Ω	8Ω
Recommended amp power 8 Ω	20W - 100W	50W - 300W	20W - 150W
Recommended amp power	50W RMS - 100W Peak	100W RMS - 400W Peak	75W RMS - 150W Peak
Power 100V / 70V	5W, 10W, 20W, 40W	-	50W
Crossover settings	-	-	-
Operating temperatures	-25°C to 65°C	-25°C to 65°C	-25°C to 65°C
Dimensions (HXWxD ou ØxD)	12¾ x 12¾ x 8¾" (32 x 32 x 21cm)	14½ x 36¼ x 22¾" (38 x 92 x 56cm)	11⅞ x 17⅞ x 17⅞" (29 x 44 x 44cm)
Mounting dimensions (Ø)	-	-	-
Mounting depth	-	-	-
Finishes			
Weight	5.8lbs (2.5kg)	41lbs (19kg)	14.5lbs (6.5 kg)
Accessory (optional)	-	-	-

Type	2-way coaxial in-wall/in-ceiling	2-way coaxial in-wall/in-ceiling
Speaker drivers	<ul style="list-style-type: none"> 6½" (16.5cm) Iris IP Mid-Bass 1" (25mm) Aluminium 'M'-shaped inverted dome tweeter 	<ul style="list-style-type: none"> 8" (20cm) Iris IP Mid-Bass 1" (25mm) Aluminium 'M'-shaped inverted dome tweeter
Frequency response	65Hz - 28kHz	48Hz - 28kHz
Sensitivity (2.83V/1m)	89dB	90dB
Nominal impedance	8Ω	8Ω
Recommended amp power 8 Ω	-	-
Recommended amp power	25 - 130W	25 - 150W
Power 100V / 70V	-	-
Crossover settings	Indoor/Outdoor switch	Indoor/Outdoor switch
Operating temperatures	-25°C to 90°C	-25°C to 90°C
Dimensions (HXWxD ou ØxD)	8¼ x 3¾" (210 x 95mm)	10¼ x 4⅞" (255 x 113 mm)
Mounting dimensions (Ø)	8¼" (210mm)	10¼" (255mm)
Mounting depth	3¾" (95mm)	4⅞" (113mm)
Finishes	-	-
Weight	3.1lbs (1.8kg)	5.8lbs (2.5kg)
Accessory (optional)	6" tilted stand	8" tilted stand

4 x 200 OD SAT 5
1 x 200 OD SUB 12




03.

100 SERIES

Discreet musicality

The 100 OD6 and 100 OD8 loudspeakers offer Focal quality sound reproduction outdoors. Just like the other models in the 100 Series range, they contain an aluminium inverted dome tweeter and a Polyglass treated bass/mid-range speaker driver at the source of their excellent performance. IP66-certified and benefiting from anti-UV treatment, they are resistant to all weathers and are easily mounted either vertically or horizontally.

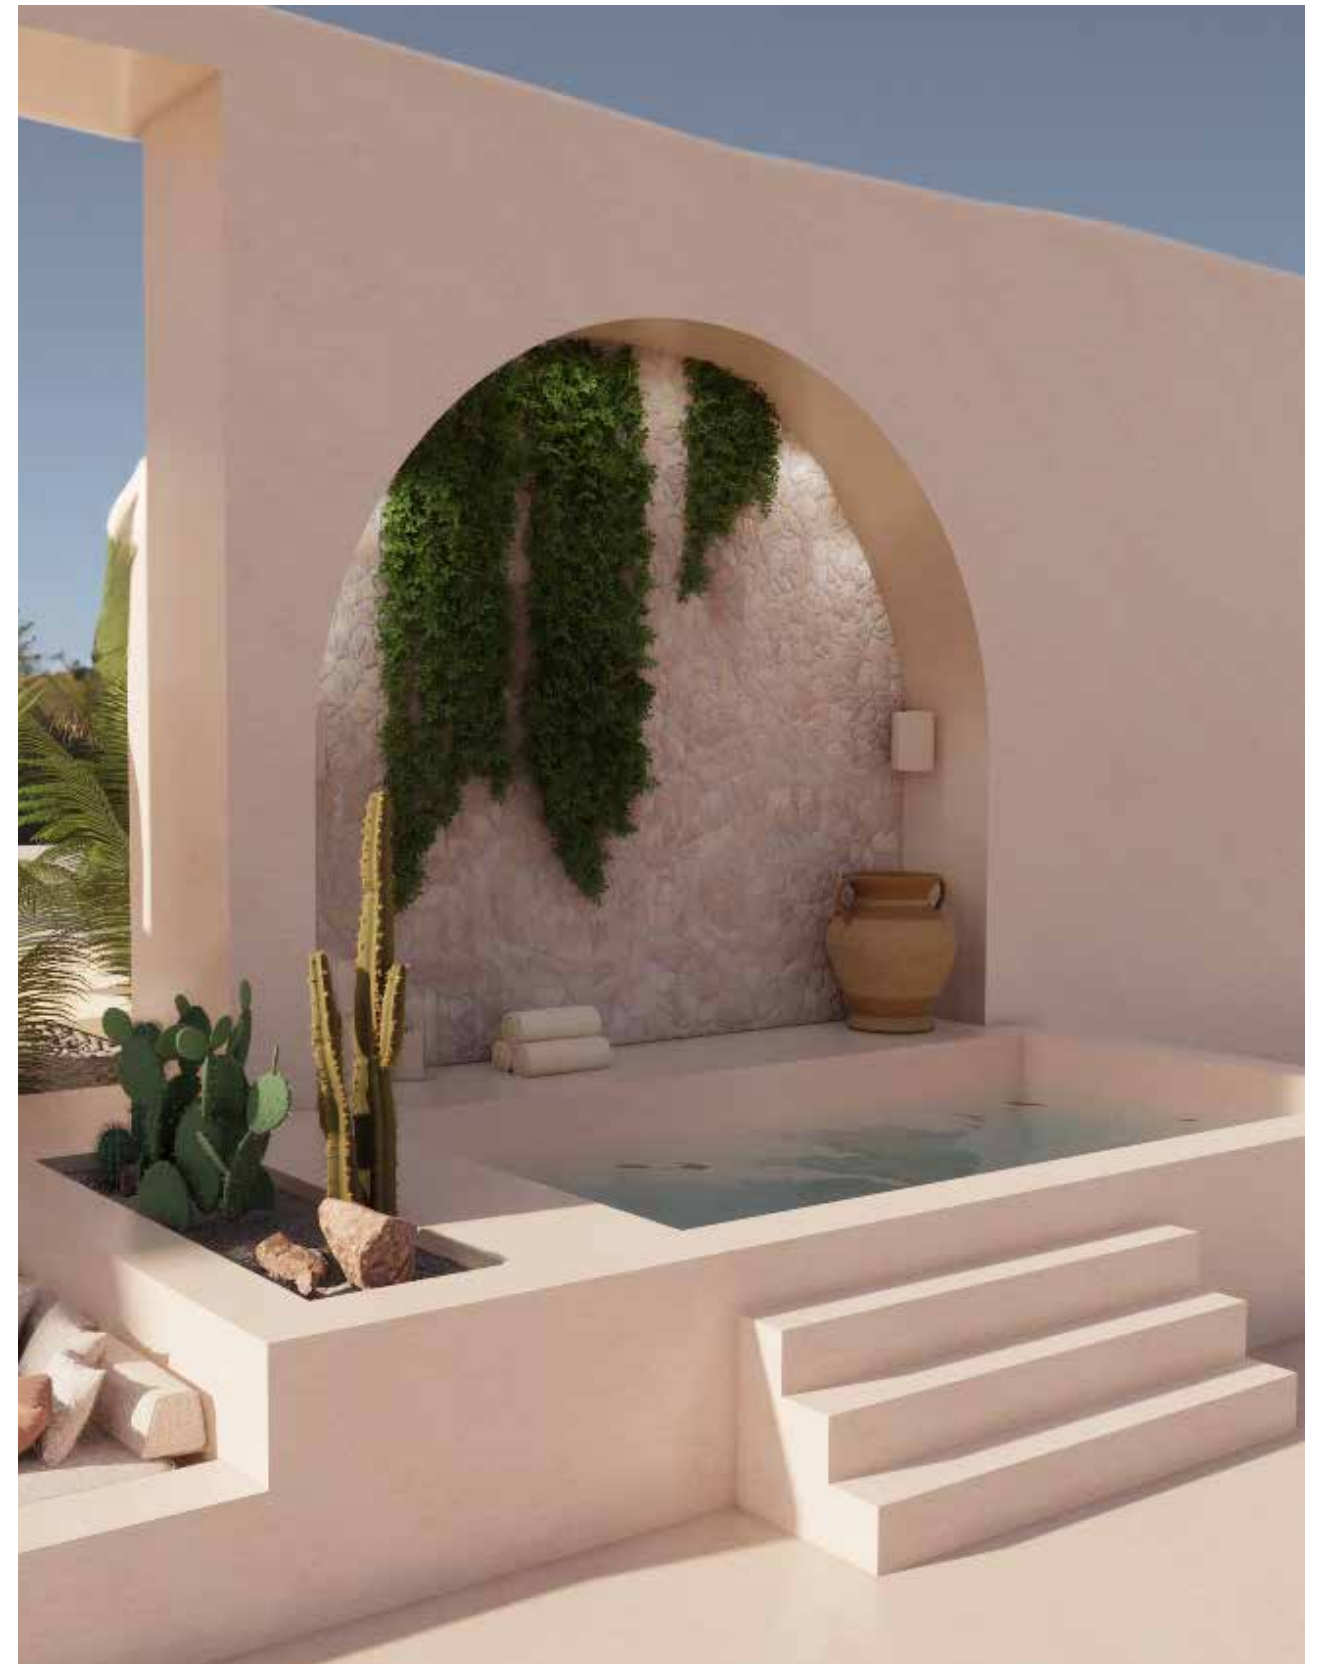



Polyglass cone




Horizontal vertical position




Resistance XXX certification



Closed-back construction



Wide sound dispersion



White / Black finish





IP66

100 OD8

Type Outdoor loudspeaker

- Speaker drivers**
- 8" (21cm) Polyglass Mid-Bass
 - 1" (25mm) Aluminium inverted dome tweeter

Frequency response 60Hz - 23kHz

Sensitivity (2.83V/1m) 88dB

Nominal impedance 8Ω

IP certification IP66

Recommended amp power 20 - 150W

Dimensions with brackets (HxWxD) 15^{5/16} x 10^{3/16} x 11" (39 x 25.8 x 28cm)

Finishes ● ○

Weight 12.6lbs (5.8kg)



IP66

100 OD6

Type Outdoor loudspeaker

- Speaker drivers**
- 6^{1/2}" (16.5cm) Polyglass Mid-Bass
 - 1" (25mm) Aluminium inverted dome tweeter

Frequency response 65Hz - 23kHz

Sensitivity (2.83V/1m) 87dB

Nominal impedance 8Ω

IP certification IP66

Recommended amp power 20 - 120W

Dimensions with brackets (HxWxD) 12^{9/16} x 8^{13/16} x 10^{1/16} (31.9 x 22.4 x 25.6cm)


Finishes ● ○

Weight 9lbs (4.1kg)



ELECTRONICS

- 01. ASTRAL 16 91
- 02. CI SERIES 97
- 03. UNITI 103
- 04. MU-SO 113

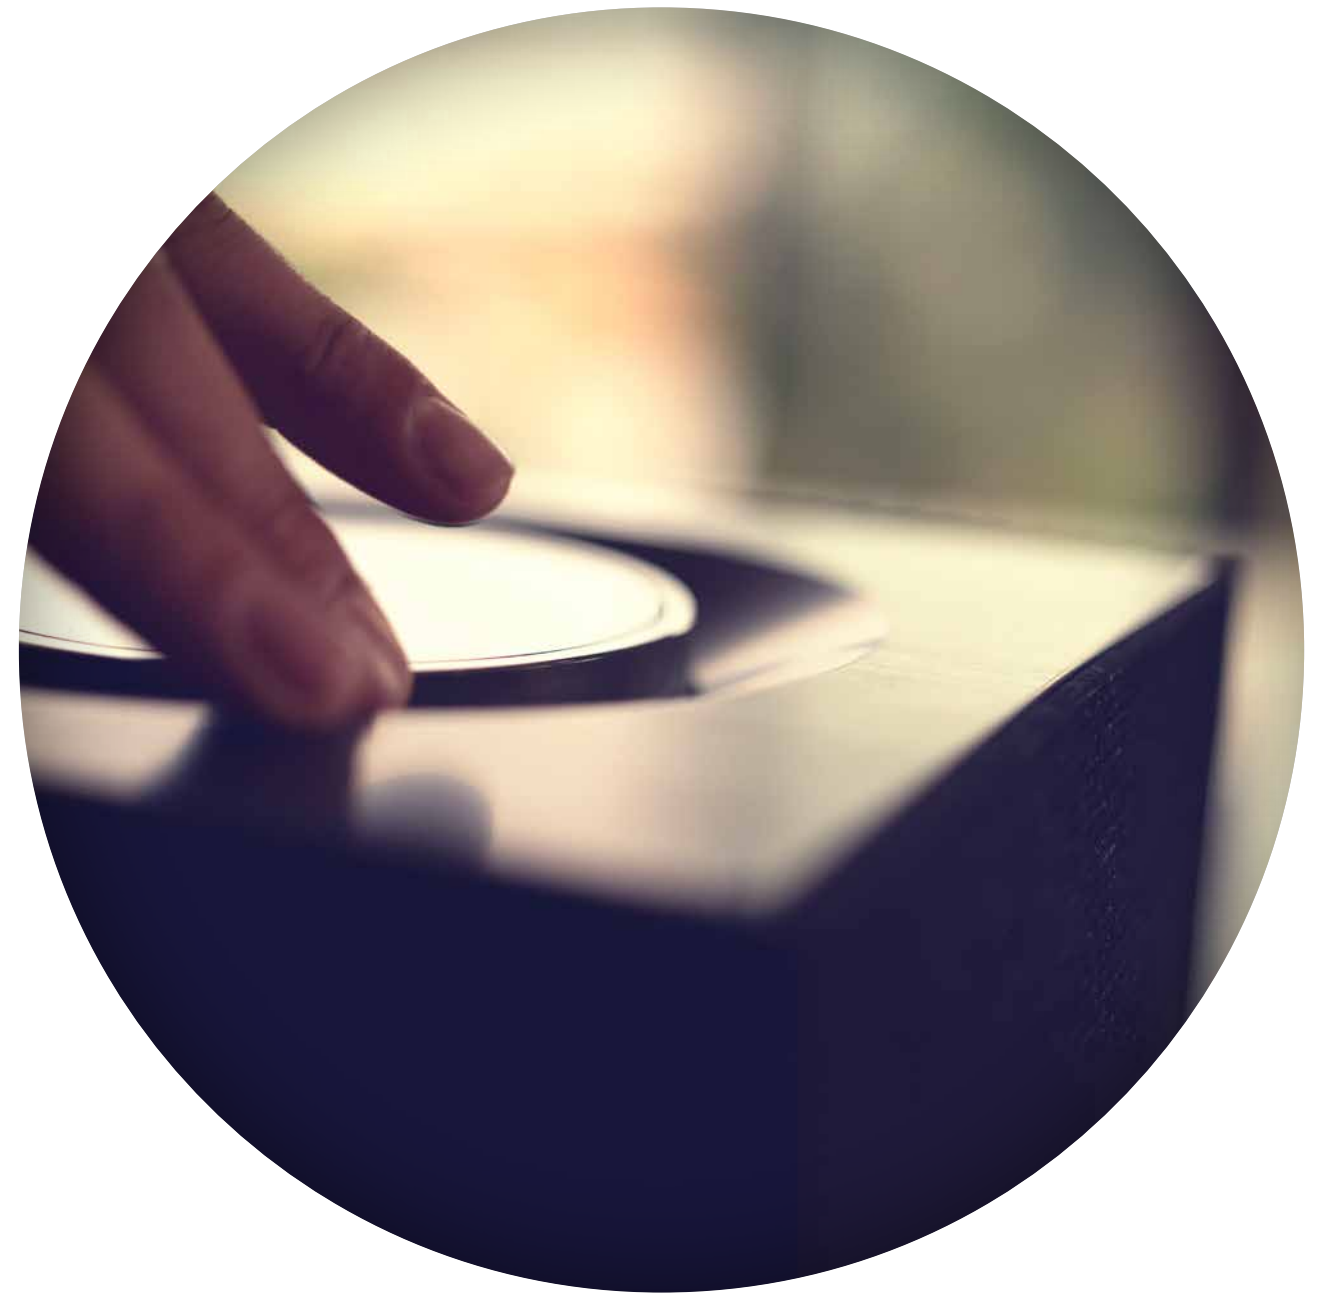



01.

ASTRAL 16

Sound immersion

Astral 16 is a 16-channel audio-video processor and amplifier that allows you to enjoy your private cinema screenings at their best. Compatible with Control4, Crestron, Savant and RTI, this cutting-edge electronic device incorporates 12 class-D amplified channels and handles all audio formats (DolbyAtmos®, DTS:X™ etc.). You can control whichever system you want by room via a simple app, enjoy access to technical support at any time and customise your system as desired.

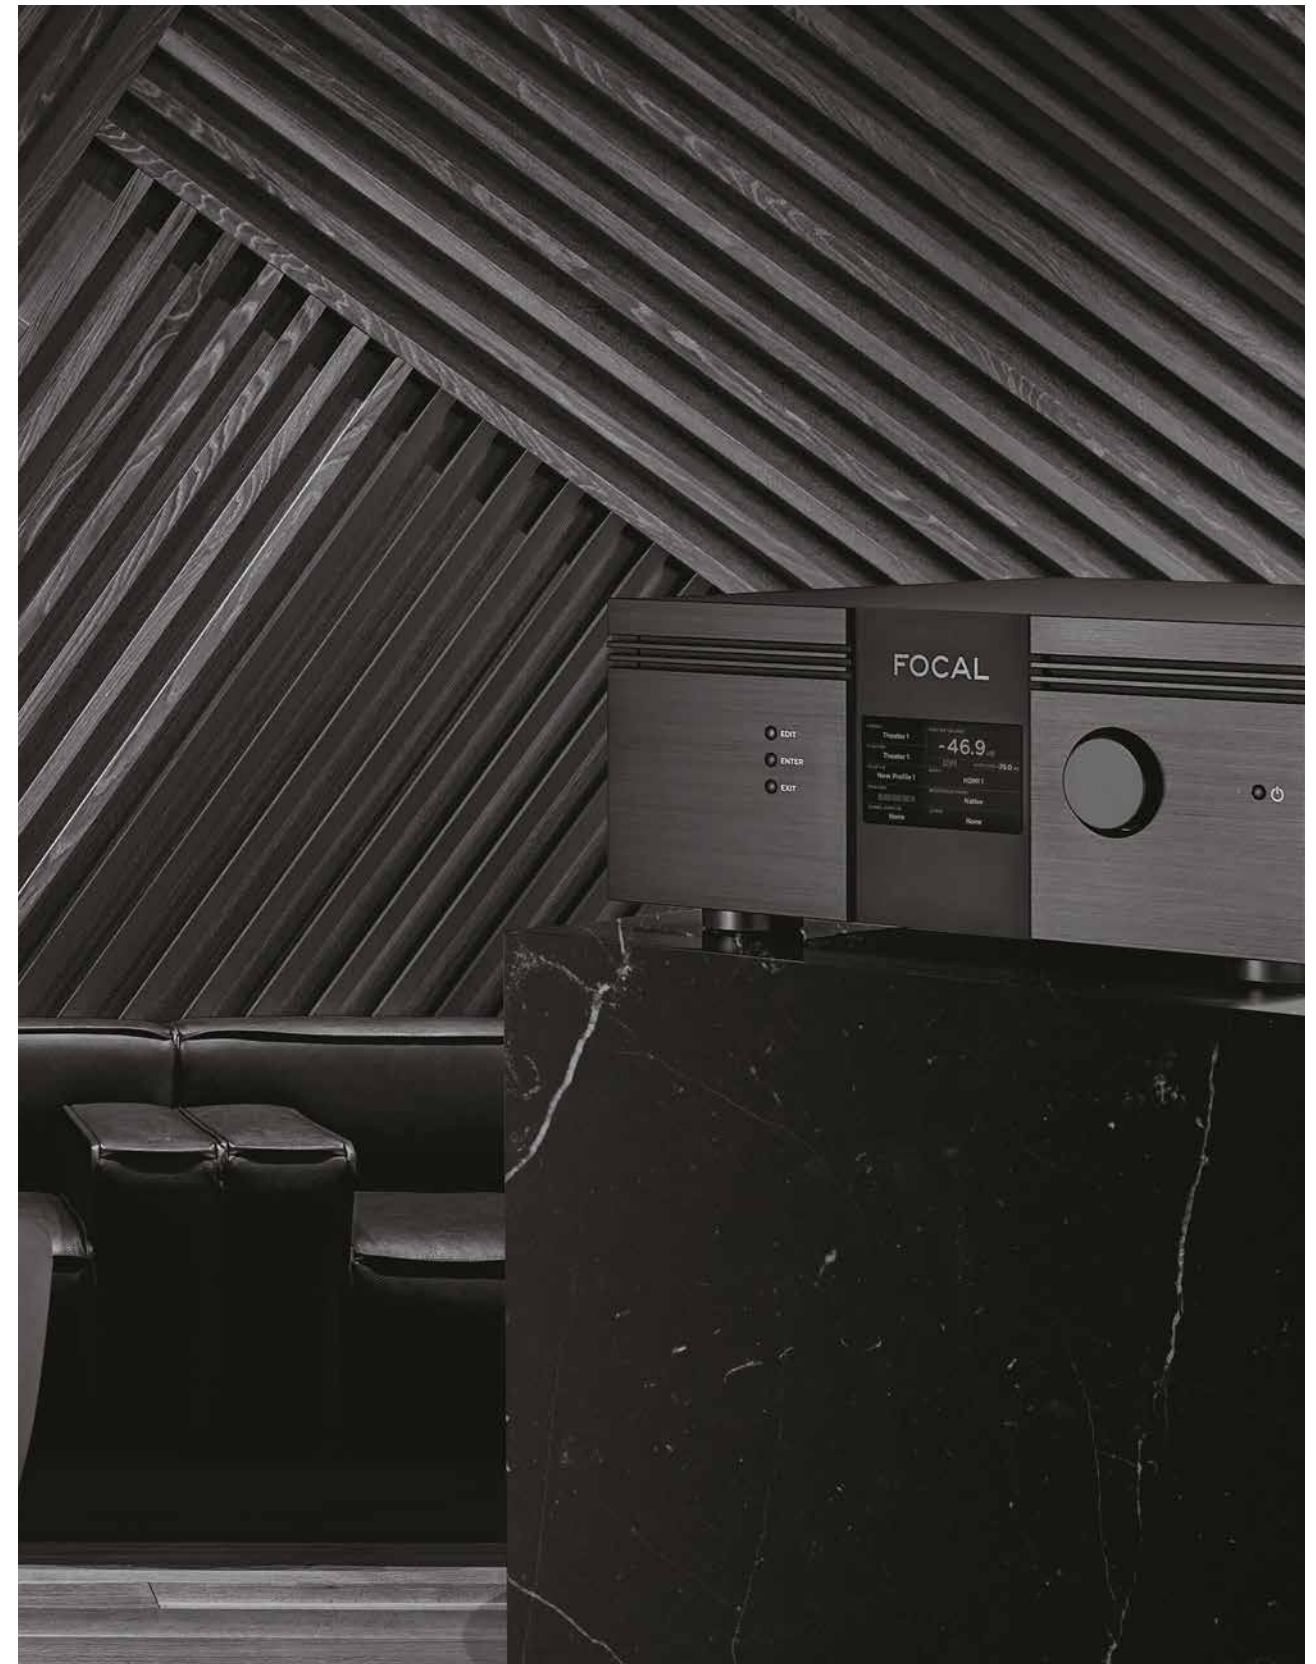




Audio-video processor




Upgradable product



12 x 250W RMS




Home Theater & Multiroom



Dolby Atmos®
DTS:X® - Auro 3D®



Dirac Live® acoustics correction

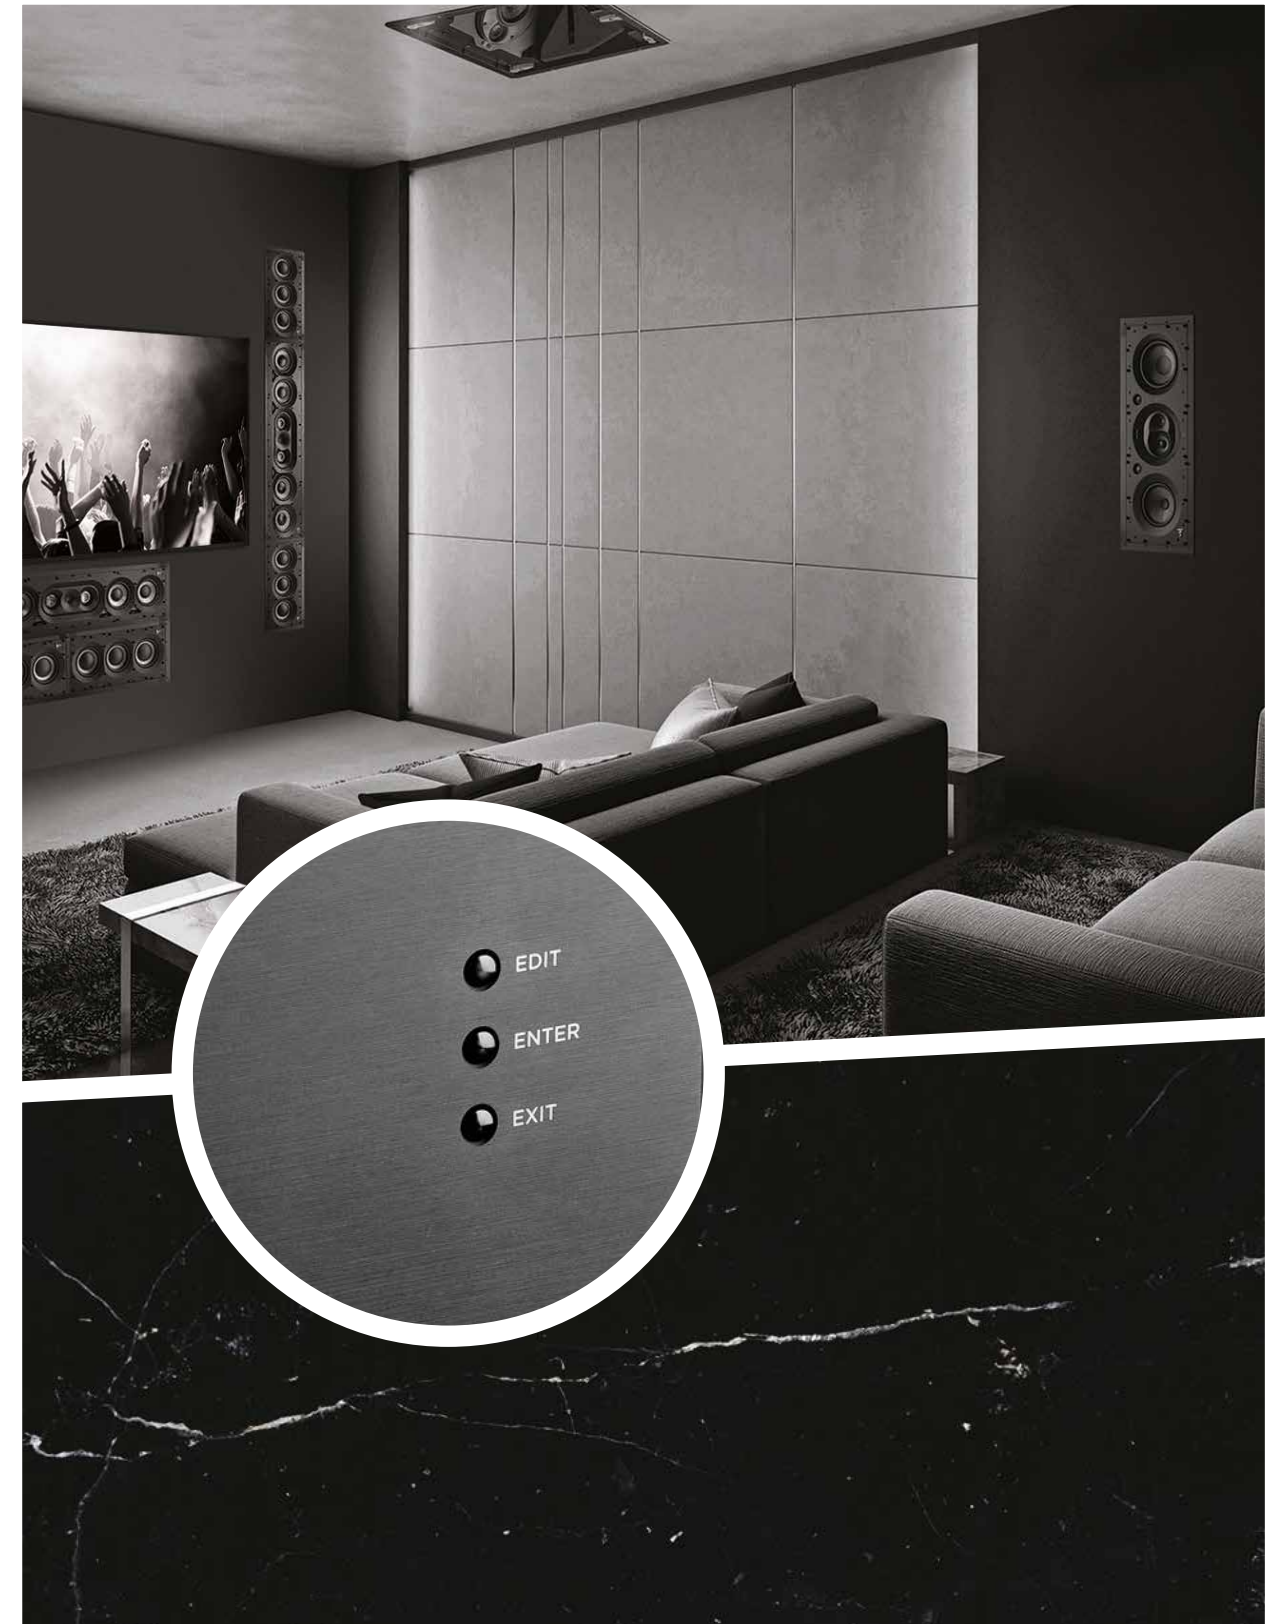



ASTRAL 16

Type	16 channel audio-video processor and amplifier	
Main features	• Compatible formats	Dolby Atmos [*] / DTS:X™ / Auro-3D [*]
	• Calibration	Powered by Dirac Live [®] : target curve editable from 20Hz to 20kHz for all channels (including subwoofers), phase correction full bandwidth 20Hz - 20kHz on all channels (including subwoofers)
	• 'Remote Monitoring' function	
Multichannel / Surround Processing	• Output channels	16
	• Decoding / upmixing channels	Up to 16 channels
HDMI	• Input sampling rate supported	Up to 192kHz
	• Stereo downmix	
	• Bass management	Fully flexible
	• Multi-subwoofer channels	Unlimited
	• Multi-way crossover	(6-12-18-24-36-48dB/oct)
	• 20 Parametric EQ per channel	
Audio Inputs	• HDMI inputs	7 : HDMI 2.0 / HDCP 2.2
	• HDMI outputs (mirror)	1 : HDMI 2.0 / HDCP 2.2 (with eARC) 2 : HDMI 2.0 / HDCP 2.2
	• Supported video format	up to 4K UHD
	• High Dynamic Range	HDR10 / HLG
	• Color Space and Subsampling	4:4:4, 4:2:2, 4:2:0
	• Deep Color	12 bpc
	• Max resolution supported	4K 60fps 4:4:4 8bpc
• HDMI	3D / 4K / eARC	
Amplified Audio Outputs	• Digital input	3 x coaxial, 3 x optical
	• Analog stereo inputs	4 x RCA inputs
	• Amplified main outputs	12
	• Analog main outputs, balanced	4 x XLR
	• Stereo downmix outputs, balanced	2 x XLR
	• Technology	Class D
	• Amplified channels	12
	• Continuous power output, per channel, to 0.1%THD	8Ω / 4Ω / 2.7Ω
	• 3 channels driven simultaneous	200W / 400W / 650W
	• 6 channels driven simultaneous	200W / 350W / 350W
• 12 channels driven simultaneous	200W / 300W	

Set-Up Management	<ul style="list-style-type: none"> • Configurable multi-theater management • Configurable audio zones management • Unlimited Theater and audio zones listening presets • Backup and restore of set-up • Firmware update via USB/network 		
Control Inputs and Outputs	• USB type A	2	
	• Ethernet		
	• Trigger	4 (out)	
	• IR remote ports, in/out	1 / 1	
Control and custom Installation	<ul style="list-style-type: none"> • Web-based product configurator • TCP/IP API based control • Focal Remote iPad[®] control application • Home automation • Front panel display 		
		Control4, Crestron, RTI and Savant TFT 4.3"	
	Power Supply	• Voltage range	100V to 240V
		• Type	SMPS
		• Range selection	Universal
Supplied with	<ul style="list-style-type: none"> • Calibrated measurement microphone and tripod • Dirac Live[®] license • 32.9ft (10m) cable with infra-red detector • Mounting kit 		
	Dimensions avec stands (HxWxD)	7½ x 18⅞ x 19⅝" (19.1 x 47.9 x 49cm)	
	Weight	Weight net with stands	44.1lbs (20kg)
		Weight net with accessories for rack	50.7lbs (23kg)

02.

CI SERIES


The best in integrated audio

The Naim CI Series range of electronics has been designed to be the perfect complement to Focal integrated loudspeakers, as well as hi-fi speakers such as Theva, Vestia and Aria Evo X. Combining versatility, compactness, upgradability and sound quality, these three amplification solutions cater to all installation preferences with both power and discretion.






Compact and powerful



Focal Speaker Profiles




Focal & Naim Manager software



Integrated DSP



Rackable products



Compatibility 70/100V line





	CI-NAP 101		CI-NAP 108	
Type	Amplifier		Amplifier	
Number of channels	1		8	
Power low impedance	8 Ω	500W	150W	
	4 Ω	800W	260W	
	2 Ω	810W	260W	
Power high impedance	100 V	240W	-	
	70 V	150W	-	
Audio Inputs	Analogue - RCA stereo Combined to mon (47 kΩ)		Analogue - RCA (47kΩ)	
Audio Outputs	Line	Stereo RCA	Line	RCA
	Low Impedance	Euroblock		
	70V	Euroblock	Speakers	Euroblock
	100V	Euroblock		
Total Harmonic Distortion	<0.008%		<0.006%	
Gain	29dB		29dB	
Signal-to-noise ratio	110dB (A-weighted)		105dB (A-weighted)	
Frequency response (-3dB)	Low impedance	3Hz - 70kHz	3Hz - 70kHz	
	High impedance	50Hz/120Hz - 25kHz		
Operating power supply	100V to 240V +/-10%, 50/60Hz		100V to 240V +/-10%, 50/60Hz	
Wired automation	12V in/out		12V in/out	
Rack height	1U		1.5 U	
Dimensions (HxLxD)	1¾ x 17½ x 11¾" (4.45 x 44 x 30cm)		2½ x 17½ x 11¾" (6.66 x 44 x 30cm)	
Weight	19.6lbs (8.9kg)		15.4lbs (7.7kg)	

	CI-UNITI 102	
Type	Streamer amplifier	
Number of channels	Line	4
	Amp	2
Power (Low Impedance)	8 Ω	150W
	4 Ω	260W
	2 Ω	480W
Audio Inputs	<ul style="list-style-type: none"> Analogue - Stereo RCA - (47kΩ / 2.5V RMS) S/PDIF - up to 96kHz / 24bit HDMI eARC - LPCM up to 192kHz / 24bit Stereo 	
Audio Outputs	<ul style="list-style-type: none"> Main: 1 Stereo RCA Amplified: Terminal block / Euroblock / Banana connector - 4mm Sub/Aux : 1 Stereo RCA 	
Compatible streaming services	TIDAL • TIDAL Connect • Spotify Connect - Free + Premium support • Qobuz • UPnP with playqueue • Internet Radio + Podcasts Airplay2 • ChromeCast v2 • Dante Receiver - 48 kHz supported • Bluetooth® Classic Audio Receiver • SBC + AAC supported	
User interface	Focal & Naim App: Basic use Focal & Naim Manager: Configuration	
Compatible operating systems	Focal & Naim: iOS et Android Focal & Naim Manager: Windows, MacOS	
Multiroom	Naim Multiroom - Up to 32 devices on a single session Compatible with all generations of Naim streamers	
Integration partners	Control4, Crestron, EAN, Savan	
Wired automation	2 x 1/8" (3.5mm) mono jack connectors - 12V trigger outputs	
Network	<ul style="list-style-type: none"> RJ45 Gigabit Ethernet - compatible with IPv4 and IPv6 802.11ax (Wifi 6) - 2x2 MIMO - External antenna Bluetooth LE v5.1 - External antenna shared with Wifi1 	
Total Harmonic Distortion	<0.006%	
Gain	29dB	
Signal-to-noise ratio	110dB (A-weighted)	
Frequency response (-3dB)	5Hz - 70kHz	
Max sampling rate	32 bit / 384 kHz	
Operating power supply	100V to 240V +/-10%, 50/60Hz	
Rack height	1U	
Dimensions (HxLxD)	1¾ x 11¾ x 11¾" (4.45 x 30 x 30cm)	
Weight	9.9lbs (4.5kg)	

03.

UNITI

Amplify your emotions

The Uniti line from Naim Audio comprises all-in-one players that work individually or in combination with other devices. Simply add loudspeakers to allow your music to express itself fully in any room in your home. Assembled by hand by the Naim experts in their Salisbury workshops in England, these sleek and compact players offer a deep immersive sound.






Multiroom
Naim app



Glass LCD
colour screen



Volume
wheel




Brushed
Aluminium



High-resolution
streaming



Multiple
sources

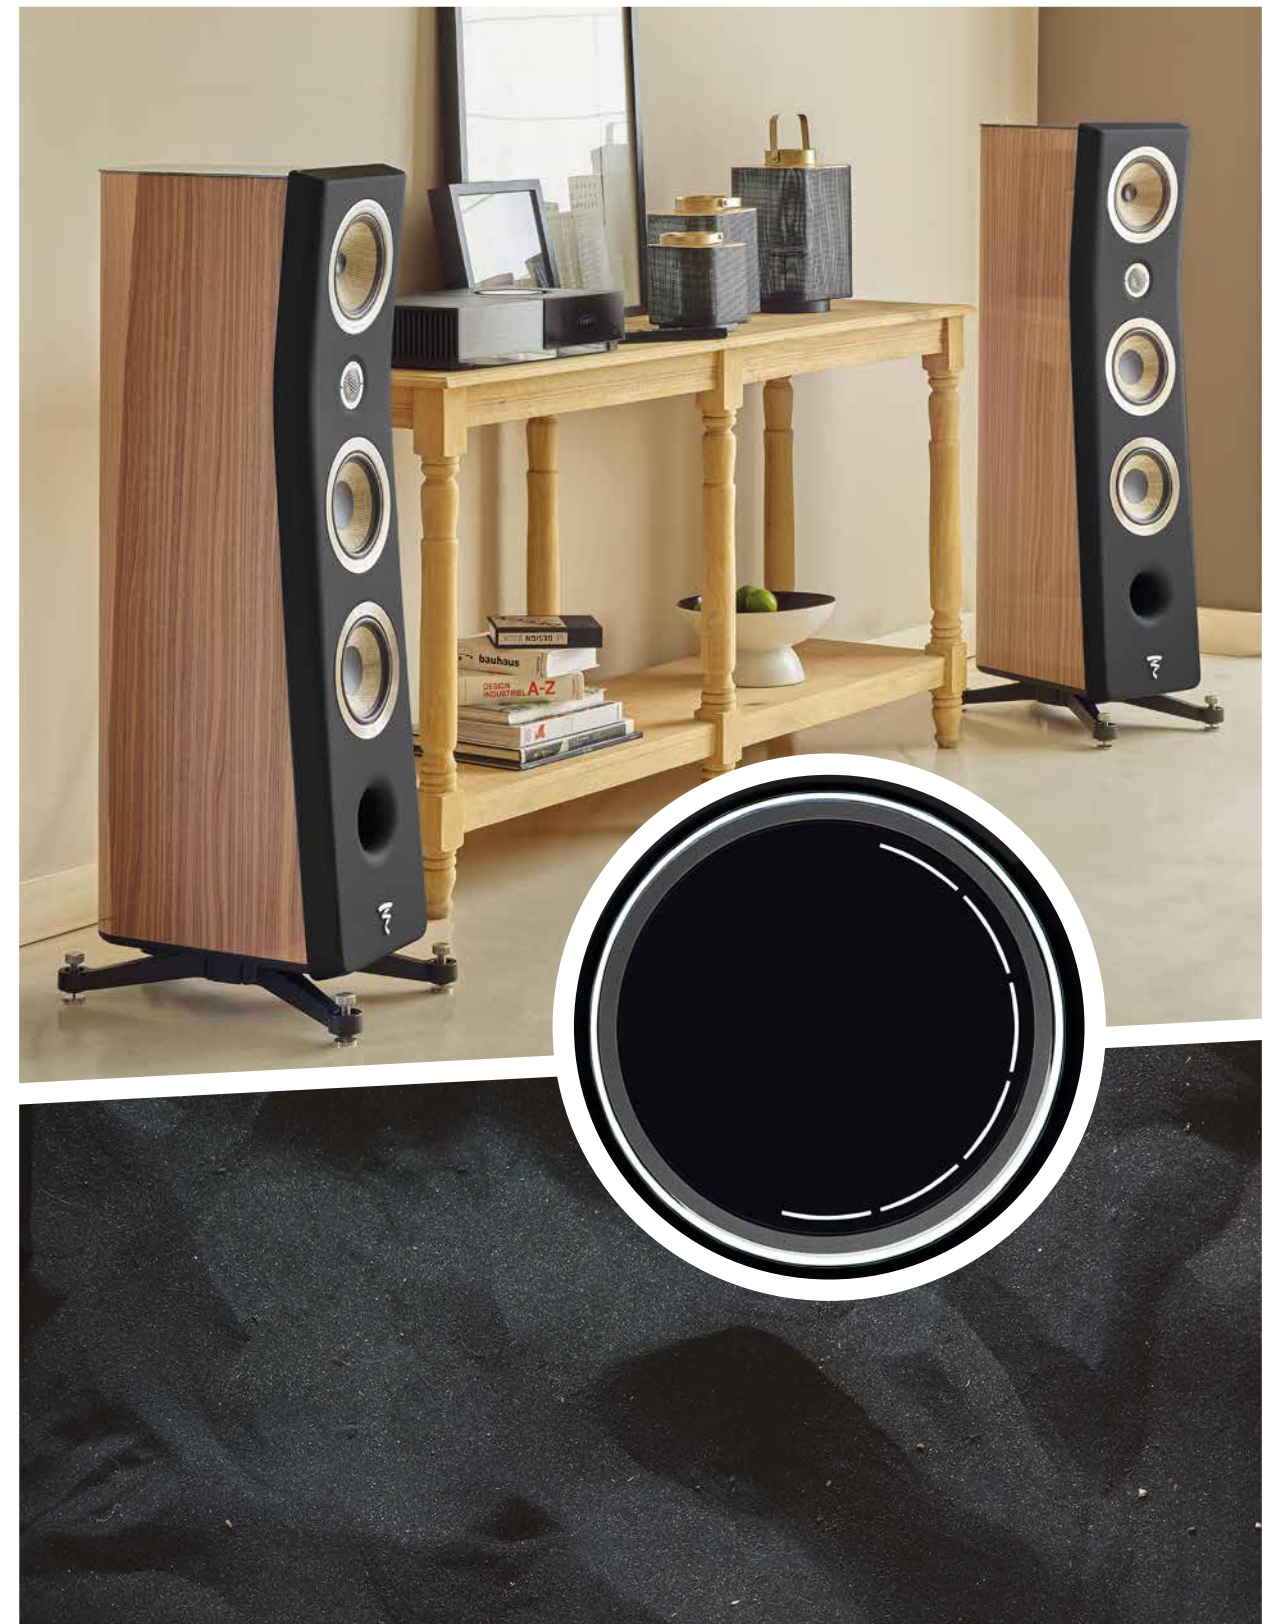



UNITI NOVA PE

Type	All-in-one music streaming player
Streaming	Chromecast Built-In, Apple AirPlay2, TIDAL, TIDAL Connect, Spotify® Connect, Qobuz, Bluetooth® (AptX HD), Internet Radio, UPnP™ (hi-res streaming), Roon Ready.
Audio inputs	<ul style="list-style-type: none"> • 2 x Optical TOSLINK (up to 24bit/96kHz) • 2 x Coaxial RCA (up to 24bit/192kHz, DoP 64Fs) • 1 x BNC (up to 192kHz, DoP 64Fs) • 1 x HDMI ARC • 2 x RCA pairs • 2 x 5-pin DIN • 2 x USB Type A socket (front and rear)
Audio outputs	<ul style="list-style-type: none"> • 1 x Stereo power amplifier • 1 x 4-pin DIN • 1 x RCA pair • 1 x 3.5mm headphone jack
USB	2 x USB Type A Socket (front and rear - 1.6A charge)
Multiroom	Sync up to five Naim Streaming products and control via the Focal & Naim App
Amplifier output	150W 8 Ω @ 0,1 % THD+N 250W 4 Ω @ 0,1 % THD+N
Dimensions (HxWxD)	4½ x 17 x 10⅝" (11.6 x 43.2 x 26.5cm)
Weight	33.3lbs (15.1kg)




UNITI NOVA

Type	All-in-one music streaming player
Streaming	Streaming: Apple AirPlay 2, Chromecast Built-in, UPnP™, Spotify® Connect, TIDAL, Roon Ready, Bluetooth, Internet Radio, Qobuz
Audio inputs	<ul style="list-style-type: none"> • 2 x Optical TOSLink (up to 24bit/96kHz) • 2 x Coaxial RCA (up to 24bit/192kHz, DoP 64Fs) • 1 x BNC (up to 192kHz, DoP 64Fs) • 1 x HDMI ARC • 2 x RCA • 2 x 5-pin DIN • 2 x USB Type A socket (front and rear) • 1 x SD card
Audio outputs	<ul style="list-style-type: none"> • 1 x Stereo power amplifier • 1 x RCA sub/pre output • 1 x 3.5mm headphone jack
USB	2 x USB Type A Socket (front and rear)
Multiroom	Sync up to five Naim Streaming products and control via the Focal & Naim App
Amplifier output	80W per channel into 8Ω
Dimensions (HxWxD)	3¾ x 17 x 10½" (9.5 x 43.2 x 26.5cm)
Weight	28.7lbs (13kg)




	UNITI STAR	UNITI ATOM
Type	All-in-one music streaming player	All-in-one music streaming player
Streaming	Streaming: Apple AirPlay 2, Chromecast Built-in, UPnP™, Spotify® Connect, TIDAL, Roon Ready, Bluetooth, Internet Radio, Qobuz	Streaming: Apple AirPlay 2, Chromecast Built-in, UPnP™, Spotify® Connect, TIDAL, Roon Ready, Bluetooth, Internet Radio, Qobuz
Audio inputs	<ul style="list-style-type: none"> • 2 x Optical TOSLink (up to 24bit/96kHz) • 2 x Coaxial RCA (up to 24bit/192kHz, DoP 64Fs) • 1 x BNC (up to 192kHz, DoP 64Fs) • 1 x HDMI ARC • 1 x RCA • 1 x 5-pin DIN • 2 x USB Type A socket (front and rear) • 1 x SD card 	<ul style="list-style-type: none"> • 2 x Optical TOSLink (up to 24bit/96kHz) • 1 x Coaxial RCA (up to 24bit/192kHz, DoP 64Fs) • 1 x HDMI ARC • 1 x RCA • 2 x USB Type A socket (front and rear)
Audio outputs	<ul style="list-style-type: none"> • 1 x Stereo power amplifier • 1 x RCA sub/pre output • 1 x 3.5mm headphone jack 	<ul style="list-style-type: none"> • 1 x Stereo power amplifier • 1 x RCA sub/pre output • 1 x 3.5mm headphone jack
USB	2 x USB Type A Socket (front and rear)	2 x USB Type A Socket (front and rear)
Multiroom	Sync up to five Naim Streaming products and control via the Focal & Naim App	Sync up to five Naim Streaming products and control via the Focal & Naim App
Amplifier output	70W per channel into 8Ω	40W per channel into 8Ω
Dimensions (HxWxD)	3¾ x 17 x 10½" (9.5 x 43.2 x 26.5cm)	3¾ x 9¾ x 10½" (9.5 x 24.5 x 26.5cm)
Weight	26.5lbs (12kg)	15.45lbs (7kg)

	UNITI CORE
Type	Audio server
Audio inputs	2 x USB Type A Socket (front and rear)
CD Ripping	Create bit-perfect copies of your CDs, store them internally and play back (external DAC or digital input amplifier needed).
CD Formats	Audio CD (Red Book, CD and CD-R)
Audio outputs	1 x BNC S/PDIF
Multiroom	Serve up to 12 network-connected players via UPnP™ Music stored locally on Uniti Core: 384k 32-Bit WAV, 24576kb/s: <3 streaming 384k 24-Bit WAV, 18232kb/s: <5 streaming 192k 24-Bit WAV, 9216kb/s: >12 streaming 44.1k 16-Bit WAV, 1411kb/s: >16 streaming Music stored on a NAS: 192k 24-Bit WAV, 9216kb/s: <8 streaming
Network	Ethernet (10/100/1000Mbps) or Wifi
Dimensions (HxLxP)	3¾ x 8½ x 10½" (9.5 x 21.4 x 26.5mm)
Poids	15.45lbs (7kg)

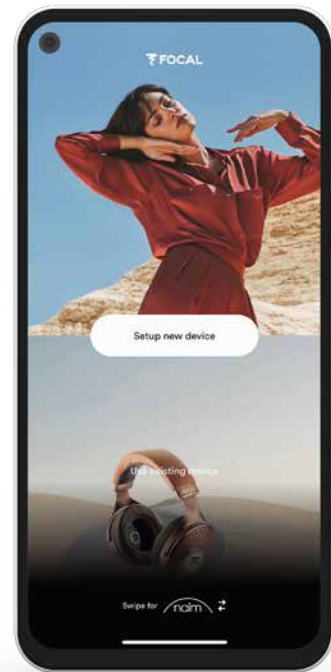

FOCAL & NAIM APP

Available on iOS and Android, the simple yet sophisticated Naim App lets you easily control and organise your audio experience across all connected Naim products. Play music in every room, adjust the volume, choose your tracks, browse album covers, create playlists, save your favourite radio stations, and much more.

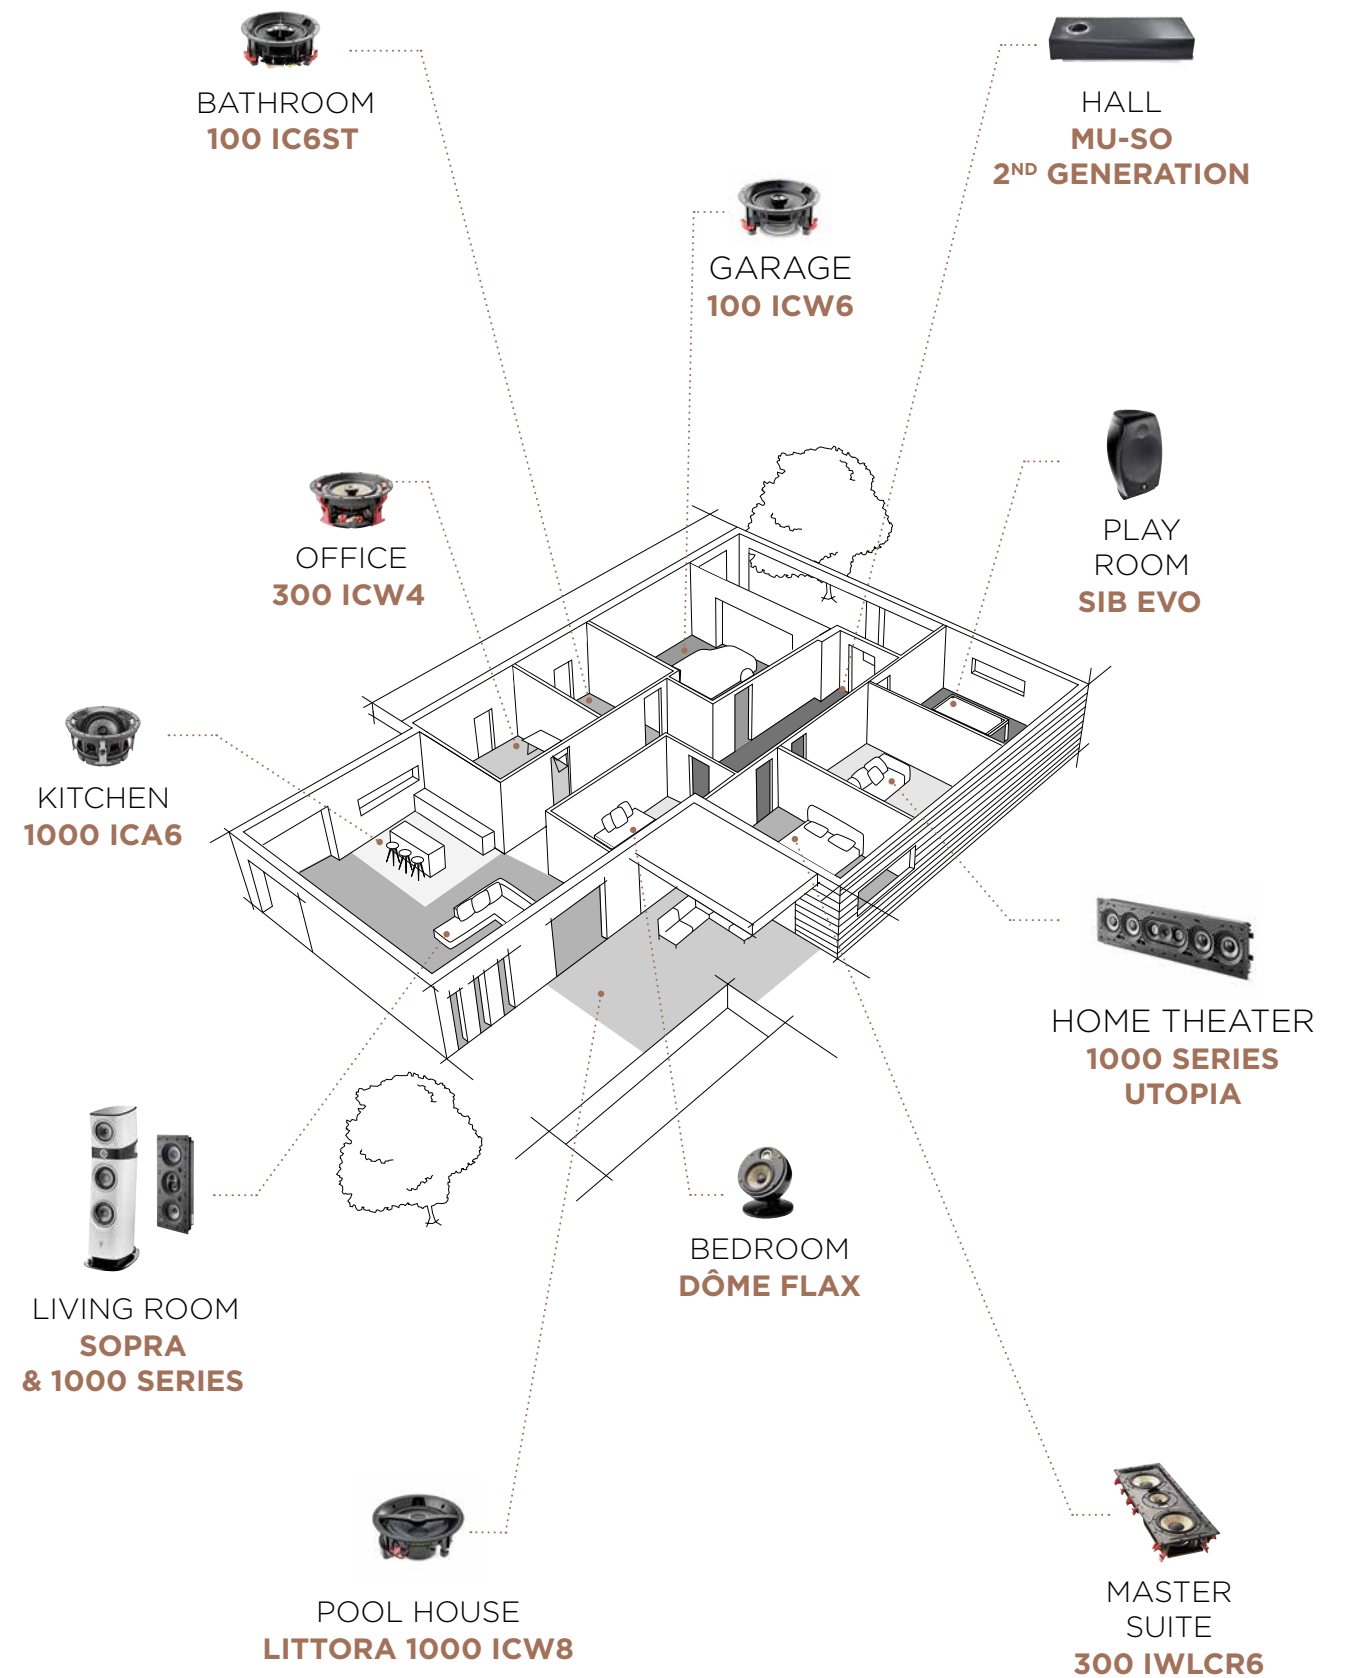

04.

MU-SO


Remastered excellence

The Mu-so 2nd Generation family from Naim Audio are wireless all-in-one systems that deliver high-resolution listening experiences, whether you want to enjoy your digital musical collection, Internet radio or streaming platforms. You will also benefit from multi-room installation options, multiple features and, of course, musical power delivered by their Focal-optimised speaker drivers.





Multi-room application



Aluminium heatsink




Interactive control crown




Brushed Aluminium finish




Integrated streaming services



Black or coloured grille

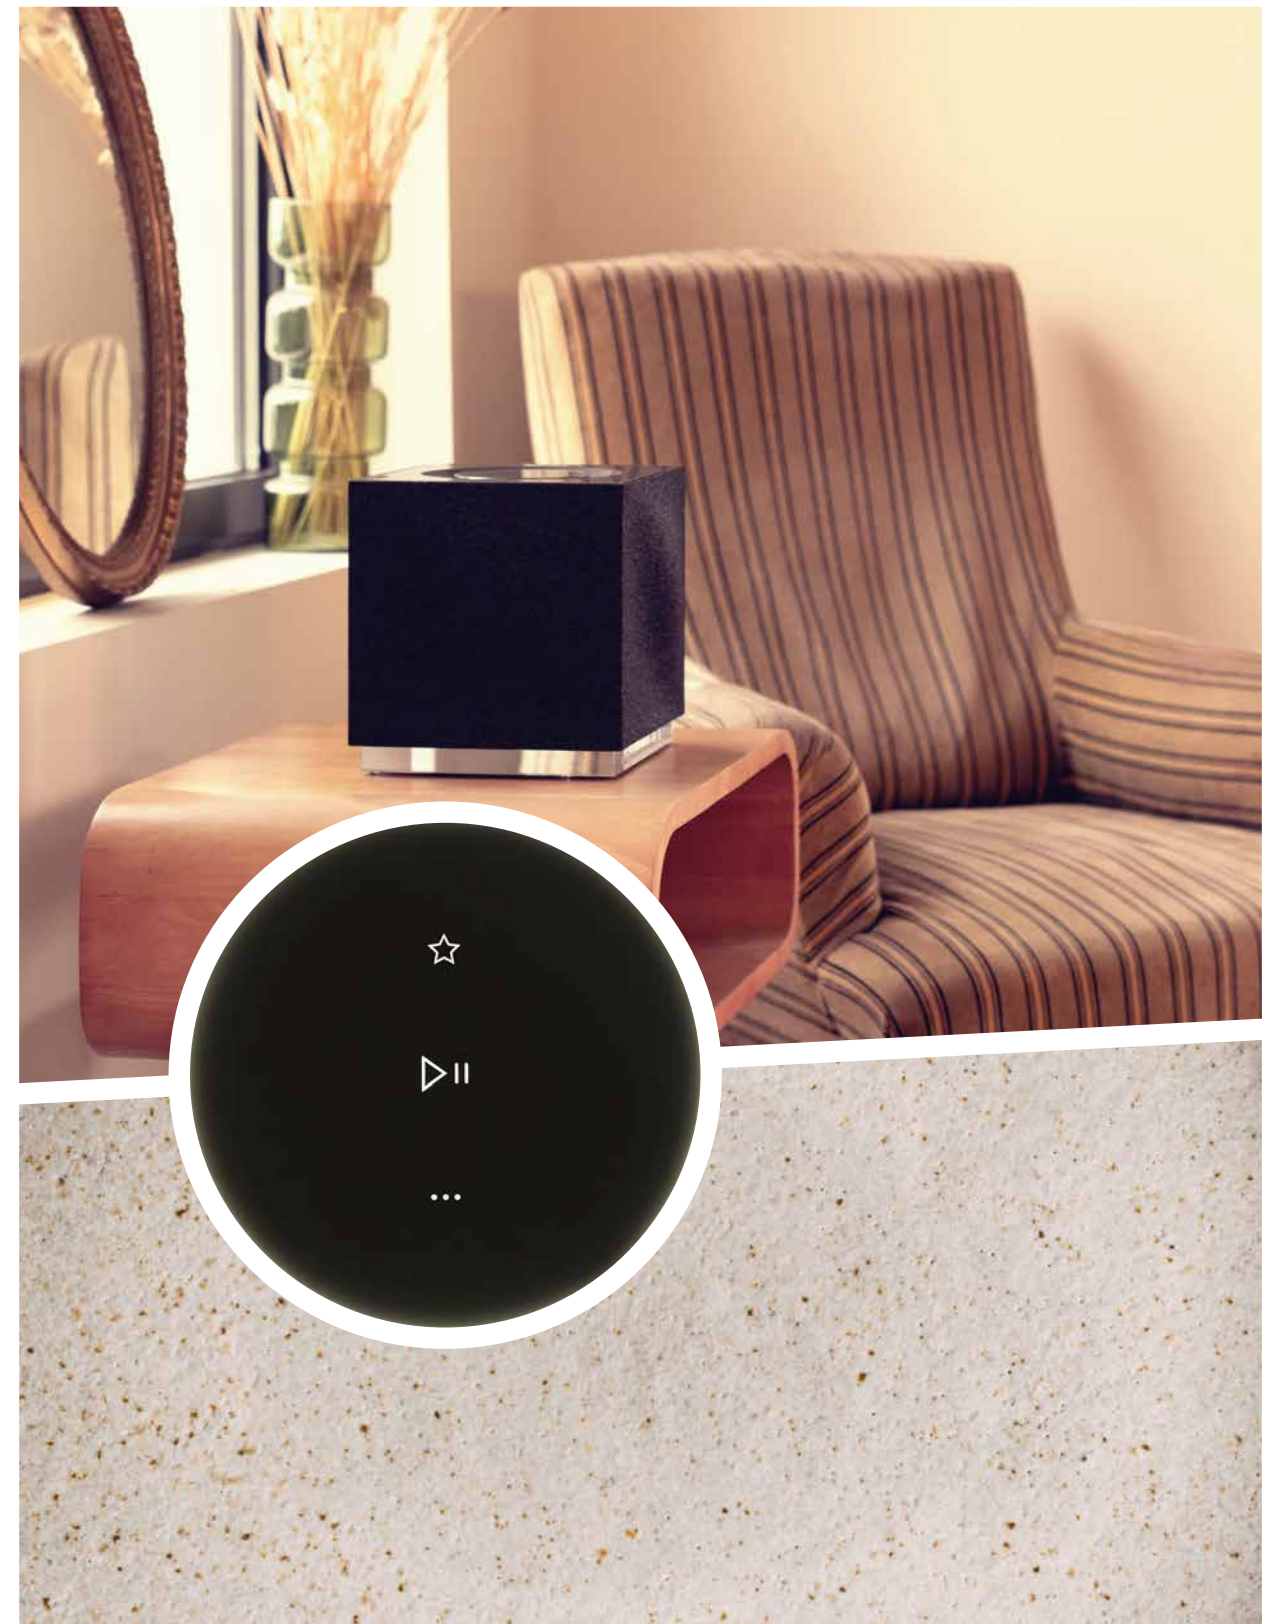


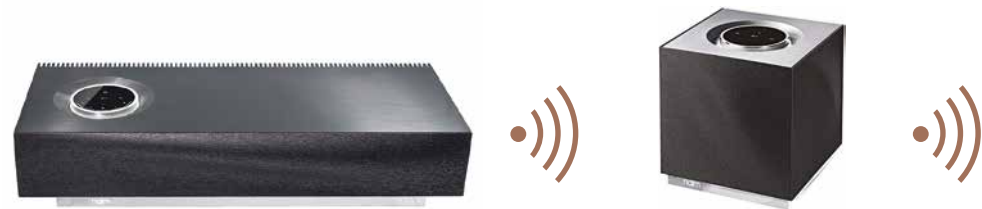


	MU-SO 2 ND GENERATION	MU-SO QB 2 ND GENERATION
Type	3-way bass-reflex stereo connected speaker	3-way stereo connected compact speaker with passive radiator
HDMI	ARC and CEC	-
Streaming	Apple AirPlay 2, Chromecast Built-in, UPnP™, Spotify® Connect, TIDAL, Roon Ready, Bluetooth, Internet Radio, Qobuz	Apple AirPlay 2, Chromecast Built-in, UPnP™, Spotify® Connect, TIDAL, Roon Ready, Bluetooth, Internet Radio, Qobuz
Audio Inputs		
Analogue	3.5mm Jack	3.5mm Jack
USB	USB 2 (Type A connector)	USB 2 (Type A connector)
Digital optical toslink	S/PDIF up to 24bit/96kHz	S/PDIF up to 24bit/96kHz
Finishes	Burnished and anodised aluminium casework, CNC milled, bead blasted and anodised aluminium heatsinks, dual-tone grey and black fabric grille	Burnished and anodised aluminium casework, CNC milled, bead blasted and anodised aluminium heatsinks, dual-tone grey and black fabric grille
Power	Amplifier Output 450W - (6 x 75W)	Amplifier Output 300W - (4 x 50W, 1 x 100W)
Dimensions (HxWxD)	4¾ x 24¾ x 10⅝" (12.2 x 62.8 x 26.4cm)	8¼x 8⅝x8⅝" (21 x 21.8 x 21.2cm)
Weight	24.7lbs (11.2kg)	12.35lbs (5.6kg)



Black



Peacock



Terracotta



Olive

MU-SO GRILLE

Compatible with the standard edition

MU-SO QB GRILLE

Compatible with the standard edition

COMMERCIAL SOLUTIONS


100-T SERIES 113




100-T SERIES

Focal sound for large spaces

The 100-T Series is a direct descendant of the 100 Series, but with the addition of a transformer that adjusts the power of the loudspeakers for 70V/100V systems. This makes it possible to cover a very large listening area and minimise amplifier channels. The compact design and low directivity of the speaker drivers make them incredibly discreet and musically uniform, whilst Focal's expertise guarantees your large spaces will have that incredible sound signature.

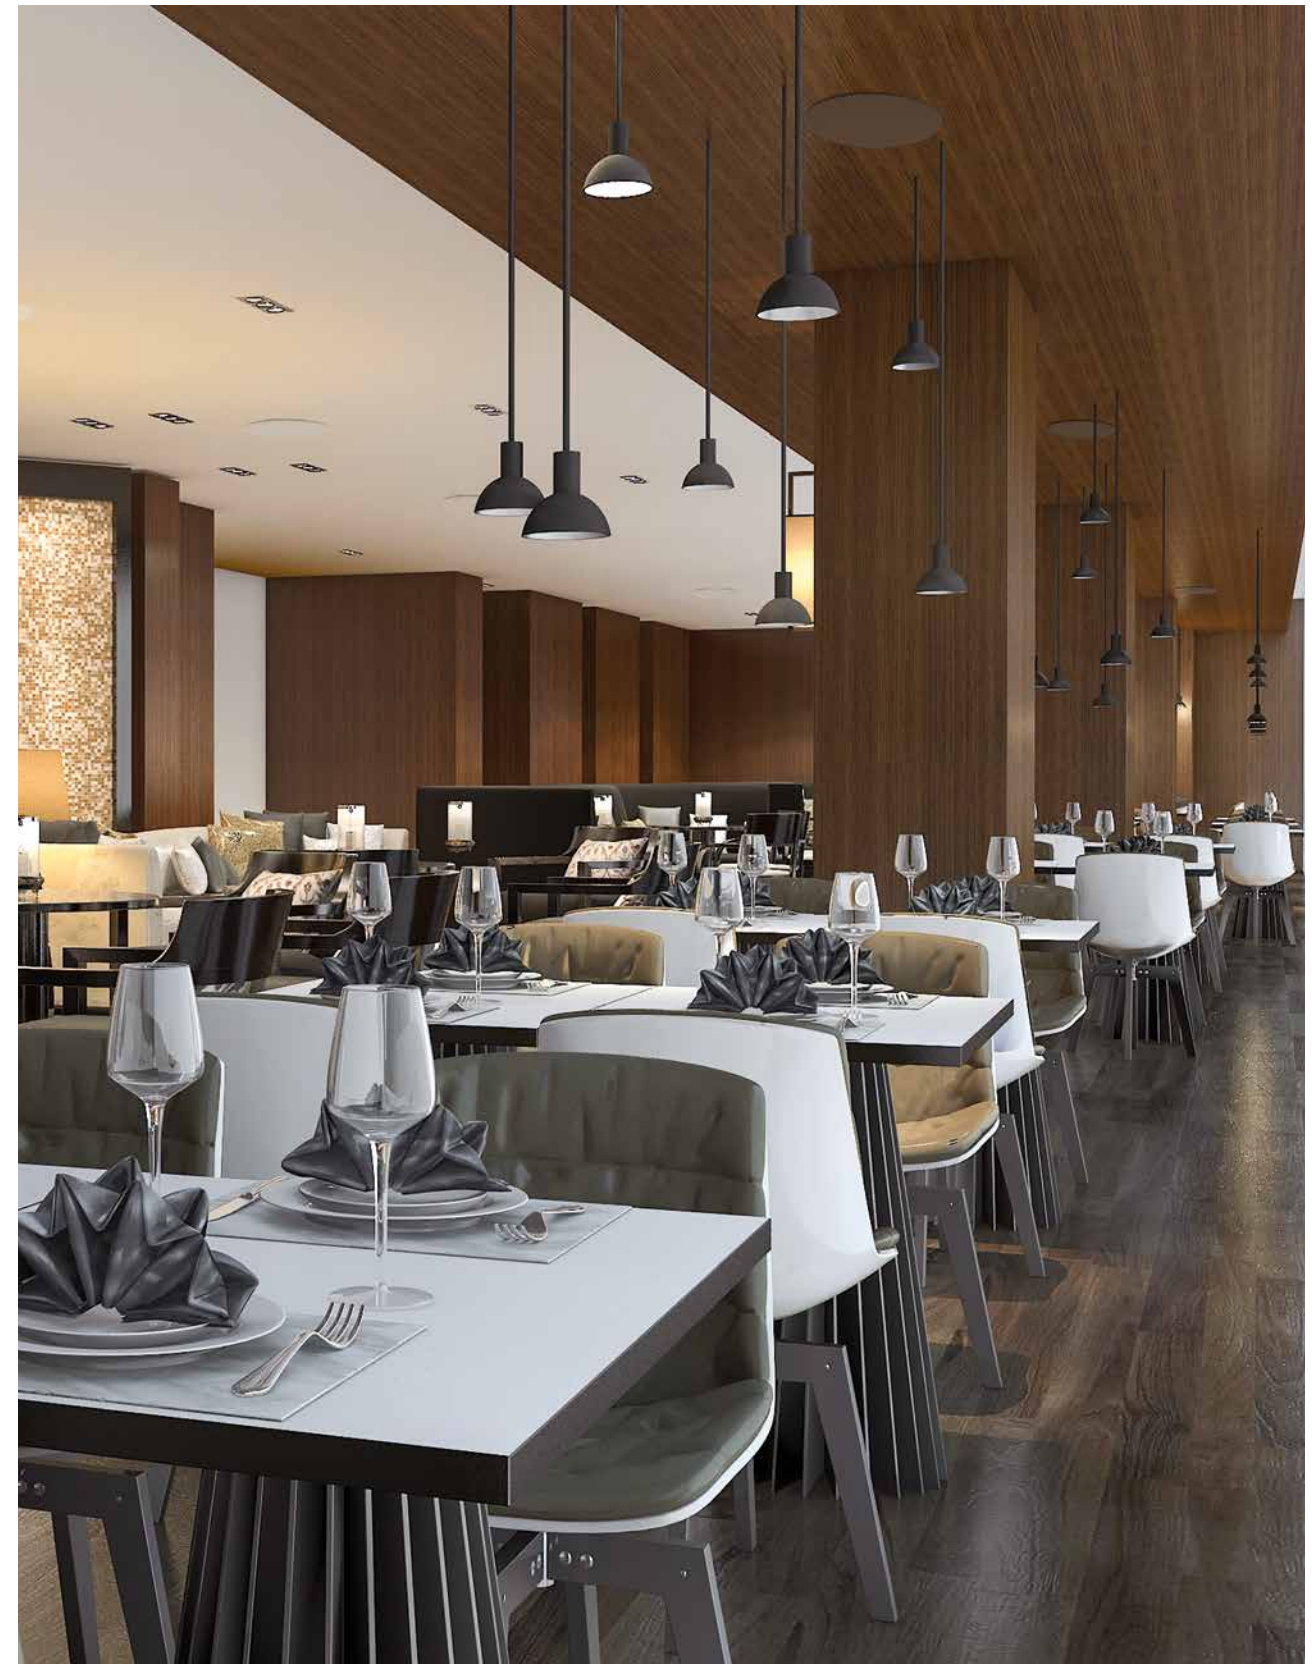




Polyglass
cone




Positionable
tweeter



Ready-to-paint
grille



Euroblock
connector



Wide
dispersion



High impedance
70V/100V





100 ICW8-T



100 ICW6-T



100 ICW5-T

Type	2-way coaxial in-wall/in-ceiling 100V/70V line installation	2-way coaxial in-wall/in-ceiling 100V/70V line installation	2-way coaxial in-wall/in-ceiling 100V/70V line installation
Speaker drivers	<ul style="list-style-type: none"> 8" (21cm) Polyglass Mid-Bass 1" (25mm) Aluminium inverted dome tweeter 	<ul style="list-style-type: none"> 6" (16.5cm) Polyglass Mid-Bass 1" (25mm) Aluminium inverted dome tweeter 	<ul style="list-style-type: none"> 5" (13cm) Polyglass Mid-Bass 1" (25mm) Aluminium inverted dome tweeter
Frequency response	53Hz - 23kHz	62Hz - 23kHz	65Hz - 23kHz
Power in 70V	7.5/15/30W	4/7.5/15W	2/4/7.5W
Power in 100V	15/30/60W	7.5/15/30W	4/8/15W
Sensitivity (2.83V/1m)	90dB	89dB	88dB
Nominal impedance	8Ω	8Ω	8Ω
Recommended amp power	25 - 100W	25 - 100W	15 - 100W
Dimensions (ØxP)	9¾ x 4¾" (24.8 x 11.1cm)	8¾ x 3¾" (20.8 x 9.5cm)	7¼ x 4" (18.4 x 10cm)
Mounting dimensions	8¾" (22.4cm)	7¼" (18.4cm)	6¾" (15.7cm)
Mounting depth	4¼" (10.7cm)	3¾" (9.1cm)	3¾" (9.6cm)
Weight (with grille)	5lbs (2.3kg)	3.75lbs (1.7kg)	3.5 lbs (1.6kg)



100 OD8-T



100 OD6-T



Type	Outdoor loudspeaker (IP66 certified)	Outdoor loudspeaker (IP66 certified)
Speaker drivers	<ul style="list-style-type: none"> 8" (21cm) Polyglass Mid-Bass 1" (25mm) Aluminium inverted dome tweeter 	<ul style="list-style-type: none"> 6½" (16.5cm) Polyglass Mid-Bass 1" (25mm) Aluminium inverted dome tweeter
Frequency response	60Hz - 23kHz	65Hz - 23kHz
Power in 70V	15/30/60 W	7.5/15/30 W
Power in 100V	30/60/120 W	15/30/60 W
Sensitivity (2.83V/1m)	88dB	87dB
Nominal impedance	8Ω	8Ω
Recommended amp power	20 - 150W	20 - 120W
Dimensions with brackets (HxWxD)	15 ⁵ / ₁₆ x 10 ³ / ₁₆ x 11" (39 x 25.8 x 28cm)	12 ⁹ / ₁₆ x 8 ¹³ / ₁₆ x 10 ¹ / ₁₆ (31.9 x 22.4 x 25.6cm)
Finishes		
Weight	12.6lbs (5.8kg)	9lbs (4.1kg)

ACCESSORIES

Integrated loudspeakers

PRE-ASSEMBLY KITS

These kits allow you to precisely position in-wall and in-ceiling products in new builds. They comprise a mounting strip combined with a frame for the perfect placement of your loudspeakers.

Product compatibility

1000 IWLCR UTOPIA

2 X IWSUB UTOPIA

1000 IWSUB UTOPIA

1000 IWLCR UTOPIA & 1000 IWSUB UTOPIA

1000 IWLCR UTOPIA & 2 X 1000 IWSUB UTOPIA

1000 IWLCR6

1000 IW6

1000 ICW6

1000 ICA6

1000 ICLCR5

300 ICLCR5

300 IWLCR6

300 IW6

300 ICW8

300 ICW6

300 ICW4

100 IWLCR5

100 IW6

100 ICLCR5

100 ICW8 / 100 ICW8-T

100 ICW6 / 100 ICW6-T

100 IC6ST

100 ICW5 / 100 ICW-T

ON-WALL FRAMES

Mounted frames allow loudspeakers to be installed on walls. They are available in White High Gloss or raw, ready-to-paint finish. Slim, in-wall anti-vibration studs allow for easy installation.



Product compatibility

1000 IWLCR UTOPIA

1000 IWSUB UTOPIA

1000 IWLCR6

1000 IW6

FIRE BACKCAN

Designed with materials specially adapted to high temperatures, this fire-proof built-in casing ensures your installation is safe, for perfect reliability. It also provides sound insulation.



TILTED STANDS

For a made-to-measure installation, a tilted stand is available as an accessory for Littora products, allowing you to determine the angle of the speaker drivers and diffuse the sound in the direction of your choice.



Product compatibility

LITTORA 1000 ICW10

LITTORA 1000 ICW8

LITTORA 200 ICW8

LITTORA 200 ICW6

Insulator	Product compatibility			Dimensions (HxWxD)
	1000 SERIES	300 SERIES	100 SERIES	
1 5/8" (40mm) ceramic fibre	1000 ICW6	300 ICW4 300 ICW6 300 IW6	100 ICW5 100 ICW6 100 ICW8 100 IC6ST 100 IW6	18 7/8" x 19" x 5 7/8" (478 x 482 x 149mm)





1000 SERIES



300 SERIES



100 SERIES



ON WALL 300



ASTRAL 16



'The 1000 Series goes even further in terms of acoustic performance and integration possibilities'

RESIDENTIAL TECH



'Stunning new flagship CI speaker range combines class-leading performance, unique technologies and extreme flexibility, for the ultimate integration experience'

HOME THEATER HIFI

'Among the easiest to fit in-ceiling loudspeakers on the market'

HOME CINEMA CHOICE



'Reference-grade sound from an in-wall speaker'

AUDIOHOLICS

'My day-to-day music listening and home theater system, without regret'

HOME THEATER

'The sound is rich, the soundscape large and there is more than enough bass in them'

L&B TECH REVIEWS

'Focal's 100 ICLCR5 is a rare exception of an in-ceiling speaker that does a great job reproducing your home theater's front soundstage'

CRUTCHFIELD

'An acoustic wall art for audiophiles keen on discretion'

ON MAG

'They will delight the passionate ones who are looking for a high-end solution dedicated to all uses'

COBRASON BLOG

'The next best thing to in-wall speakers'

WHAT HIFI



'An experience that was spine-tingling'

HOME CINEMA CHOICE

'This is high-end hardware fit for the finest of setups'

AVTECH MEDIA





DÔME FLAX

'Focal's Dôme Flax sound great anywhere'

DIGITAL TRENDS

'A lovely soundstage, fantastic neutrality, and great detail'

RESIDENTIAL SYSTEMS

'High-quality, ultra-compact, satellite style loudspeakers'

TRUSTED REVIEWS



SIB EVO

'An excellent immersive audio experience'

AVFORUMS



'Good clarity and excellent surround integration'

CNET



'Great solution for those looking for effective Dolby Atmos®'

TRUSTED REVIEWS



UNITI

'The looking is as impressive as the sound'

WHAT HI-FI



'Among a constellation of competitors, the Naim Uniti Nova is a shining star'

ROBB REPORT



'Pretty perfect. Cements Naim's reputation as the Aston Martin of the audio world'

FORBES



MU-SO

'The best wireless speakers deliver top sound quality'

T3



'Comfortably the best all-in one we looked at this year'

AV FORUMS



'Put simply, it's difficult to go back to any other wireless speaker after trying the Mu-so'

THE INDEPENDANT

COLLECTIONS

Combining performance and design, Focal's collections are a revelation, awakening the emotions : at home with hi-fi and in-wall/in-ceiling loudspeakers, Home Cinema systems and open-/closed-back headphones; on the go with incar kits; during travel with Bluetooth® Noise Cancelling Headphones; in the studio with monitors; for outdoor spaces and at sea with specialist yacht solutions.



Home Collection



Motorities Collection



Professional Collection


FOCAL *Powered by* naim

Enjoy an incredible sound experience

Find our products in 10,000 retail partner stores across the world, but also in our Focal Powered by Naim shops. These stores, dedicated to our brands, invite you to dive into our world, our savoir-faire and immerse yourself in the Focal & Naim sound.



www.focal.com/concept/fpbn-en/

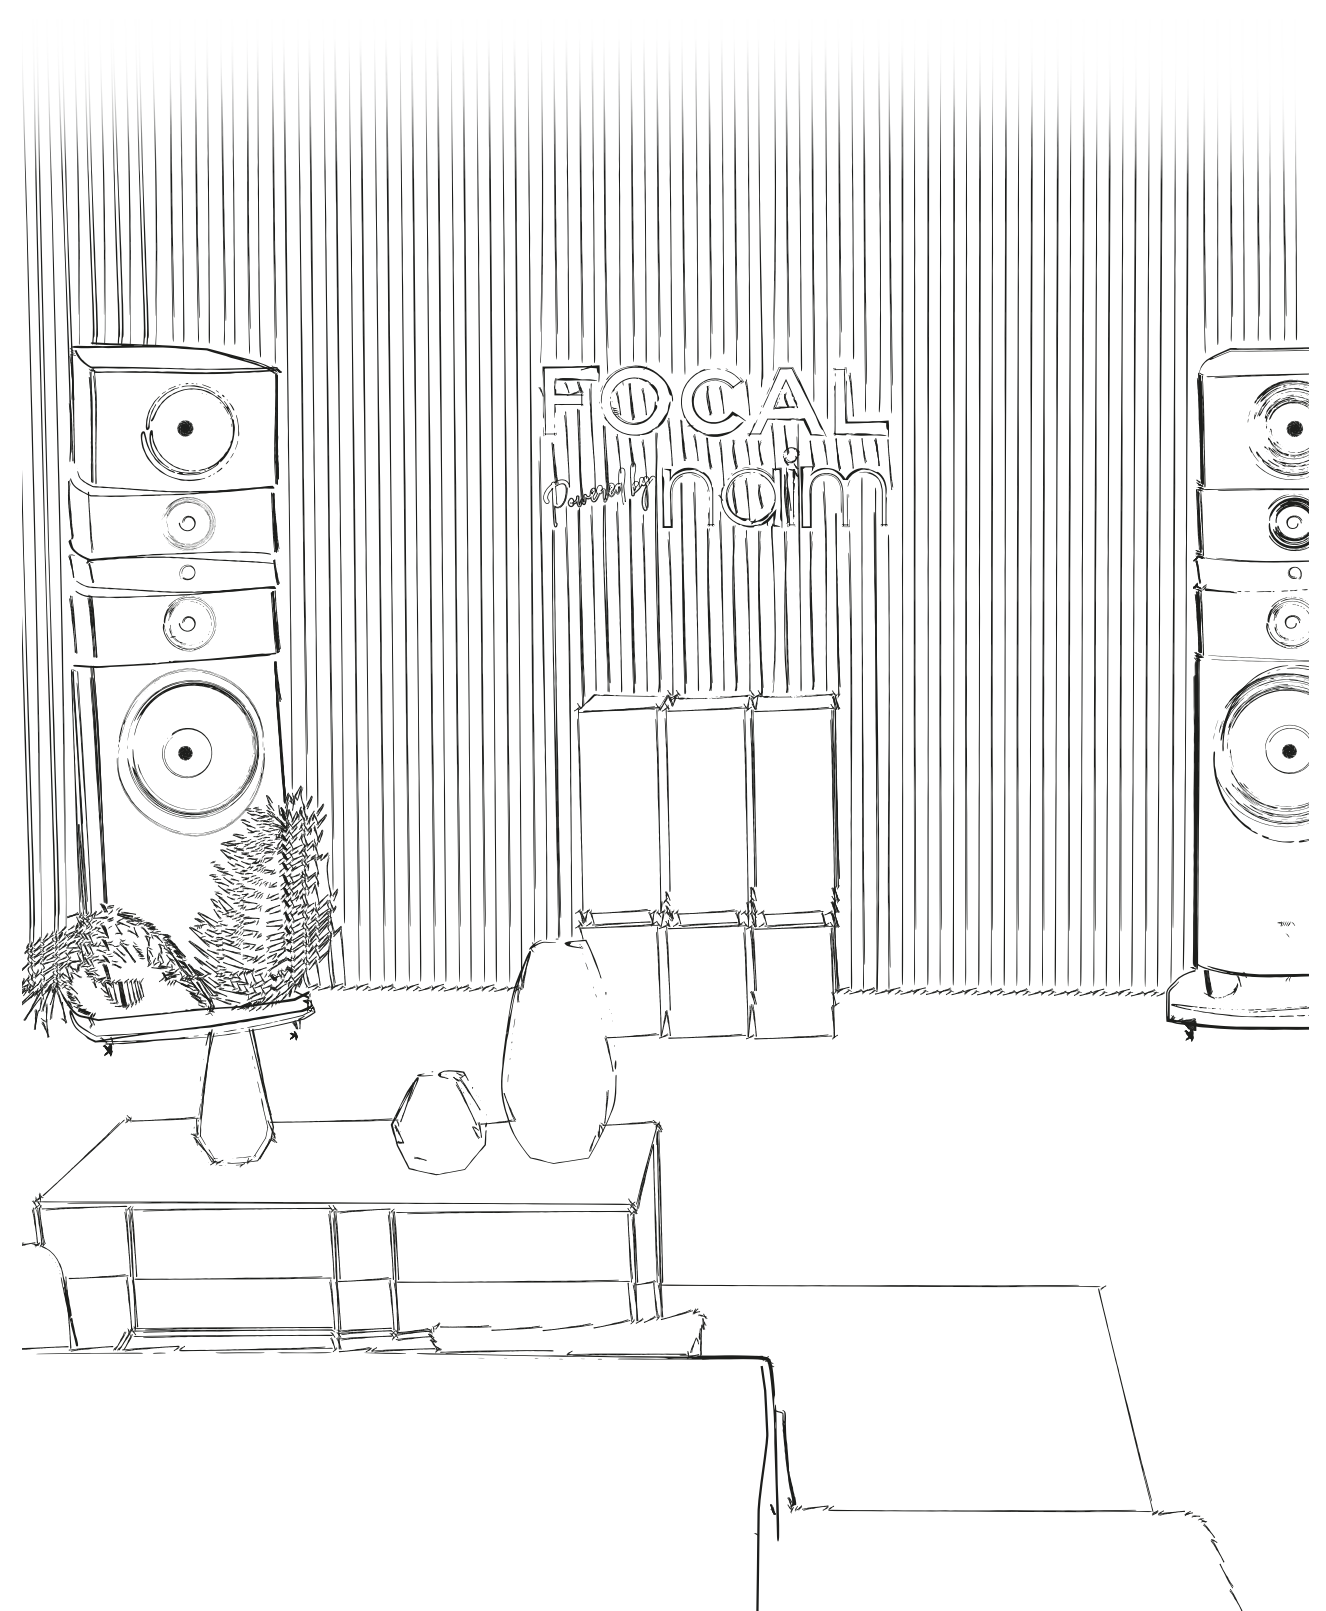



For more information, scan the QR code
or find us at:

www.focal.com



Focal JMLab®

BP 374 - 108, rue de l'Avenir - 42353 La Talaudière cedex - France - +33 (0) 477 435 700

Focal® is a registered trademark of Focal JMLab®, Naim® is a registered trademark of Naim Audio®.
Due to constant technological advances, Focal JMLab® and Naim Audio® reserve the right to modify prices and specifications without notice.
Non-binding pictures. Pictures : L'Atelier Sylvain Madelon / Envato Elements. SCAA/30/01/2024 - v3
Paper: sourced from sustainably managed forests. Printing: DEUX-PONTS Manufacture d'Histoires - France

