

K2 POWER ES 165 K

Woofer 6^{1/2}"




- K2 Power sandwich cone
- "TMD" surround (patented technology)
- Aluminum basket

SPECIFICATIONS

Nominal power	100W
Maximum power	200W
Sensitivity (2,83V/1m)	90.8dB
Cone	Kevlar sandwich
Nom. impedance	4Ω
Surround	Butyl
DC resistance	3.2Ω
VC diameter	32mm 1 ^{17/64} "
Former	Kapton
Layers	2
Wire	CCA
Magnet (d x h)	90x20mm 3 ^{35/64} x0 ^{25/32} "
Net weight	1350g 3lbs


FREQUENCY RESPONSE/IMPEDANCE

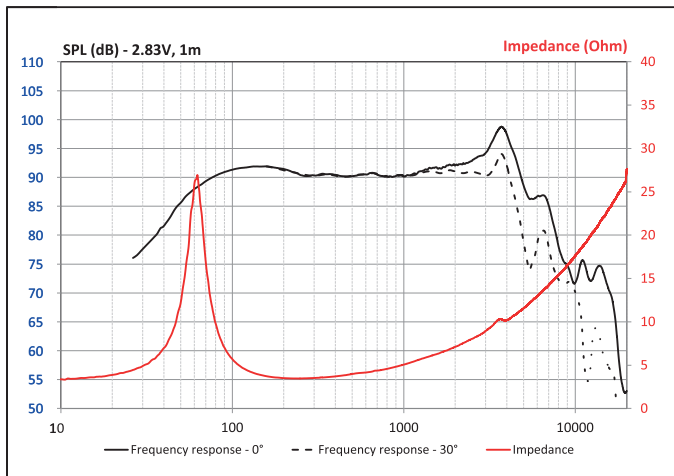

PARAMETERS

Rdc	3.2 Ω
Fs	64Hz
Mms	14.5g
Cms	0.41mm/N
Vas	10l
Qts	0.62
Qes	0.69
Qms	5.7
Bxl	5.2 N/A
Sd	128.6cm ²
SPL	89dB
Xmax	4.5mm

MECHANICAL DRAWING

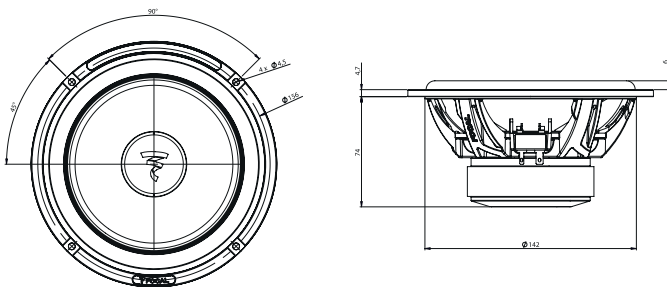

Elite

"HAUTE COUTURE" SOUND



FOCAL[®]
THE SPIRIT OF SOUND