

RIP LINE

100 C [100 Watts]

SPECIFICATIONS

Nominal power	30W	
Maximum power	100W	
Sensitivity (2.83V/m)	88dB	
Cone	Polypropylene	
Surround	Rubber	
Nom. impedance	4 Ohms	
DC resistance	3.4 Ohms	
VC diameter	25.5mm	1"
VC height		
Former	Kapton	
Layers	2	
Wire	Copper	
Inductance		
Xmax		
Magnet	76x12mm	3x1/2"
Magnet weight		
Flux density		
Gap height		
Net weight		

PARAMETERS


Fs	109.96Hz
Vas	1.54 litres
Qts	0.91
Qes	1.01
Qms	8.43
Re	3.4 Ohms
Sd	55.42cm ²
Cas	1.10E-0,8m ⁵ /N
Mas	190.81kg/m ⁴
Ras	
Cms	357µm/N
Mms	5.86g
Rms	0.480kg/s
Ces	420.08mF
Les	4.99mH
Res	29.05 Ohms
BI	3.73 N/A
SPL	84.9dB



KEY POINTS

- 1" (25.5mm) voice coil on Kapton former
- Dual layer voice coil
- Polypropylene cone
- High rigidity metal basket
- Rain cover integrated in basket

FREQUENCY RESPONSE

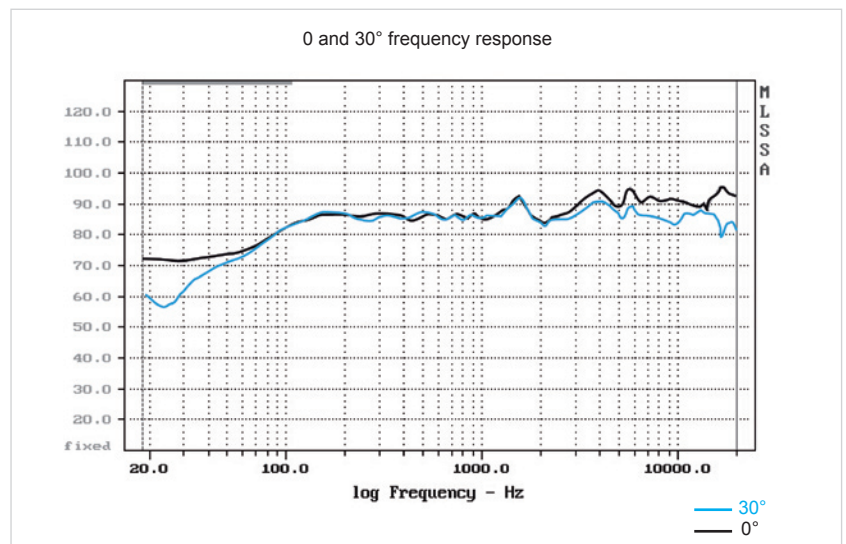

MECHANICAL DRAWING

