

RIP LINE

130 C (140 Watts)

SPECIFICATIONS

Nominal power	40W	
Maximum power	140W	
Sensitivity (2.83V/m)	90dB	
Cone	Polypropylene	
Surround	Rubber	
Nom. impedance	4 Ohms	
DC resistance	3.4 Ohms	
VC diameter	25.5mm	1"
VC height		
Former	Kapton	
Layers	2	
Wire	Copper	
Inductance		
Xmax		
Magnet	86x15mm	3 ³ / ₈ x9/16"
Magnet weight		
Flux density		
Gap height		
Net weight		

PARAMETERS


Fs	93.06Hz
Vas	2.80 litres
Qts	0.90
Qes	1.01
Qms	8.28
Re	3.4 Ohms
Sd	83.32cm ²
Cas	2.00 ^F -0.8m ⁵ /N
Mas	146.48kg/m ⁴
Ras	
Cms	288μm/N
Mms	10.17g
Rms	0.718kg/s
Ces	500.68mF
Les	5.84mH
Res	28.28 Ohms
BI	4.50 N/A
SPL	85.3dB



KEY POINTS

- 1" (25.5mm) voice coil on Kapton former
- Dual layer voice coil
- Polypropylene cone
- High rigidity metal basket
- Rain cover integrated in basket

FREQUENCY RESPONSE

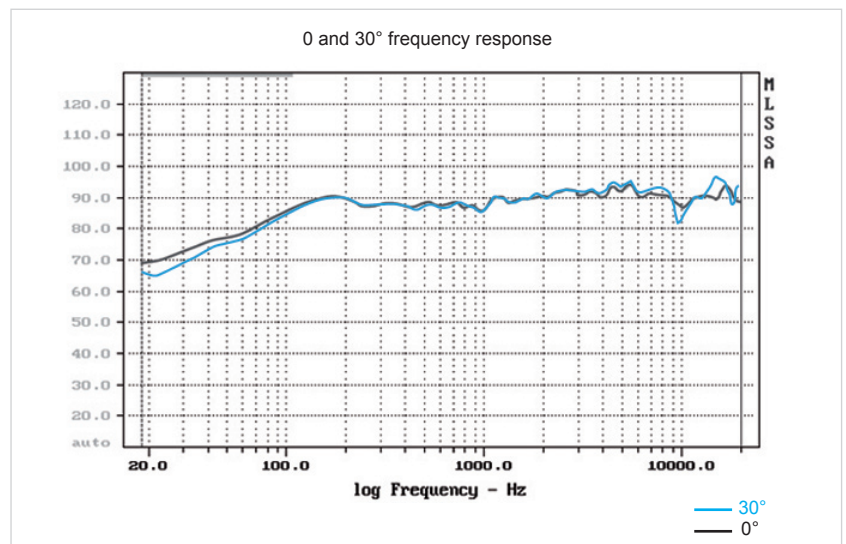

MECHANICAL DRAWING

