

RIP LINE

130 S (150 Watts)

SPECIFICATIONS

Nominal power	50W	
Maximum power	150W	
Sensitivity (2.83V/m)	90dB	
Cone	Polypropylene	
Surround	Rubber	
Nom. impedance	4 Ohms	
DC resistance	3.4 Ohms	
VC diameter	25.5mm	1"
VC height		
Former	Kapton	
Layers	2	
Wire	Copper	
Inductance	0.21	
Xmax		
Magnet	86x15mm	3 ¹ / ₈ x9/16"
Magnet weight		
Flux density		
Gap height		
Net weight		

PARAMETERS

Fs	95.83Hz
Vas	3.08 litres
Qts	0.76
Qes	0.83
Qms	6.53
Re	3.4 Ohms
Sd	83.2cm ²
Cas	2.19E-0.8m ⁵ /N
Mas	125kg/m ⁴
Ras	
Cms	401µm/N
Mms	8.73g
Rms	0.80kg/s
Ces	426.36mF
Les	6.47mH
Res	25.44 Ohms
Bl	4.53 N/A
SPL	86.83dB

KEY POINTS

Woofers

- 1" (25.5mm) voice coil on Kapton former
- Dual layer voice coil
- Phase plug
- Polypropylene cone
- High rigidity metal basket
- Rain cover integrated in basket

Tweeter


- 1" (25.5mm) voice coil
- Neodymium magnet with ferrofluid
- Flush and surface mounting accessories

Crossover

- 12 dB/octave highpass crossover



FREQUENCY RESPONSE

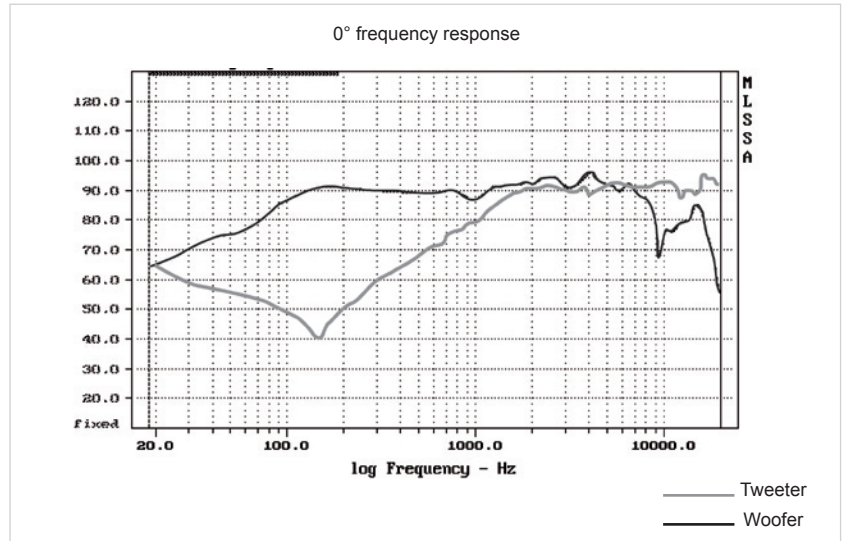

MECHANICAL DRAWING

