

RIP LINE

165 C (180 Watts)

SPECIFICATIONS

Nominal power	50W	
Maximum power	180W	
Sensitivity (2.83V/m)	91dB	
Cone	Polypropylene	
Surround	Rubber	
Nom. impedance	4 Ohms	
DC resistance	3.4 Ohms	
VC diameter	25.5mm	1"
VC height		
Former	Kapton	
Layers	2	
Wire		
Inductance		
Xmax		
Magnet	86x15mm	3 3/8"x9/16"
Magnet weight		
Flux density		
Gap height		
Net weight		

PARAMETERS


Fs	62.21Hz
Vas	11.62 litres
Qts	0.91
Qes	1.03
Qms	7.50
Re	3.4 Ohms
Sd	141.03cm ²
Cas	8.27E-08m ⁵ /N
Mas	79.14kg/m ⁴
Ras	
Cms	416µm/N
Mms	15.74g
Rms	0.820kg/s
Ces	768.25mF
Les	8,52 mH
Res	29.98 Ohms
BI	4.53 N/A
SPL	86.2dB



KEY POINTS

- 1" (25.5mm) voice coil on Kapton former
- Dual layer voice coil
- Polypropylene cone
- High rigidity metal basket
- Rain cover integrated in basket

FREQUENCY RESPONSE

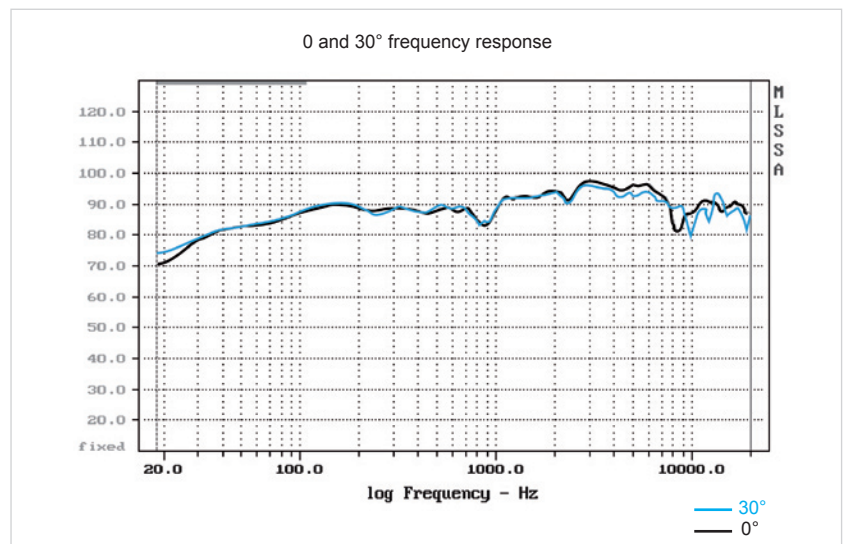

MECHANICAL DRAWING

