


SOLID 1

Quality mono amplifier

• Small size
Easy integration in a vehicle

• Aluminum chassis
High thermal dissipation

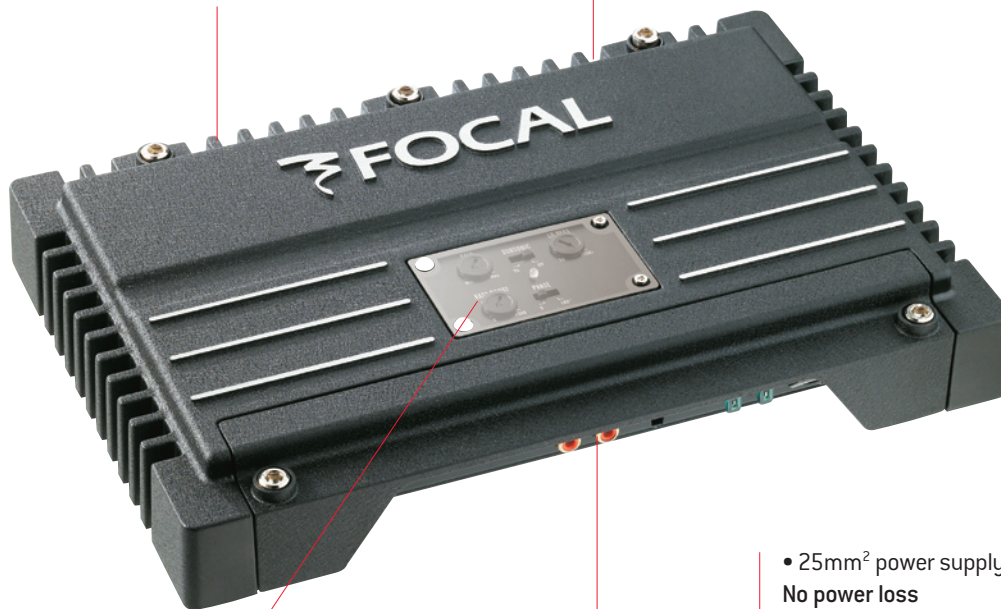

• Remote control
Keep the control



• Subsonic and low-pass crossover
Numerous settings available

- 25mm² power supply terminal
No power loss
- "Auto Power On" on the high-level input
Easy wiring
- High and low-level inputs
Suits any installation
- High safety
Protection against any electrical damages
- Balanced inputs
Floating ground, no parasite nor other noises

Technical characteristics:

Power under 4 Ohms: 1x300W
Power under 2 Ohms: 1x470W
Power under 1 Ohm: 1x600W (SPL mode)
Signal/noise ratio: >85dB (A)
Bass Boost: 0 to +9dB
Adaptable phase: 0 or 180°
Adjustable gain
Dimensions (HxLxD): 45x300x200mm
Protections: Short-circuit, continuous current, thermal overload



It makes the difference:

- A SPL mode: 600W under 1 Ohm
- High-level input, fits the original system
- Very small size according to the power supplied
- Aluminum chassis
- Remote control

