

D CLASS PREMIUM AMPLIFIER FPX 2.750


Stereo

Powerfull and compact



- D Class stereo/mono amplifier
- Stable under 2 Ohms
- Audio Mos-Fets - Optimized efficiency
- High performance compact heat dissipation chassis
- High power and current dynamic reserve
- Included remote

MECHANICAL DRAWING

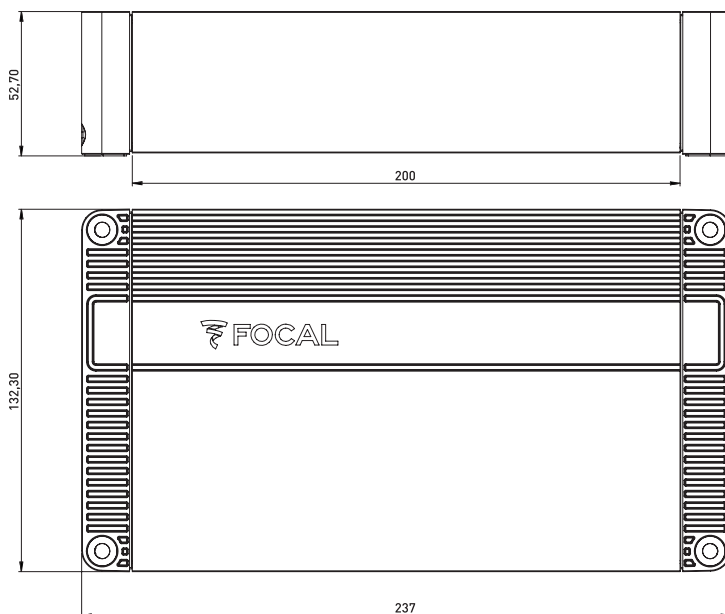

SPECIFICATIONS



AUDIO SPECIFICATIONS	
CEA power (4 ohms)	2x220 Watts RMS
Max. power (2 ohms)	2x385 Watts RMS
Max. power (4 ohms bridged)	1x770 Watts RMS
Bandwidth (-3dB)	20Hz - 20KHz
THD	0.01%
Crosstalk (1 KHz)	> 72dB
SNR (1W/A)	> 76dB
GENERAL FEATURES	
Subsonic filter	20Hz-50Hz (12dB/oct)
High-pass/low-pass filter	Configurable High-pass/low-pass 50Hz-500Hz
Bass boost	0 to 12dB linear
Phase	-
Full-range function	✓
Standby current (A)	0.95 A
Remote control	✓
Protections	Short circuit/low impedance/reverse polarity/DC/voltage drop/overheat protection
Dimensions (LxWxH)	9 ^{21/64} x5 ^{13/64} x2 ^{33/32} " (237x132x53mm)
Weight (kg)	4.40lbs (2kg)

