

Performance PS 130



5" Performance woofer




- Polyglass cone
- Aluminum basket
- Butyl surround

SPECIFICATIONS

Nominal power	60W	
Maximum power	120W	
Sensitivity	91.4dB	
Cone	Polyglass	
Surround	Butyl	
Nom. impedance	4 Ohms	
DC resistance	3.20 Ohms	
VC diameter	25mm	
VC height	11mm	
Former	Kapton	
Layers	2	
Wire	Copper	
Inductance	0.15mH	
Xmax	3mm	0 ^{1/18} in
Magnet d x h	85 x 17mm	3 ^{1/3} x 0 ^{2/3} in
Magnet weight	215g	0.47 lb
Flux density	-	
Gap height	5mm	0 ^{3/16} in
Net weight	950g	2.09 lb

FREQUENCY RESPONSE / IMPEDANCE

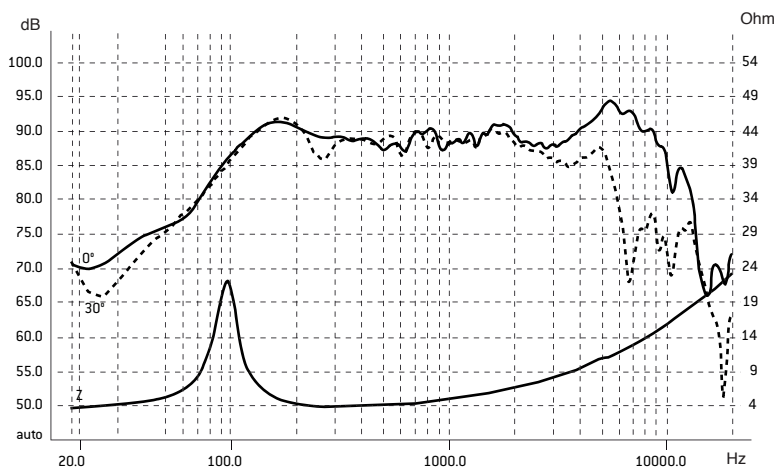

PARAMETERS

Fs	95.56Hz	
Vas	2.95 l	
Qts	0.65	
Qes	0.72	
Qms	6.26	
Re	3.20 Ohms	
Sd	86.59cm ²	
Cas	2.36E-8m ⁵ /N	
Mas	117.63 kg/m ⁴	
Ras	11282.71 Ohms.ac	
Cms	315µm/N	
Mms	8.82g	
Rms	0.846kg/s	
Ces	374.75mF	
Les	7.40mH	
Res	27.82 Ohms	
BI	4.85N/A	
SPL	87.40dB/W/m	

MECHANICAL DRAWING

Unit: mm

