

# Integration Tweeter TNI 1.5




Three different mounting possibilities:

- Flush mounting
- Surface mounting
- Tilted mounting

## SPECIFICATIONS

Nominal power	15W
Maximum power	100W
Sensitivity (2.83V/1m)	94dB
Integrated crossover	6dB/oct.
Cone	Alu
Surround	Cloth
Nom. impedance	4 Ohms
DC resistance	3.7 Ohms
VC diameter	20mm $\uparrow$ 3/16"
Former	Kapton®
Layers	2
Magnet	Neodymium
Flux density	-
Gap height	2.5mm $0$ 1/8"
Net weight	60g 0.3lb

## FREQUENCY RESPONSE / IMPEDANCE

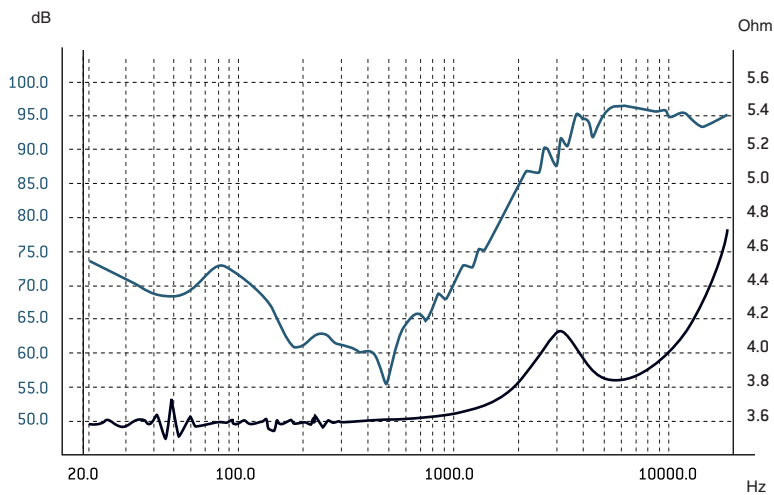

## PARAMETERS

Fs	2950Hz
Re	3.7 Ohms
Sd	4.9cm <sup>2</sup>
Res	4.1 Ohms
SPL	91dB/W/m

## MECHANICAL DRAWING

Unit: mm

