

Integration 100 VRS




- Zamak chassis
- Polyglass cone, Butyl surround
- Neodymium magnet

SPECIFICATIONS

Nominal power	40W	
Maximum power	80W	
Sensitivity	91 dB	
Cone	Polyglass	
Surround	Butyl	
Nom. impedance	4 Ohms	
DC resistance	3.2 Ohms	
VC diameter	25mm	1"
VC height	8mm	0 ^{5/16} "
Former	Kapton®	
Layers	2	
Wire	Copper	
Inductance	0.2mH	
Xmax	2mm	0 ^{1/16} "
Magnet d x h	-	
Magnet weight	-	
Flux density	1.1T	
Gap height	3mm	0 ^{5/18} "
Net weight	350g	0.77lb

FREQUENCY RESPONSE / IMPEDANCE

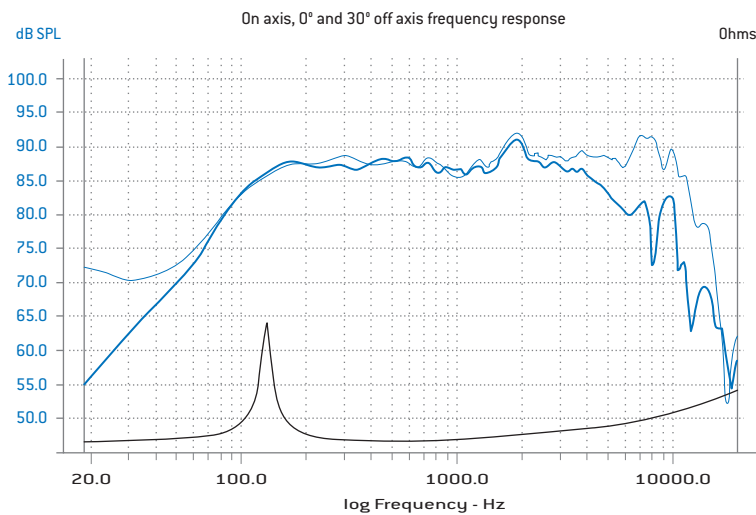

PARAMETERS

Fs	117.66Hz	
Vas	1.43 l	0.05Ft ³
Qts	0.811	
Qes	0.880	
Qms	10.410	
Re	3.55 Ohms	
Sd	52.81cm ²	8.18in ²
Cas	1.02 E-08m ⁵ /N	
Mas	179.28kg/m ⁴	
Ras	12731.89 Ohms.ac	
Cms	3.66 E-04m/N	
Mms	5.00g	0.01lb
Rms	0.355kg/s	
Ces	335.31mF	
Les	5.46mH	
Res	41.99 Ohms	
BI	3.86N/A	
SPL	86.08 dB/W/m	

MECHANICAL DRAWING

Unit: mm

