

# Integration 100 VRS




## 2-way kit

- Polyglass cone
- Neutral sound without coloration
- Butyl surround
- Resilient material, promoting long life
- 1" (25mm) Kapton® voice-coil former
- High power handling
- Zamak chassis
- Strong rigid and non-magnetic chassis

- Adjustable tweeter level
- Level setting according to tweeter slot
- Air core inductors with a low serial resistance
- Less efficiency loss, insensitive to parasite
- Real 12/12 dB/oct. crossover
- Optimum coupling of woofer and tweeter
- Polypropylene capacitor
- Neutral reproduction of high frequencies

- Neodymium magnet
- Shallow woofer, easy installation
- Voice-coil cooling system
- Optimum reliability, performance consistency
- Engraved serial number
- Certificate of authenticity

- TNB inverted dome tweeter
- Detailed and non directive
- Double push-pull Neodymium magnet
- High linear tweeter
- Voice coil on aluminum former
- High dissipation characteristics

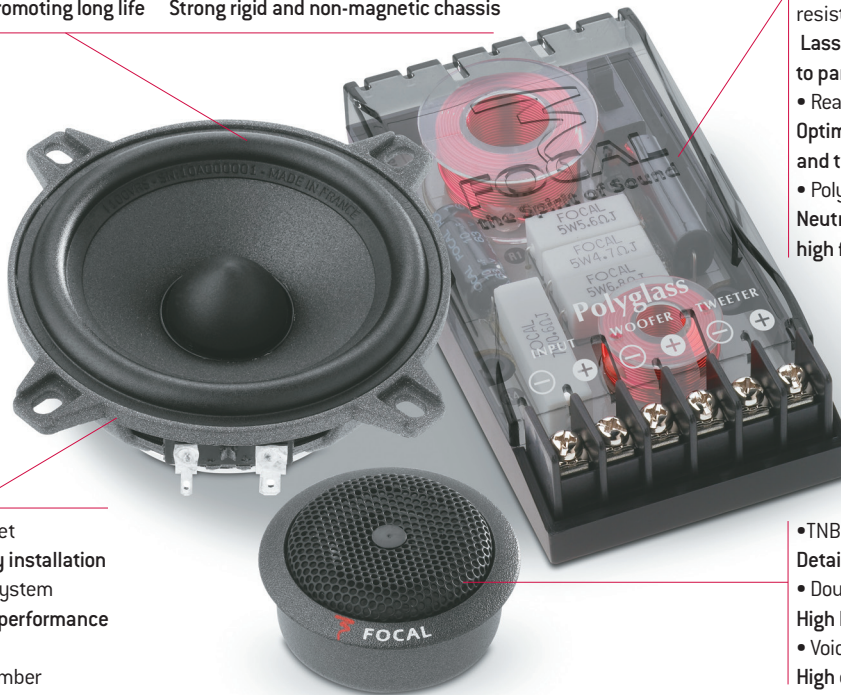

## ADVANTAGES

- Easy installation, shallow mounting woofer (1<sup>56</sup>" / 39.5mm)
- Outstanding musicality in this price level
- All Focal technologies

## TECHNICAL CHARACTERISTICS

Woofer: 4" (100mm)  
Voice-coil: 1" (25mm)  
Neodymium magnet  
TNB tweeter: 1 3/4" (45mm)  
Aluminum/magnesium inverted dome tweeter

2-way component crossover: 12/12dB/oct. (5.9kHz)  
Adjustable tweeter level: (0, -3, -6dB)  
Max. power: 80W  
Nom. power: 40W rms

Sensitivity (2.83V/1m): 91dB  
Frequency response: 90Hz – 28kHz  
Accessories: supplied grilles