

Integration 165 VRS




- Zamak chassis
- Polyglass cone, Butyl surround
- Neodymium magnet

SPECIFICATIONS

Nominal power	60W	
Maximum power	120W	
Sensitivity	93dB	
Cone	Polyglass	
Surround	Butyl	
Nom. impedance	4 Ohms	
DC resistance	2.7 Ohms	
VC diameter	32mm	1 1/4"
VC height	10mm	0 3/8"
Former	Kapton®	
Layers	2	
Wire	Copper	
Inductance	0.22mH	
Xmax	3mm	0 1/8"
Magnet d x h	-	
Magnet weight	350g	0.77lb
Flux density	1T	
Gap height	4mm	
Net weight	600g	1.32lb

FREQUENCY RESPONSE / IMPEDANCE

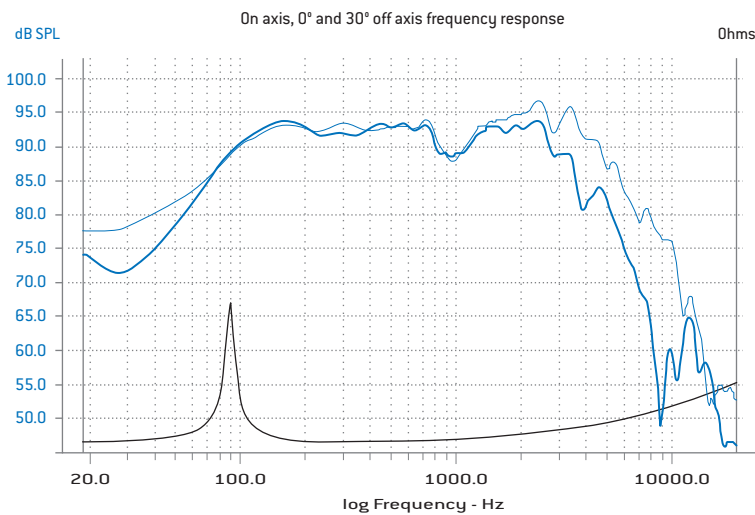

PARAMETERS

Fs	88.63Hz	
Vas	6 l	0.212Ft ³
Qts	0.659	
Qes	0.7	
Qms	11.31	
Re	2.7 Ohms	
Sd	132.73cm ²	20.57in ²
Cas	4.27 E-8m ⁵ /N	
Mas	75.49kg/m ⁴	
Ras	3717.03 Ohms.ac	
Cms	2.42 E-04m/N	
Mms	13.3g	0.03lb
Rms	0.655kg/s	
Ces	465.56mF	
Les	6.93mH	
Res	43.62 Ohms	
BI	5.34N/A	
SPL	89.6 dB/W/m	

MECHANICAL DRAWING

Unit: mm

