


CUSTOM IC 105

Product specification sheet

Aluminum grille
Can be painted

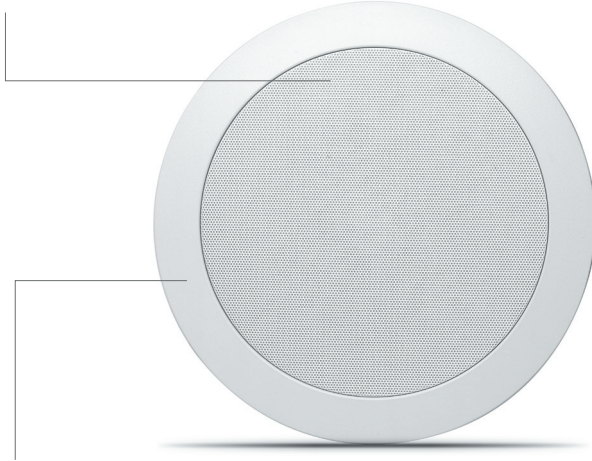

Aluminum inverted dome tweeter
- Extended response to 22kHz
- Low directivity




Reinforced white ABS chassis
- Very low vibration
- Can be painted.

5" (130mm) Fiberglass woofers
High power handling


FEATURES

- 100 % **Focal technologies.**
- **High power** handling.
- **Easy integration.**
- **Wall cut-out** template supplied.
- **Paint mask** supplied.
- Autoreset **polyswitch** fuse.
- **Splashproof**, design to work in **wet environment.**
- **The Focal sound.**



Wall bracket mounting
Quick and easy mounting

Type	In-ceiling speaker
Speakers	5" (130mm) fiberglass cone midbass 1" (25mm) aluminum inverted dome tweeter
Frequency response (+/-3dB)	65Hz - 20kHz
Sensitivity (2,83V/1m)	88dB
Nom. impedance	8Ω
Protection	Autoreset Polyswitch fuse
Max. power	100 Watts
Tweeter ajustement	-3dB/ 0dB/ +3dB
Crossover frequency	3300Hz
Frame size	Ø 7-7/8" (200mm)
Cut-out dimensions (HxW)	Ø 6-1/2" (165mm)
Depth from wall	3-5/16" (84mm)
Net weight	2.3lbs (1.1 kg)



FOCAL
the spirit of sound