


CUSTOM IC 106

Product specification sheet

Aluminum grille
Can be painted

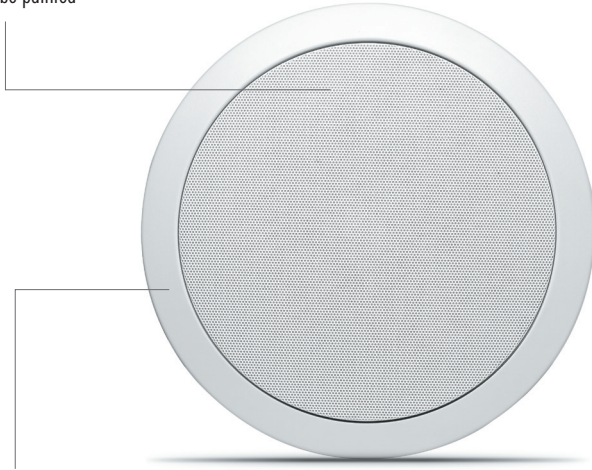

Adjustable tweeter level
Adjustable from -3 dB to +3 dB




Reinforced white ABS chassis
- Very low vibration
- Can be painted.

Aluminum inverted dome swivel tweeter
- Extended response to 20kHz
- Low directivity

6 1/2" (165mm) Fiberglass woofers
High power handling

FEATURES

- 100 % **Focal technologies.**
- **High power** handling.
- **Easy integration.**
- **Wall cut-out** template supplied.
- **Paint mask** supplied.
- Autoreset **polyswitch** fuse.
- **Splashproof**, design to work in **wet environment.**
- **The Focal sound.**



Wall bracket mounting
Quick and easy mounting

Type	In-ceiling speaker
Speakers	6-1/2" (165mm) fiberglass cone midbass 1" (25mm) aluminum inverted dome tweeter
Frequency response (+/-3dB)	60Hz - 20kHz
Sensitivity (2,83V/1m)	88dB
Nom. impedance	8
Protection	Autoreset Polyswitch fuse
Max. power	120 Watts
Tweeter ajustement	-3dB/ 0dB/ +3dB
Crossover frequency	3300Hz
Frame size	Ø 9-9/16" (243mm)
Cut-out dimensions (HxW)	Ø 8-3/16" (208mm)
Depth from wall	3-1/16" (78mm)
Net weight	3.4lbs (1.6kg)

