

# Integration IC 570



## 2-way coaxial kit




- Polyglass cone
- Reduced height
- Adjustable inverted dome tweeter

## SPECIFICATIONS

Nominal power	60W	
Maximum power	120W	
Sensitivity (2.83V/1m)	94.1dB	
Cone	Polyglass	
Surround	Butyl	
Nom. impedance	4 Ohms	
DC resistance	2.8 Ohms	
VC diameter	25.5mm	1"
VC height	11mm	0 7/16"
Former	Kapton	
Layers	2	
Wire	Copper	
Inductance	0.11mH	
Xmax	3mm	0 1/8"
Magnet d x h	85 x 15mm	3 1/3 x 0 9/16"
Magnet weight	190g	0.42 lb
Flux density	-	
Gap height	5mm	0 3/16"
Net weight	950g	2.09lb

## FREQUENCY RESPONSE / IMPEDANCE

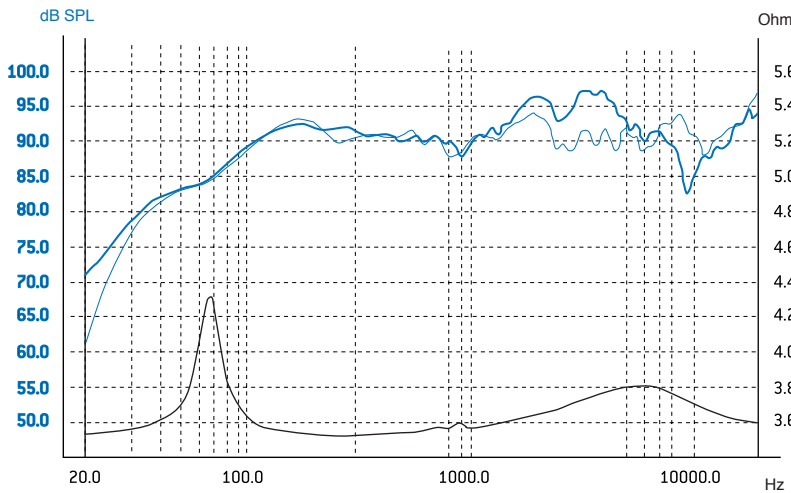

## PARAMETERS

Fs	74.12Hz
Vas	10.65 l
Qts	0.725
Qes	0.81
Qms	6.92
Re	2.8 Ohms
Sd	153.93cm <sup>2</sup>
Cas	7.58 E-8m <sup>5</sup> /N
Mas	60.81kg/m <sup>4</sup>
Ras	4092.43 Ohms.ac
Cms	320µm/N
Mms	14.41g
Rms	0.97kg/s
Ces	621.17mF
Les	7.42mH
Res	23.92 Ohms
BI	4.82N/A
SPL	89.13dB (Re)

## MECHANICAL DRAWING

Unit: mm

