

Performance PC 690



2-way coaxial kit

- Processed Aluminum inverted dome tweeter
Smoothness and definition without directivity
- Partial horn loading
Best positioning of the soundstage


- Butyl surround
Excellent reliability

- Polyglass cone
Neutral sound without coloration

- Tilted and rotary mounting
Orientation in the driver axis

- Integrated crossover
Easier connection

- Chrome magnet
Nice look

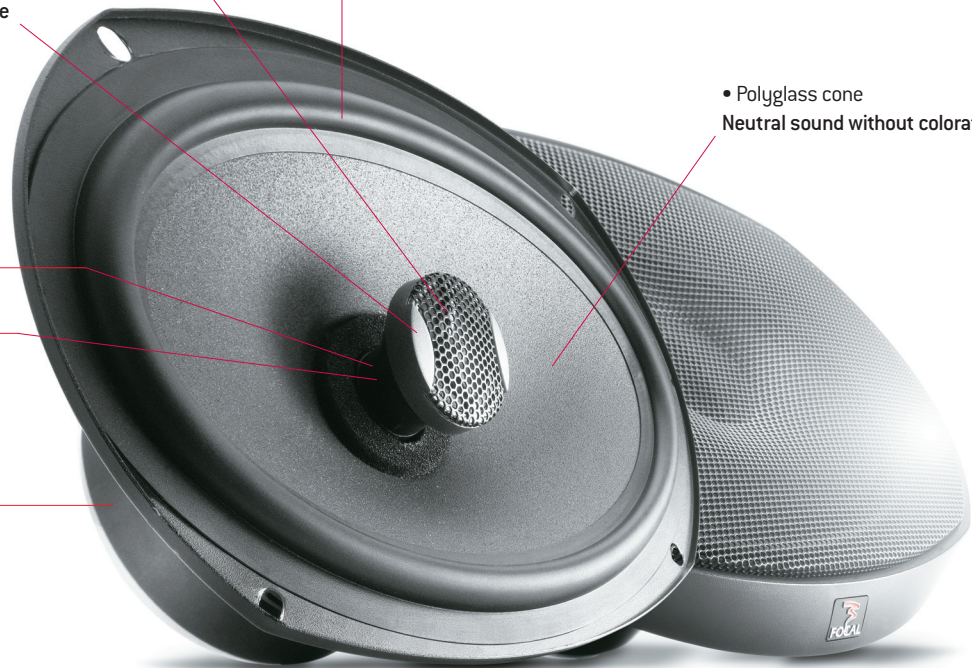

ADVANTAGES

- Partial horn loading tweeter
- High sensitivity
- High soundstage
- Dynamics and neutrality

TECHNICAL CHARACTERISTICS

Diameter: 6 x 9" (165 x 237mm)

Voice-coil diameter: 1^{3/16}" (30mm)

Voice-coil height: 0^{7/16}" (10.5mm)

Magnet: 3^{9/16}" (90mm)

Processed Aluminum inverted dome tweeter

Integrated crossover: 6dB/oct

Rotating tweeter

Max. power: 160 Watts

Nom. power: 80 Watts rms

Sensitivity (2.83V/1m): 93.6dB

Frequency response: 55Hz – 20kHz

Accessories: Supplied grilles