


# PROFILE CC 908

## Product specification sheet

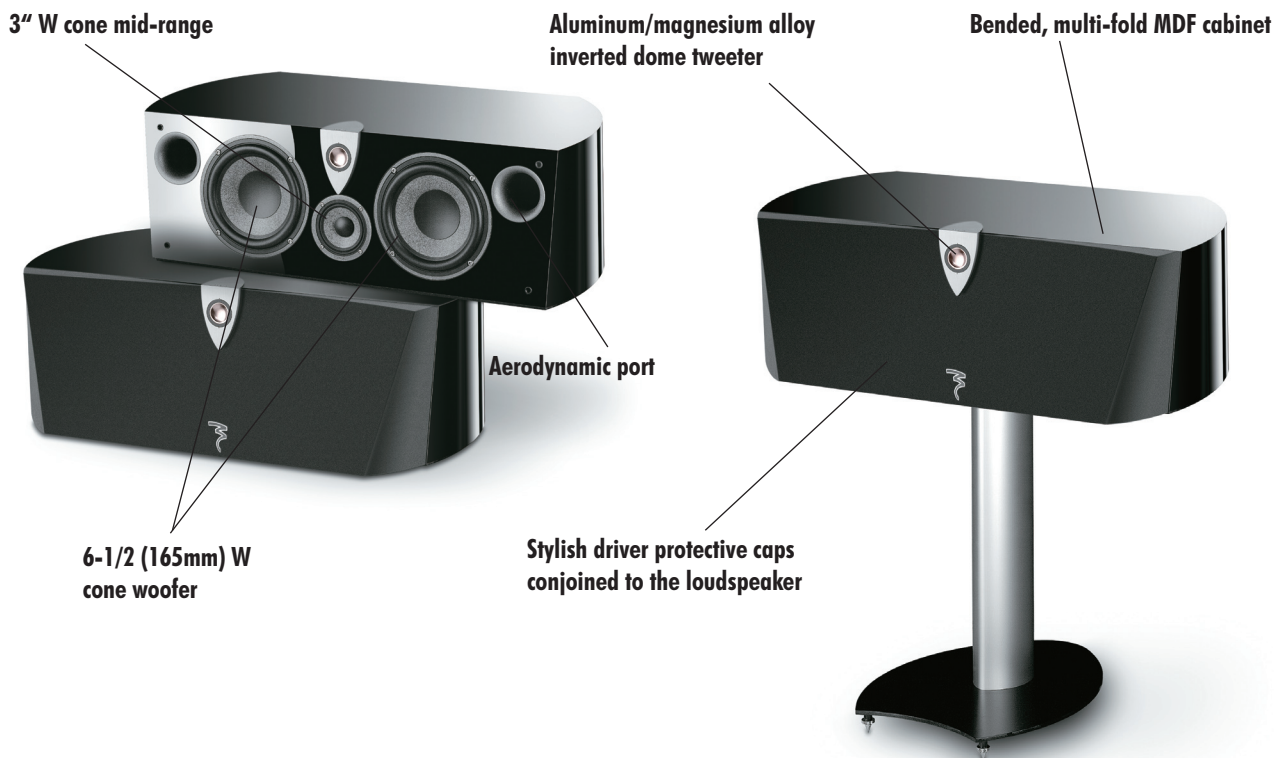

### Features

- **3-way** bass-reflex with coherent phase and constant energy.
- Optimized fitting with Profile 908 and 918 in multi-channel mode.
- A sophisticated design for maximum **performances and esthetic integration** capability.
- **Bended multi-fold MDF** cabinet for toughness and optimal damping.
- **Al/Mg alloy inverted dome tweeter**, Poron® surround, frequency response up to 30kHz, SACD and DVD-Audio compatibility.
- **"W" composite sandwich** cone woofer.
- 3" mid-range, ultra-compact with **very low directivity**.
- **OPC** filtering for perfect phase alignment and optimal directivity.
- **Diamond Black finish**.
- 15<sup>3/4</sup>" (40cm) dedicated optional stand **SCC 908**.

### Technical specifications

Type	3-way center loudspeaker
Drivers	1" (25mm) Al/Mg inverted dome tweeter, 3" (8cm) "W" cone midrange, 2 x 6 <sup>1/2</sup> " (165mm) "W" cone woofer
Frequency response (+/-3dB)	65Hz to 30.5kHz
Sensitivity (2,83V/1m)	91dB
Nom. impedance.	8Ω
Min. impedance	4.2Ω at 150Hz
Maximum power handling	150W
Crossover frequency	500Hz / 2 600Hz
Dimensions (HxWxD)	8 <sup>1/16</sup> "x24 <sup>7/8</sup> "x12 <sup>3/4</sup> " (205 x 632 x 324mm)
Net weight	32lbs (14.5kg)

