

EXPERT PS 130V

2 way kit




- Polyglass cone
- Aluminum basket
- Butyl surround

SPECIFICATIONS

Nominal power	60W	
Maximum power	120W	
Sensitivity (2,83V/1m)	91.4dB	
Cone	Polyglass	
Surround	Butyl	
Nom. impedance	4 Ohms	
DC resistance	3.20 Ohms	
VC diameter	25mm	1"
VC height	11mm	0.4"
Former	Kapton	
Layers	2	
Wire	Copper	
Inductance	0.15mH	
Xmax	3mm	0 ^{1/18} "
Magnet d x h	85mm x 17mm	3 ^{1/13} x 0 ^{2/3} "
Magnet weight	215gr	0.47 lb
Flux density	-	
Gap height	5mm	0 ^{3/16} "
Net weight	950g	2.09 lb


FREQUENCY RESPONSE/IMPEDANCE

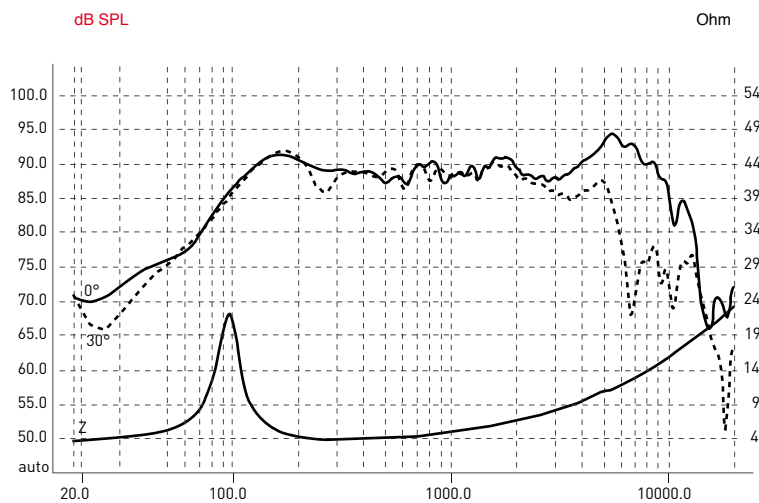

PARAMETERS

Fs	95.56Hz
Vas	2.95 l
Qts	0.65
Qes	0.72
Qms	6.26
Re	3.20 Ohms
Sd	56.59cm ²
Cas	2.36 E-8m ⁵ /N
Mas	117.63kg/m ⁴
Ras	11282.71 Ohms.ac
Cms	315µm/N
Mms	8.82g
Rms	0.846kg/s
Ces	374.75mF
Les	7.40mH
Res	27.82 Ohms
BI	4.85N/A
SPL	87.40 dB/W/m

MECHANICAL DRAWING

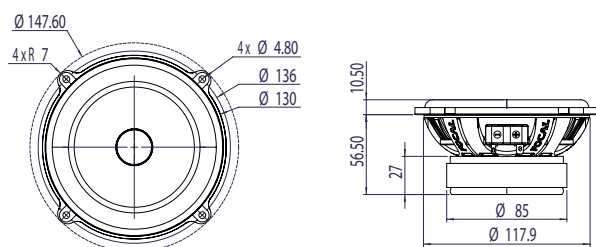

Performance
CREATE YOUR SOUND

FOCAL
THE SPIRIT OF SOUND