

UNIVERSAL ISN 130



2-way component kit

- Polyglass cone
Neutral sound without coloration

- Butyl surround
Resilient material, promoting long life
- Laser engraved serial number
Certificate of authenticity


- ABS chassis
Strong rigid and non-magnetic chassis

- Phase plug
Better dispersion

- TNB inverted dome tweeter
Detailed and non directive

- Terminal integrated to the basket
Compact

- Neodymium magnet
Shallow woofer, easy installation
- Voice-coil cooling system
Optimum reliability, performance consistency

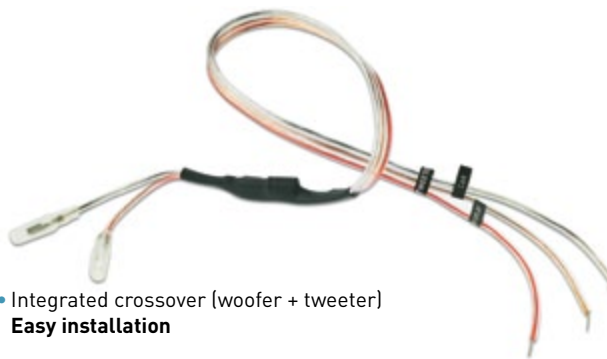

Removable ABS clips (2/3/4 holes fixing points)



Focal logo (aluminium -diamond cutting)



ISO connector (woofer)

ADVANTAGES

- Innovative basket fixing
- Removable clips supplied
- Neodymium magnet: powerful & compact: 67,4mm (with rubber cap) & 45 mm (without cap)
- Compatibility with shallow original space
- 2 tweeter support accessories



Removable tweeter



Tilted mounting
Easy installation



Assembly options:
car and display

TECHNICAL CHARACTERISTICS

Woofer: 5" (130mm)
Voice-coil diameter: 1 1/4" (32mm)
Voice-coil height: 0 7/16" (10,5mm)
Magnet: Neodymium

Aluminum inverted dome TNB tweeter
Integrated crossover: 6db/oct (Woofer) / 12 db/oct (Tweeter)
Max. power: 100W

Nom. power: 50W rms
Sensitivity (2,83 V/1 m): 91.7dB
Frequency response: 80Hz - 28kHz
Accessories: Supplied without grille.
Crossover on connector (woofer and tweeter).

